



Pushing Performance

HARTING Product Change Notification

PCN

Business Unit: Electronics

PCN/19/012/C+N

Product range: Interface connectors / Rundsteckverbinder inkl.
M12 PushPull

Date: 2019-03-25

Author: Matthias Domberg

Title: M12 Power L-code PFT - External

Details of Product Changes

1. Concerned part number (see also attachment):


21035961505, 21035961506, 21035961515, 21035961516, 21035962505, 21035962506, 21035962507, 21035962515, 21035962516, 21035991505, 21035991506, 21035991515, 21035991516, 21035992505, 21035992506, 21035992515, 21035992516, 21535961505, 21535961506, 21535961516, 21535962505, 21535962506, 21535962516, 21535991505, 21535991506, 21535991516, 21535992505, 21535992506, 21535992516

2. Description of changes / news:

Change – New Pin assignment!


OLD

Potenzial	Contact-Number M12 L-code	Color coding
L1	Pin 1	brown
N1	Pin 2	blue
L2	Pin 3	black
N2	Pin 4	white
FE	Pin FE	grey

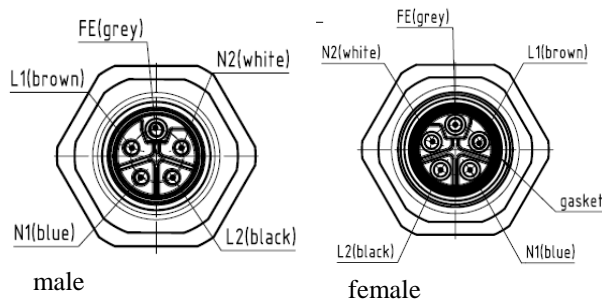

NEW

Potenzial	Contact-Number M12 L-code	Color coding
L1	Pin 1	brown
N1	Pin 3	blue
L2	Pin 4	black
N2	Pin 2	white
FE	Pin FE	grey

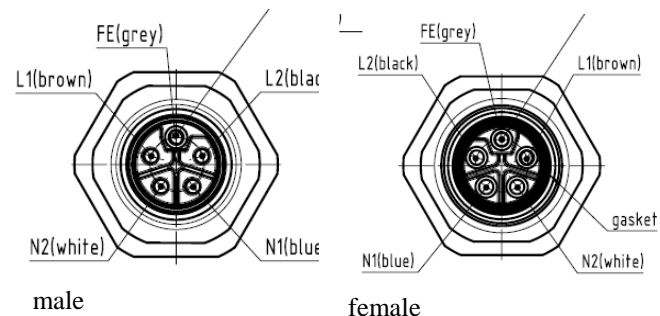

This change is in order to be compliance with the new PROFINET specification.

3. Impact on product specification:

No influence on mechanical or electrical values.



Pushing Performance

HARTING Product Change Notification

PCN

4. Scheduled date of implementation:

2019-03-01

5. Identification of change:

- *All concerned parts get a new revisionlevel*

6. Data sheet (optional):

- *New TB's in SAP aavailabled*