


Number of contacts

# 15-78

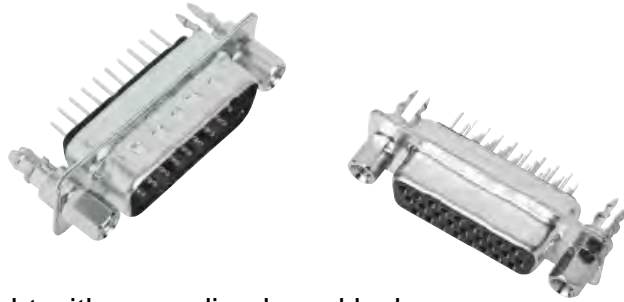

High density with stamped solder pins, straight with grounding board locks

Identification	No. of contacts	Part No.		
<b>Performance levels</b> Explanations see page 05.04 Other performance levels on request		Performance level <b>3</b>		S4 <sup>1)</sup>
<b>Male connector</b> metal shell with dimples				
<b>Female connector</b> metal shell				
Please insert digit for flange thread or fitted female screw locks  4-40 UNC ▶ 2 fitted screw locks 4-40 UNC ▶ 3				

D-Sub

<sup>1)</sup> S4 = 0.76 µm (30 µinch) Au or PdNi equivalent