



## PEL- 3000E Series


### FEATURES

- 1~150V(PEL-3031E) Min. Operating Voltage(dc):1V at 60A, 0.5V at 30A  
2.5~500V(PEL-3032E) Min. Operating Voltage(dc):2.5V at 15A, 1.25V at 7.5A
- 7 Operating Modes: CC, CV, CR, CP, CC+CV, CR+CV, CP+CV
- Fast/Normal Sequence Function
- Soft Start
- Battery Discharge Test
- OCP, OPP Test Automation
- Max. Slew Rate: 2.5A/ $\mu$ s
- Dynamic Mode
- Protection: OVP, OCP, OPP, OTP, RVP, UVP
- Remote Sense
- Integrate Voltage, Current and Power Measurement Functions
- External Voltage or Resistance Control
- Rear Panel BNC, Trigger IN/OUT
- Analog External Control
- USB/GPIB(Optional)

GW Instek launches new PEL-3000E series programmable single-channel electronic load. In the series, PEL-3031E provides 300W (1V~150V/60A) and PEL-3032E provides 300W (2.5V~500V/15A) current sink capability. Inherited from the PEL-3000 series, PEL-3031E has an easy-to-read LCD panel and user-friendly interface. This model features high speed and accurate measurement capability for electronic component, battery, portable charger and power products that require low to medium power consumption.

PEL-3000E series is not only ideal for charger/adaptor manufacturers with the requirements of over 60mA constant current load and measurement applications, but also for manufacturers of various power supply components and portable charging devices which demand the standby power consumption greater than 60mA. For manufacturers who require charger/adaptor with the constant current load and measurement applications lower than 60mA, we recommend the PEL-3000 series which has three current levels to meet low power consumption application requirements.

### SOFT START

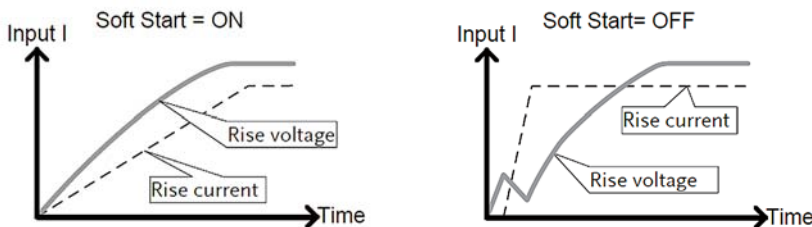


The soft start setting is used to limit the amount of input current at start-up. It can increase test reliability & stability.



Rear Panel

### SEQUENCE FUNCTION

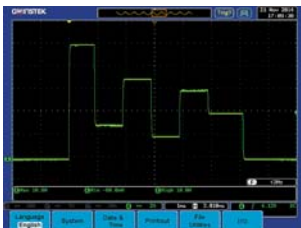

When operating the Sequence Function, PEL-3031E follows the time and load settings of step1, step2, step3, etc. so as to realize different load current variation.



Ramp function of PEL-3000E is able to set the current transition. When turned on, the current takes on a slope form; when turned off, the current takes on a step form.

### APPLICATIONS

- Product's Output Characteristics Assessment For Power Supplies
- Battery Discharge Tests
- Quality Verification And Susceptibility Tests For Electronic Components Such as Power Switch, Relay, Connector, And Fuse, Etc.
- Diode Characteristics Tests Such as LED
- High Voltage Solar Panel And LED Driver

**SPECIFICATIONS**

	Model	PEL-3031E		PEL-3032E	
		Power Range Voltage Current Min. Operating Voltage(dc)	300W Low 1 ~ 150V 0 ~ 6A 1V ~ 6A	300W High 1 ~ 150V 0 ~ 60A 1V ~ 60A	300W Low 2.5 ~ 500V 0 ~ 1.5A 2.5V ~ 1.5A
STATIC MODE	Constant Current Mode Range Setting Range Resolution Accuracy	0 ~ 6A 0 ~ 6.12A 0.2mA (T <sup>±</sup> )±(0.1% of set + 0.1% of F.S)+Vin/500kΩ (Full scale of high range)	0 ~ 60A 0 ~ 61.2A 2mA (T <sup>±</sup> )±(0.1% of set + 0.2% of F.S)+Vin/500kΩ (Full scale of high range)	0 ~ 1.5A 0 ~ 1.53A 0.05mA (T <sup>±</sup> )±(0.1% of set + 0.1% of F.S)+Vin/500kΩ (Full scale of high range)	0 ~ 15A 0 ~ 15.3A 0.5mA (T <sup>±</sup> )±(0.1% of set + 0.2% of F.S)+Vin/500kΩ (Full scale of high range)
	Constant Resistance Mode Range Setting Range Resolution(30000 Steps) Accuracy	60S ~ 0.002S(0.01666Ω ~ 500Ω)(300W/15V) ; 6S ~ 0.0002S(0.1666Ω ~ 5kΩ)(300W/150V) 60S ~ 0.002S(0.01666Ω ~ 500Ω)(300W/15V) ; 6S ~ 0.0002S(0.1666Ω ~ 5kΩ)(300W/150V) 0.002S(15V) ; 0.0002S(500V) (T <sup>±</sup> )±(0.3% of set + 0.6S) + 0.002mS		6S ~ 0.0002S(0.1666Ω ~ 5kΩ)(300W/50V) ; 0.6S ~ 0.00002S(1.6666Ω ~ 50kΩ)(300W/500V) 6S ~ 0.0002S(0.1666Ω ~ 5kΩ)(300W/50V) ; 0.6S ~ 0.00002S(1.6666Ω ~ 50kΩ)(300W/500V) 0.0002S(50V) ; 0.00002S(500V) (T <sup>±</sup> )±(0.3% of set + 0.06S) + 0.002mS	
	Constant Voltage Mode Range Setting Range Resolution Accuracy	1 ~ 15V 0 ~ 15.3V 0.5mV (T <sup>±</sup> )±(0.1% of set + 0.1% of F.S) (Full scale of Low range)	1 ~ 150V 0 ~ 153V 5mV (T <sup>±</sup> )±(0.1% of set + 0.1% of F.S) (Full scale of High range)	2.5 ~ 50V 0 ~ 51V 1mV (T <sup>±</sup> )±(0.1% of set + 0.1% of F.S) (Full scale of Low range)	2.5 ~ 500V 0 ~ 510V 10mV (T <sup>±</sup> )±(0.1% of set + 0.1% of F.S) (Full scale of High range)
	Constant Power Mode Range Setting Range Resolution Accuracy	0W ~ 30W(6A) 0W ~ 30.6W 1mW (T <sup>±</sup> )±(0.6 % of set + 1.4 % of f.s (Full scale of H range)) + VinΛ2/500 kΩ	0W ~ 300W(60A) 0W ~ 306W 10mW	0W ~ 30W(1.5A) 0W ~ 30.6W 1mW	0W ~ 300W(15A) 0W ~ 306W 10mW
DYNAMIC MODE	General T1& T2 Accuracy Slew Rate (Accuracy 10%) Slew Rate Resolution Slew Rate Accuracy of Setting	0.05mS ~ 30mS/Res : 1μS; 30mS ~ 30S/Res : 1mS 1μS/1mS ± 200ppm 0.001 ~ 0.25A/μS 0.001A/μS ±(10% + 15μs) *1 Time to reach from 10 % to 90 % when the current is varied from 2 % to 100 % (20 % to 100 % in L range) of the rated current.		0.05mS ~ 30mS/Res : 1μS; 30mS ~ 30S/Res : 1mS 1μS/1mS ± 200ppm 0.25 ~ 62.5mA/μS 0.25mA/μS 1μS/1mS ± 200ppm 2.5 ~ 625mA/μS 2.5mA/μS	
	Constant Current Mode Current Setting Range Current Resolution Current Accuracy	0 ~ 6A 0 ~ 6.12A 0.2mA ±0.8% F.S.	0 ~ 60A 0 ~ 61.2A 2mA ±0.8% F.S.	0 ~ 1.5A 0 ~ 1.53A 0.05mA ±0.8% F.S.	0 ~ 15A 0 ~ 15.3A 0.5mA ±0.8% F.S.
	Constant Resistance Mode Range Setting Range Resistance Resolution Resistance Accuracy	60S ~ 0.002S(0.01666Ω ~ 500Ω)(300W/15V) 6S ~ 0.0002S(0.1666Ω ~ 5kΩ)(300W/150V) 60S ~ 0.002S(0.01666Ω ~ 500Ω)(300W/15V) 6S ~ 0.0002S(0.1666Ω ~ 5kΩ)(300W/150V) 30000 steps (T <sup>±</sup> )±(1%set + 0.6S) + 0.002mS		6S ~ 0.0002S(0.1666Ω ~ 5kΩ)(300W/50V) 0.6S ~ 0.00002S(1.6666Ω ~ 50kΩ)(300W/500V) 6S ~ 0.0002S(0.1666Ω ~ 5kΩ)(300W/50V) 0.6S ~ 0.00002S(1.6666Ω ~ 50kΩ)(300W/500V) 30000 steps (T <sup>±</sup> )±(1%set + 0.06S) + 0.002mS	
	MEASUREMENT	Voltage Readback Range Resolution Accuracy	0 ~ 15V 0.5mV (T <sup>±</sup> )±(0.1% of rdg+0.1% of F.S) (Full scale of Low range)	0 ~ 150V 5mV (T <sup>±</sup> )±(0.1% of rdg+0.1% of F.S) (Full scale of High range)	0 ~ 50V 2mV (T <sup>±</sup> )±(0.1% of rdg+0.1% of F.S) (Full scale of Low range)
	Current Readback Range Resolution Accuracy	0 ~ 6A 0.2mA (T <sup>±</sup> )±(0.1% of rdg+0.1% of F.S) (Full scale of High range)	0 ~ 60A 2mA (T <sup>±</sup> )±(0.1% of rdg+0.2% of F.S) (Full scale of High range)	0 ~ 1.5A 0.05mA (T <sup>±</sup> )±(0.1% of rdg+0.1% of F.S) (Full scale of High range)	0 ~ 15A 0.5mA (T <sup>±</sup> )±(0.1% of rdg+0.2% of F.S) (Full scale of High range)
GENERAL	Trigger In/out Terminal(BNC) Current Monitor Output Analog External Control Soft Start Sequence(Normal/Fast) BATT Test Automation OCP Autotest Function OPP Autotest Function Preset Data Protection	YES YES YES YES YES YES YES YES 10 Sets OCP, OPP, UVP, OVP, OTP, RVP			
OTHER	Power Source Interface Dimensions & Weight	100 ~ 120VAC/ 200 ~ 240VAC, 47 ~ 63Hz USB, GPIB(Optional), Analog control 213.8(W) x 124.0(H) x 400.5(D)mm, Approx. 7.5Kg			

Note : \*1 - If the ambient temperature is over 30 °C or below 20 °C, then T = ± |t - 25 °C| x 100ppm/°C x Set  
If the ambient temperature is in the range of 20°C~30°C, then T = 0 (t is the ambient temperature)

Specifications subject to change without notice. EL-3000EGD1DH

ORDERING INFORMATION	
PEL-3031E	150V/60A/300W Programmable Single-channel D.C. Electronic Load
PEL-3032E	500V/15A/300W Programmable Single-channel D.C. Electronic Load
ACCESSORIES	
Quick Start Guide, CD ROM (User Manual, Programming Manual)x1, Power Cord(Region dependent), Front Terminal Washers-spring Washer(M6)x2, GTL-105A Remote Sense Cables, Red x 1, Black x 1	

OPTIONAL ASSESSORIES	
GTL-248	GPIB cable, 2.0m
GTL-246	USB cable, Type A – Type B
PEL-010	Dust Filter
PEL-004	GPIB option

