


M83 Datamate Connectors

Datamate **3-Row**

Female Crimp

- Part numbers are for a kit of housing and contacts.
- Spare contacts are available.
- Low-force 4-finger Beryllium Copper contact clip.
- Fully shrouded contacts, rear-insertable.
- Crimp instruction sheets & video available online at www.harwin.com.
- Mates with male connectors shown on pages 69 and 70.

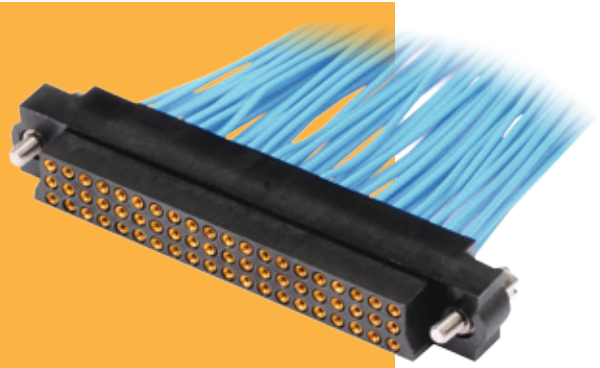

DATAMATE J-TEK

FEMALE CRIMP	CALCULATION	SPARE CONTACTS												
	<table border="1"> <tr> <td>A</td> <td>B + 15</td> </tr> <tr> <td>B</td> <td>(Total no. of contacts - 3) x 2/3</td> </tr> <tr> <td>C</td> <td>B + 9</td> </tr> </table>	A	B + 15	B	(Total no. of contacts - 3) x 2/3	C	B + 9	<table border="1"> <thead> <tr> <th style="background-color: #f4a460;">WIRE SIZE</th> <th style="background-color: #f4a460;">PART NUMBER</th> </tr> </thead> <tbody> <tr> <td>22 AWG</td> <td>M83-0110005</td> </tr> <tr> <td>24-28 AWG</td> <td>M83-0130005</td> </tr> </tbody> </table>	WIRE SIZE	PART NUMBER	22 AWG	M83-0110005	24-28 AWG	M83-0130005
	A	B + 15												
	B	(Total no. of contacts - 3) x 2/3												
C	B + 9													
WIRE SIZE	PART NUMBER													
22 AWG	M83-0110005													
24-28 AWG	M83-0130005													
	<table border="1"> <thead> <tr> <th style="background-color: #f4a460;">TOOLS</th> </tr> </thead> <tbody> <tr> <td> Recommended Crimp Tool - M22520/2-01 Positioner - T5747 Contact Insertion/Removal Tool - Z80-280 See pages 87 to 89 Instruction sheets available at www.harwin.com/downloads/instructions </td> </tr> </tbody> </table>	TOOLS	Recommended Crimp Tool - M22520/2-01 Positioner - T5747 Contact Insertion/Removal Tool - Z80-280 See pages 87 to 89 Instruction sheets available at www.harwin.com/downloads/instructions											
TOOLS														
Recommended Crimp Tool - M22520/2-01 Positioner - T5747 Contact Insertion/Removal Tool - Z80-280 See pages 87 to 89 Instruction sheets available at www.harwin.com/downloads/instructions														
	<table border="1"> <thead> <tr> <th style="background-color: #f4a460;">WIRE STRIPPING DETAILS</th> </tr> </thead> <tbody> <tr> <td> </td> </tr> </tbody> </table>	WIRE STRIPPING DETAILS												
WIRE STRIPPING DETAILS														
HOW TO ORDER														
M83 - LF X1 F2 N XX - 0000 - 000														
<table border="1"> <thead> <tr> <th colspan="2" style="background-color: #f4a460;">SERIES CODE</th> </tr> </thead> <tbody> <tr> <td>C1</td> <td>Small Bore (24-28 AWG)</td> </tr> <tr> <td>D1</td> <td>Large Bore (22 AWG)</td> </tr> </tbody> </table>	SERIES CODE		C1	Small Bore (24-28 AWG)	D1	Large Bore (22 AWG)	<table border="1"> <thead> <tr> <th colspan="2" style="background-color: #f4a460;">TOTAL NO. OF CONTACTS</th> </tr> </thead> <tbody> <tr> <td colspan="2" style="text-align: center;">18, 27, 36, 54, 60, 96</td> </tr> </tbody> </table>	TOTAL NO. OF CONTACTS		18, 27, 36, 54, 60, 96				
SERIES CODE														
C1	Small Bore (24-28 AWG)													
D1	Large Bore (22 AWG)													
TOTAL NO. OF CONTACTS														
18, 27, 36, 54, 60, 96														
<table border="1"> <thead> <tr> <th colspan="2" style="background-color: #f4a460;">CRIMPS</th> </tr> </thead> <tbody> <tr> <td>C1</td> <td>Small Bore (24-28 AWG)</td> </tr> <tr> <td>D1</td> <td>Large Bore (22 AWG)</td> </tr> </tbody> </table>	CRIMPS		C1	Small Bore (24-28 AWG)	D1	Large Bore (22 AWG)	<table border="1"> <thead> <tr> <th colspan="2" style="background-color: #f4a460;">JACKSCREW</th> </tr> </thead> <tbody> <tr> <td>F2</td> <td>Hex Socket Jackscrew</td> </tr> </tbody> </table>	JACKSCREW		F2	Hex Socket Jackscrew			
CRIMPS														
C1	Small Bore (24-28 AWG)													
D1	Large Bore (22 AWG)													
JACKSCREW														
F2	Hex Socket Jackscrew													

All dimensions in mm.