

# FieldFox Handheld Analyzers

4/6.5/9/14/18/26.5 GHz

This configuration guide describes configurations, options and accessories for the FieldFox family of portable analyzers. This guide should be used in conjunction with the technical overview and data sheet for a complete description of the analyzers. The table on Page 3 titled “FieldFox Family and Options” shows a comparison of the functions available in the FieldFox family of analyzers.

Note: Combination analyzer (combo) = Cable and antenna tester (CAT) + Vector network analyzer (VNA) + Spectrum analyzer (SA)



## Included Accessories

The following accessories are included with every FieldFox:

- AC/DC adapter
- Battery
- Soft carrying case
- LAN cable
- Quick Reference Guide



## Table of Contents

FieldFox Family and Options .....	3
FieldFox RF and Microwave (Combination) Analyzers .....	4
FieldFox RF and Microwave (Combination) Analyzer FAQs .....	6
ERTA System Typical Configuration.....	9
FAQs – Applicable To All FieldFox RF and Microwave Analyzers .....	10
FieldFox Signal Analyzers.....	12
FieldFox Spectrum Analyzer FAQs.....	13
Upgrades.....	14
Documentation .....	16
Calibration Kits .....	16
Accessories.....	18

## FieldFox Family and Options

Option	Description	Combination Analyzers N9913/4/5/6/7/8B	Spectrum Analyzers N9933/4/5/6/7/8B
<b>CAT / vector network analysis</b>			
010	VNA time domain	✓	—
210	VNA transmission/reflection	✓	—
211	VNA full 2-port S-parameters	✓	—
212	1-port mixed-mode S-parameters	✓	—
215	TDR cable measurements	✓	—
305	Cable and antenna analyzer	Base model <sup>1</sup>	— <sup>2</sup>
308	Vector voltmeter	✓	—
320	Reflection meas. (RL, VSWR and scalar meas.)	— <sup>3</sup>	✓
<b>Spectrum analysis</b>			
209	Extended range transmission analysis (ERTA)	✓	✓
220	Tracking generator	— <sup>4</sup>	✓
233	Spectrum analyzer	✓	Base model <sup>1</sup>
235	Pre-amplifier	✓	✓
236	Interference analyzer and spectrogram	✓	✓
238	Spectrum analyzer time gating	✓	✓
312	Channel scanner	✓	✓
350	Real-time spectrum analyzer (RTSA)	✓	✓
351	I/Q analyzer (IQA)	✓	✓
355	Analog demodulation	✓	✓
356	Noise figure (NF)	✓	✓
370	Over-the-Air (OTA) LTE FDD	✓	✓
377	Over-the-Air (OTA) 5GTF	✓	✓
B04	Analysis bandwidth, 40 MHz <sup>5</sup>	✓	✓
B10	Analysis bandwidth, 100 MHz <sup>5</sup>	✓	✓
<b>Power measurements</b>			
208	USB power sensor meas. versus frequency	✓	✓
302	USB power sensor support	✓	✓
310	Built-in power meter	✓	✓
330	Pulse meas. with USB peak power sensor	✓	✓
<b>System features</b>			
030	Remote control capability	✓	✓
307	GPS receiver	✓	✓
309	DC bias variable-voltage source	✓	✓
<b>Windows based software</b>			
89601B	89600 VSA software	✓	✓

<sup>1</sup> Base model means that the functionality listed is the primary function of that instrument. For example, on the N991xB combo analyzers, cable and antenna analysis is the standard function included with every N991xB.

<sup>2</sup> Option 305 is not available on the N993xB. A subset of cable and antenna analyzer measurements, return loss and VSWR, is available as Option 320.

<sup>3</sup> Option 320 is not applicable to N991xB. The reflection measurements of return loss and VSWR are included with every N991xB. So, there is no need for an Option 320 on these analyzers.

<sup>4</sup> On the N991xB analyzers, order Options 233 and 210 to obtain a tracking generator with the spectrum analyzer. There is no Option 220 on the N991xB analyzers. Option 233 provides the spectrum analyzer capability and Option 210 the “tracking” capability.

<sup>5</sup> 10 MHz standard.

## FieldFox RF and Microwave (Combination) Analyzers

### Analyzer models

Step 1. Select the model that provides the desired frequency range.

Model	Description	CAT and VNA frequency	SA frequency <sup>1</sup>	Test port connectors
N9913B	4 GHz FieldFox RF analyzer	30 kHz to 4 GHz	9 kHz to 4 GHz	Type-N (f)
N9914B	6.5 GHz FieldFox RF analyzer	30 kHz to 6.5 GHz	9 kHz to 6.5 GHz	Type-N (f)
N9915B	9 GHz FieldFox microwave analyzer	30 kHz to 9 GHz	9 kHz to 9 GHz	Type-N (f)
N9916B	14 GHz FieldFox microwave analyzer	30 kHz to 14 GHz	9 kHz to 14 GHz	Type-N (f)
N9917B	18 GHz FieldFox microwave analyzer	30 kHz to 18 GHz	9 kHz to 18 GHz	Type-N (f)
N9918B	26.5 GHz FieldFox microwave analyzer	30 kHz to 26.5 GHz	9 kHz to 26.5 GHz	3.5 mm (m)

---

<sup>1</sup> Useable to 5 kHz.

## Analyzer options

Step 2. Select optional measurement capabilities.

Any of these options can easily be added as a software upgrade in the future.

Option	Description	Prerequisite options/notes
<b>CAT / vector network analysis</b>		
010	VNA time domain	Requires 210, recommend 211. See page 6, FAQ #7
210	VNA transmission/reflection	Recommend ordering a cal kit. See page 6, FAQ #4 and #6
211	VNA full 2-port S-parameters	Requires 210, recommend ordering a cal kit. See page 6, FAQ #5
212	1-port mixed-mode S-parameters	Requires 210 and 211
215	TDR cable measurements	—
308	Vector voltmeter	210 and 211 required to obtain full VVM functionality. See page 7, FAQ #8
<b>Spectrum analysis</b>		
209	Extended range transmission analysis (ERTA)	Requires 233 and 210. Recommend 307. Requires two FieldFox units. See page 7, FAQ #9. See page 9 for typical configuration.
233	Spectrum analyzer	—
235	Pre-amplifier	Requires 233
236	Interference analyzer and spectrogram	Requires 233
238	Spectrum analyzer time gating	Requires 233
312	Channel scanner	Requires 233
350	Real-time spectrum analyzer (RTSA)	Requires 233, Recommend 235. See page 8, FAQ #11
351	I/Q Analyzer (IQA)	Requires 233
355	Analog demodulation	Requires 233
356	Noise Figure (NF)	Requires 233, 235, 309 and accessory item N9910X-713 BNC to SMB cable. See page 8, FAQ #13 for external preamplifier and noise source requirements.
370	Over-the-Air (OTA) LTE FDD	Requires 233, 307. Recommend 235.
377	Over-the-Air (OTA) 5GTF	Requires 233, 307. Recommend 235.
B04	Analysis bandwidth, 40 MHz <sup>1</sup>	Requires 233. Recommend 350, 351 or 89600 VSA software.
B10	Analysis bandwidth, 100 MHz <sup>1</sup>	Requires 233. Recommend 350, 351 or 89600 VSA software.
<b>Power measurements</b>		
208	USB power sensor meas. versus frequency	Requires 302. See page 11, FAQ #9
302	USB power sensor support	Need to order USB power sensor <sup>2</sup> . See page 10, FAQ #1
310	Built-in power meter	No power sensor required. See page 10, FAQ #2
330	Pulse meas. with USB peak power sensor	Need to order USB peak power sensor. See page 11, FAQs #7 and #8
<b>System features</b>		
030	Remote control capability	Requires an iOS device
307	GPS receiver	Need to order GPS antenna, N9910X-825. See page 11, FAQ #3
309	DC bias variable-voltage source	Recommend N9910X-713 cable, see page 11, FAQ #4
<b>Windows based software</b>		
89601B	89600 VSA Software	Requires 233

<sup>1</sup> 10 MHz standard.

<sup>2</sup> List of compatible sensors available from [www.keysight.com/find/fieldfoxsupport](http://www.keysight.com/find/fieldfoxsupport)

## FieldFox RF and Microwave (Combination) Analyzer FAQs

Question	Answer
1. What is included with a base N991xB analyzer?	The base model includes the cable and antenna analyzer
	Measurements: DTF (dB, linear, VSWR), return loss and DTF, return loss (dB), and 1-port cable loss
	Calibrations: CalReady, OSL, and response cal
	Note: 2-port insertion loss is NOT included with the base model, if 2-port insertion loss is needed, order Option 210
	Note: There is no phase information with the base analyzer, to obtain S11 or S21 phase, order Option 210
2. What is included with N991xB Option 233?	Basic spectrum analysis, four traces, different detector types, radio standard selection, limit lines
	Channel power, occupied bandwidth, adjacent channel power
	AM/FM tune and listen, field strength measurements, antenna factors, frequency counter marker
	Tracking generator (TG)/Independent source: <ul style="list-style-type: none"> <li>- TG CW mode (source CW frequency can be set independent of SA frequency) - included</li> <li>- TG CW coupled mode (source CW frequency is auto coupled to SA's center frequency) - included</li> <li>- TG tracking mode (traditional TG operation, swept SA coupled to swept source) - (requires Option 210)</li> </ul>
3. What is included with N991xB Option 236?	Interference analyzer and spectrogram
	Trace playback and recording
4. What is included with N991xB Option 210?	Option 210 adds a VNA with transmission/reflection (T/R) capability
	Measurements: S21, S11, magnitude and phase
	Additionally, in the CAT mode, you can measure 2-port insertion loss
	Calibrations: CalReady, OSL, response, and enhanced response cal
	If you need all four S-parameters, order Options 210 and 211
	If you need 2-port cal, order Options 210 and 211
	Adds tracking mode to the tracking generator/independent source included with Option 233, spectrum analyzer
5. What is included with N991xB Option 211?	Option 211 adds full 2-port S-parameter capability to the VNA mode
	Measurements: All four S-parameters (S11, S21, S22, S12), magnitude and phase
	Calibrations: CalReady, OSL, response, enhanced response, and full 2-port cal
6. Can I measure group delay on N991xB analyzers?	If you have phase measurement capability, then you can measure group delay. Option 210 is required for any phase measurement capability. So, if you do not have Option 210, you cannot measure group delay.
7. What is included with N991xB Option 010?	S11/S21 in time domain, if Option 210 is ordered. To get time domain data for all four S-parameters and full 2-port cal, order Option 211.
	View both time and frequency domain data at the same time
	Low-pass, impulse, and band-pass modes
	Minimum, medium, and maximum window
	Gating

Question	Answer
8. What is included with N991xB Option 308?	With Option 308: 1-port cable trimming
	With Options 308 and 210: 1-port cable trimming, 2-port transmission
	With Options 308, 210, and 211: 1-port cable trimming, 2-port transmission, A/B and B/A
	Note: A/B and B/A measurements require an external source
9. What are the requirements for Option 209?	Extended Range Transmission Analysis (ERTA) or Option 209 is a scalar measurement system based on the use of two (2) FieldFox units. One FieldFox acts as the <i>source</i> and reference receiver, while the second FieldFox acts as the <i>measurement</i> receiver. When different frequency models are used in an ERTA pair, the ERTA system frequency range is limited to the lowest of the pair.
	<b>Required hardware</b>
	A. Two (2) FieldFox units. FieldFox units can be any of these models: <ul style="list-style-type: none"> <li>- FieldFox microwave combination analyzers: N9913B, N9914B, N9915B, N9916B, N9917B, N9918B</li> <li>- FieldFox microwave spectrum analyzers: N9933B, N9934B, N9935B, N9936B, N9937B, N9938B</li> </ul>
	The two FieldFox units used in ERTA do not have to be the same model.
	<ul style="list-style-type: none"> <li>- ERTA requires the following options on Combo FieldFox models (N9913B, N9914B, N9915B, N9916B, N9917B, N9918B):</li> <li>- Option 210, VNA transmission/reflection</li> <li>- Option 233, spectrum analyzer</li> </ul>
	ERTA requires the following options on SA FieldFox models (N9933B, N9934B, N9935B, N9936B, N9937B, N9938B) <ul style="list-style-type: none"> <li>- Option 220, tracking generator</li> </ul>
	Both FieldFox units (the one used as the source, and the other used as the receiver) must have the options listed above. The ERTA option (209) cannot be installed unless 210 and 233 are present on a combo analyzer; or 220 is present on a SA analyzer.
	With either the Combo or SA FieldFox units, the following options are highly recommended: <ul style="list-style-type: none"> <li>- Option 235, preamplifier – this option increases the measurement dynamic range by increasing the received signal power</li> <li>- Option 307, GPS receiver – this option increases the dynamic range by increasing the frequency accuracy and permitting the use of a narrower RBW</li> </ul>
	B. Power splitter, two-resistor model, Keysight 11667A, 11667B, or 11667C. Other power splitters can be used but the specifications listed are based on the match and tracking performance of 11667A, 11667B, or 11667C. Three-resistor power splitters are not recommended.
	C. N9910X-712, Trigger/Reference-in cable, SMA (m) to BNC(f), 1 m, quantity two
	D. N9910X-713, Trigger/Reference-out cable, SMB (m) to BNC (m), 1 m, quantity two
	E. LAN connection – For ERTA, the two FieldFox units communicate via a LAN connection. For a direct connection, a LAN cable is required. Alternately, both analyzers can be on a local area network.
	<b>Recommended accessory</b>
F. N9910X-825, GPS Antenna	
10. What is included with Option 355?	FieldFox analog demodulation has two parts: (1) Tune and listen, and (2) AM/FM metrics. Tune and listen is available with the purchase of the spectrum analyzer option 233. AM/FM metrics becomes available when Option 355 is purchased. AM/FM metrics provides the user with RF spectrum view, demodulated baseband signal waveform, carrier power, frequency deviation, SINAD and more.



Question	Answer												
11. What is included with Option 350?	Real-time spectrum analyzer (RTSA) or Option 350 provides real-time measurements on a FieldFox. The FieldFox must be equipped with spectrum analysis capability. The preamplifier option is recommended, as elusive signals often have low power levels. The maximum real-time bandwidth for option 350 is 10 MHz (standard), 40 MHz (Option B04), or 100 MHz (Option B10). RTSA includes trace recording and playback capabilities. It does not include a frequency-mask trigger (FMT).												
12. Is Spectrum Analyzer Trace Recording and Playback standard or an option?	<p>Spectrum Analyzer mode (Option 233) does not include Trace Recording and Playback by default. To obtain this capability in SA mode, Option 236 Interference Analyzer and Spectrogram needs to be purchased.</p> <p>RTSA mode (Option 350) does include Trace Recording and Playback by default in RTSA mode.</p> <p>Purchasing RTSA mode (Option 350) does not enable Trace Recording and Playback in SA mode (Option 233).</p> <table border="1" data-bbox="574 642 1455 852"> <thead> <tr> <th data-bbox="574 642 1016 737">Trace record/playback features</th> <th data-bbox="1016 642 1300 737">SA mode SA &amp; Interference Analyzer Options 233 and 236</th> <th data-bbox="1300 642 1455 737">RTSA mode RTSA Option 350</th> </tr> </thead> <tbody> <tr> <td data-bbox="574 737 1016 774">Record and playback spectrum traces</td> <td data-bbox="1016 737 1300 774">Yes</td> <td data-bbox="1300 737 1455 774">Yes</td> </tr> <tr> <td data-bbox="574 774 1016 812">Save trace data with GPS time stamp over time</td> <td data-bbox="1016 774 1300 812">Yes</td> <td data-bbox="1300 774 1455 812">Yes</td> </tr> <tr> <td data-bbox="574 812 1016 852">Record and playback spectrogram data</td> <td data-bbox="1016 812 1300 852">Yes</td> <td data-bbox="1300 812 1455 852">No<sup>1</sup></td> </tr> </tbody> </table>	Trace record/playback features	SA mode SA & Interference Analyzer Options 233 and 236	RTSA mode RTSA Option 350	Record and playback spectrum traces	Yes	Yes	Save trace data with GPS time stamp over time	Yes	Yes	Record and playback spectrogram data	Yes	No <sup>1</sup>
Trace record/playback features	SA mode SA & Interference Analyzer Options 233 and 236	RTSA mode RTSA Option 350											
Record and playback spectrum traces	Yes	Yes											
Save trace data with GPS time stamp over time	Yes	Yes											
Record and playback spectrogram data	Yes	No <sup>1</sup>											
13. What are the requirements for Noise figure (NF) Option 356?	Requires spectrum analyzer mode (Option 233 on combination models), internal preamplifier (Option 235) and DC bias variable voltage source (Option 309). An external noise source is also required and FieldFox supports Keysight noise source models 346A/B/C/K40/K01. Also recommended to improve accuracy is an external preamplifier Keysight models U7227A/C/F or U7228A/C/F. Requires accessory item N9910X-713 BNC to SMB cable for DC bias variable voltage source to noise source connection.												

<sup>1</sup> RTSA trace recordings can be recalled and played back in SA mode Spectrogram. This has the added benefit that the measurements are shown 'slower', making it easier for the human eye to decipher the signal content.



## ERTA System Typical Configuration

Item	Description/Options	Quantity
FieldFox	Combo analyzer: Required Options 210, 233. Recommended: 235, 307 SA analyzer: Required: Option 220. Recommended: 235, 307	2
Power splitter	11667A (Type-N) or 11667B (3.5 mm)	1
Type-N(m) to Type-N(m) adapter	N9910X-850 (for use with 11667A or Type-N systems)	1
Trigger cables <sup>1</sup>	N9910X-712, SMA(m) to BNC(f) N9910X-713, SMB(m) to BNC(m)	2 of each Total of 4 cables
RF test cable	Connecting FieldFox source port 1 to power splitter input	1
RF test cable or adapter	Connecting power splitter output arm to FieldFox port 2	1
RF jumper cable or adapter	Power splitter output arm to DUT input	1
RF jumper cable or adapter	DUT output to FieldFox receiver port 2	1
LAN cable	LAN cable to connect two FieldFox units directly, or the analyzers must be on the LAN	1
N9910X-825	GPS antenna, recommended. Necessary if Option 307 is ordered.	2

<sup>1</sup> The trigger cables and LAN cables must be at least as long as the separation distance between the two ends of the DUT.



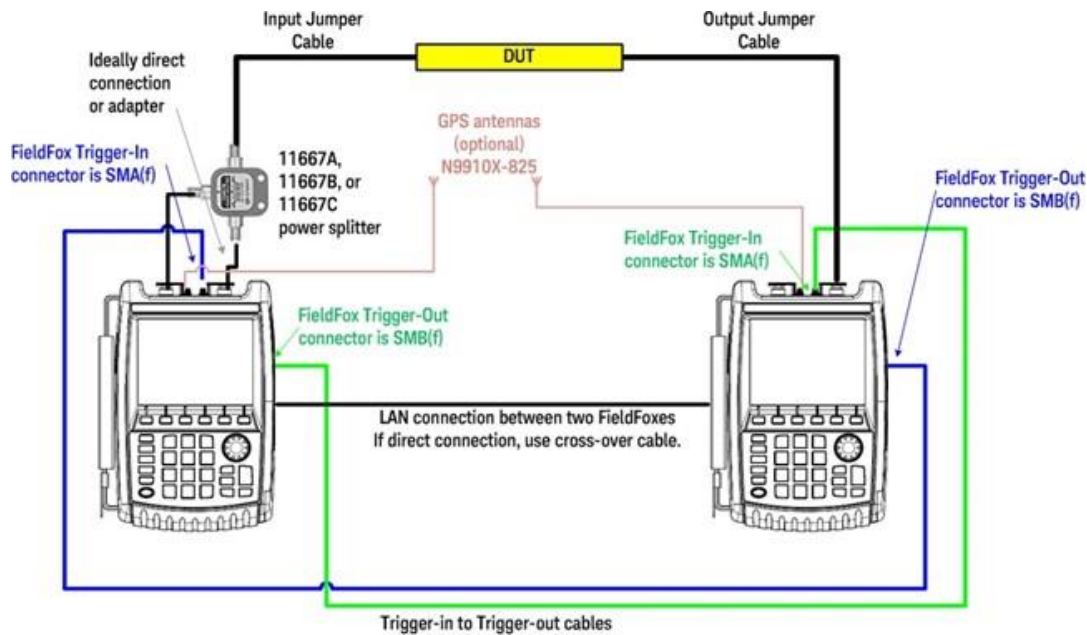


Figure 1 - ERTA system diagram

<sup>1</sup> The trigger cables and LAN cables must be at least as long as the separation distance between the two ends of the DUT.

## FAQs – Applicable To All FieldFox RF and Microwave Analyzers

Question	Answer		
1. What USB power sensors work with Option 302?	All Keysight U2000x Series USB power sensors are supported with FieldFox. Visit: <a href="http://www.keysight.com/find/fieldfoxsupport">www.keysight.com/find/fieldfoxsupport</a> for an up-to-date listing.		
2. What is the difference between USB power sensor (Option 302) and built-in power meter (Option 310)?	<b>Option 302 USB power sensor</b>	<b>Option 310 Built-in power meter (or channel power meter)</b>	
	Description	Option 302 allows users to connect a USB power sensor to FieldFox's USB port and make broadband power measurements	Option 310 is a channelized power measurement capability built into FieldFox analyzers. Maximum bandwidth is 100 MHz.
	External hardware	USB power sensor required	None. Uses internal receiver.
	Power measurement	Broadband diode detector measures all frequencies	Tuned receiver, so measures frequencies within defined channel bandwidth
	Frequency range	Depends on USB sensor	Frequency range of the analyzer
	Settings	Set CW frequency	Set CW frequency, set channel width/span
	Power range	Depends on USB sensor	Depends on channel width and attenuator setting
	Warm-up time	30 minutes to meet accuracy specifications	No warm-up time required
	Accuracy	Depends on USB sensor	InstAlign accuracy: $\pm 0.5$ dB typical for a CW signal. Since the measurement is within a certain frequency channel or bandwidth, to make an accurate measurement, the user needs to know the exact center frequency and the signal's bandwidth and set those accurately.
	Programmable	Yes, via SCPI	Yes, via SCPI
Physical connection	The power sensor can easily be moved to the measurement point, with a USB cable connecting the detector to FieldFox.	The measurement point needs to be connected to FieldFox's RF input port. If an RF jumper cable is used, the user needs to account for the loss of the cable with an offset value (can be entered into the analyzer).	
FieldFox source control	Yes, on/off, and nominal power level control	No access to FieldFox's source from the built-in power meter mode	

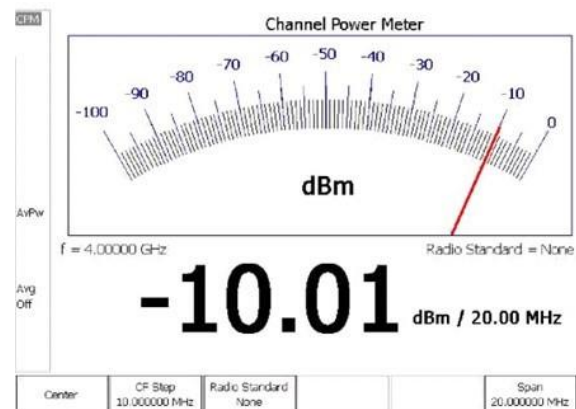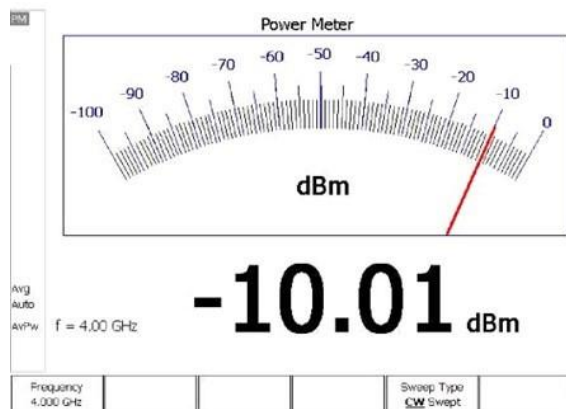

Question	Answer
3. What do I need to get GPS information?	<ol style="list-style-type: none"> <li>The recommended GPS solution is to order: <ul style="list-style-type: none"> <li>Option 307 - built-in GPS receiver</li> <li>A GPS antenna such as N9910X-825</li> <li>Other GPS antennas can also be used</li> <li>The GPS connector on the instrument is SMA (f)</li> </ul> </li> <li>Alternatively, you can purchase a USB-based GPS receiver. You do not need to purchase any FieldFox options for the USB-based GPS to work. However, the USB-based GPS only provides time and location data, and time synchronization capability. It cannot be used to increase the frequency accuracy of the instrument.</li> </ol>
4. What is the connector for Option 309, DC output?	The DC output has a SMB (m) connector. Recommend ordering N9910X Option 713 bias-tee power cable SMB (f) to BNC (m).
5. What are the connectors for the Reference/Trigger In and Reference/ Trigger Out?	<p>The connector for the Ref/Trig In is SMA (f). Recommend ordering N9910X Option 712 Trig/Ref in SMA (m) to BNC (f) cable.</p> <p>The connector for the Ref/Trig Out is SMB (m). Recommend ordering N9910X Option 713 bias-tee power cable SMB (f) to BNC (m).</p>
6. What is Option 030 remote control capability?	<ol style="list-style-type: none"> <li>Option 030 provides a license for FieldFox to allow remote control via an iOS device.</li> <li>Not supplied by user, but necessary for operation of Option 030 are: <ul style="list-style-type: none"> <li>iOS device: iPad, iPhone, or iPod Touch with iOS 6.1 or higher with free FieldFox app</li> <li>A WiFi or 3G/4G network connection between FieldFox and iOS device</li> </ul> </li> </ol>
7. What USB sensor is required for Option 330?	Option 330 or pulse measurements requires a Keysight USB peak power sensor. Visit <a href="http://www.keysight.com/find/usbsensorsforfieldfox">www.keysight.com/find/usbsensorsforfieldfox</a> for a list of supported peak power sensors. Average power sensors cannot be used with Option 330, only peak power sensors. The peak power sensor needs to be purchased separately.
8. What measurement capabilities are included with Option 330?	<p>Average power, peak power, and peak to average ratio</p> <p>Analog gauge display and digital display, dBm and watts</p> <p>Relative/absolute measurements, dB or %, minimum and maximum limits</p> <p>Trace graph for pulse profiling with gating</p> <p>Rise time, fall time, pulse width, pulse period, pulse repetition frequency</p>
9. What is included with Option 208?	Option 302, USB power sensor measurements, includes <b>CW</b> power measurements (one frequency at a time). With Option 208 added, you can make <b>swept-frequency</b> power measurements. You can plot source power, gain, and receive power versus frequency. Additionally, the source frequency can be offset from the receiver frequency. The power sensor needs to be purchased separately.

## FieldFox Signal Analyzers

### Analyzer models

Step 1. Select the model that provides the desired frequency range.

Model	Description	Frequency range <sup>1</sup>	Test port connectors
N9933B	4 GHz FieldFox signal analyzer	9 kHz to 9 GHz	Type-N (f)
N9934B	6.5 GHz FieldFox signal analyzer	9 kHz to 9 GHz	Type-N (f)
N9935B	9 GHz FieldFox signal analyzer	9 kHz to 9 GHz	Type-N (f)
N9936B	14 GHz FieldFox signal analyzer	9 kHz to 14 GHz	Type-N (f)
N9937B	18 GHz FieldFox signal analyzer	9 kHz to 18 GHz	Type-N (f)
N9938B	26.5 GHz FieldFox signal analyzer	9 kHz to 26.5 GHz	Type-N (f) <sup>2</sup>

### Analyzer options

Step 2. Select optional measurement capabilities.

Any of these options can easily be added as a software upgrade in the future.

Option	Description	Prerequisite options/notes
<b>Spectrum analysis</b>		
100 <sup>2</sup>	3.5 mm (m) connectors	Only available on N9938B. Option 100 is only available at time of purchase. It is not available as an upgrade.
209	Extended range transmission analysis (ERTA)	Requires 220. Recommend 307. Requires two FieldFox units. See page 7, FAQ # 9. See page 9 for typical configuration.
220	Full-band tracking generator	CW, CW coupled, and tracking
235	Pre-amplifier	—
236	Interference analyzer and spectrogram	—
238	Spectrum analyzer time gating	—
312	Channel scanner	—
320	Reflection measurements (Return Loss, VSWR and Scalar)	320 requires 220 on all models. On N9938B specifically, 320 also requires 100.
350	Real-time spectrum analyzer (RTSA)	Recommend 235. See page 8, FAQ # 11
351	I/Q Analyzer (IQA)	—
355	Analog demodulation	—
356	Noise Figure (NF)	Requires 235, 309 and accessory item N9910X-713 BNC to SMB cable. See page 8, FAQ #13 for external preamplifier and noise source requirements.
370	Over-the-Air (OTA) LTE FDD	Requires 307, recommend 235.
377	Over-the-Air (OTA) 5GTF	Requires 307, recommend 235.
B04	Analysis bandwidth, 40 MHz <sup>3</sup>	Recommend 350, 351 or 89600 VSA software.
B10	Analysis bandwidth, 100 MHz <sup>3</sup>	Recommend 350, 351 or 89600 VSA software.

<sup>1</sup> Useable to 5 kHz.

<sup>2</sup> Order Option 100 for 3.5 mm (m) test port connectors. With N9938B-100, the spectrum analyzer is built with 3.5 mm test port connectors instead of the standard Type-N (f). Option 100 is a prerequisite for Option 320 for N9938B.

<sup>3</sup> 10 MHz standard.

Power measurements		
208	USB power sensor meas. versus frequency	Requires 302. See page 11, FAQ #9
302	USB power sensor support	Need to order USB power sensor <sup>1</sup> . See page 10, FAQ #1
310	Built-in power meter	No power sensor required. See page 10, FAQ #2
330	Pulse meas. with USB peak power sensor	Need to order USB peak power sensor. See page 11, FAQs #7 and #8
320	Reflection measurements (Return Loss, VSWR and Scalar)	320 requires 220 on all models. On N9938B specifically, 320 also requires 100.
System features		
030	Remote control capability	Requires an iOS device
307	GPS receiver	Need to order GPS antenna, N9910X-825. See page 11, FAQ #3
309	DC bias variable-voltage source	Recommend N9910X-713 cable, see page 11, FAQ #4
Windows based software		
89601B	89600 VSA Software	—

## FieldFox Spectrum Analyzer FAQs

Question	Answer
1. What is included with the basic spectrum analyzer?	Basic spectrum analysis, four traces, different detector types, radio standard selection, limit lines
	Channel power, occupied bandwidth, adjacent channel power
	AM/FM tune and listen, field strength measurements, antenna factors, frequency counter marker
2. What is included with Option 236?	Interference analyzer and spectrogram
	Trace playback and recording
3. What is included with Option 320?	Return loss and VSWR
	Normalization using data/memory
4. What is the difference between Option 320 and the CAT mode on the combo base model?	Option 320 on the N993xB SA offers RL and VSWR. CAT mode on the N991xB combo analyzers offer RL and VSWR, DTF, insertion loss, and also various calibration capabilities such as OSL.
5. What is included with Option 355?	FieldFox analog demodulation has two parts: (1) Tune and listen, and (2) AM/FM metrics. Tune and listen are available as a standard feature on all N993xB FieldFox spectrum analyzers. AM/FM metrics becomes available when Option 355 is purchased. AM/FM metrics provides the user with RF spectrum view, demodulated baseband signal waveform, carrier power, frequency deviation, SINAD and more.
<b>Additional FAQs on pages 10 and 11.</b>	<b>FAQs on pages 10 and 11 apply to all microwave FieldFox models.</b>

<sup>1</sup> List of compatible sensors available from [www.keysight.com/find/fieldfoxsupport](http://www.keysight.com/find/fieldfoxsupport)

## Upgrades

Information on upgrades is available from: [www.keysight.com/find/fieldfoxsupport](http://www.keysight.com/find/fieldfoxsupport)

### FieldFox RF and Microwave (combination) Analyzer Upgrades N9913BU, N9914BU, N9915BU, N9916BU, N9917BU, N9918BU

You Can Upgrade!

Options can be added after your initial purchase.



Option	Description	Upgrade contents	Additional requirements
010	VNA time domain analysis	License key	210, recommend 211
030	Remote control capability	License key	Requires an iOS device
208	USB power sensor measurements versus frequency	License key	302
209	Extended range transmission analysis (ERTA)	License key	233 and 210 <sup>1</sup> , recommend 307
210	VNA transmission and reflection	License key	None
211	VNA full 2-port S-parameters	License key	210
212	Mixed-mode S-parameters	License key	210 and 211
215	TDR cable measurements	License key	None
233	Spectrum analyzer	License key	None
235	Preamplifier	License key	233
236	Interference analyzer and spectrogram	License key	233
238	Spectrum analyzer time gating	License key	233
302	External USB power sensor support	License key	None
307	GPS receiver	License key	None
308	Vector voltmeter	License key	210 and 211 for full VVM functionality
309	DC bias variable-voltage source	License key	Recommend N9910X-713 cable
310	Built-in power meter	License key	None
312	Channel scanner	License key	233
330	Pulse measurements	License key	None
350	Real-time spectrum analyzer (RTSA)	License key	233
351	I/Q Analyzer (IQA)	License key	233
355	Analog demodulation	License key	233
356	Noise figure (NF)	License key <sup>2</sup>	233, 235, 309 and accessory cable N9910X-713
370	Over-the-Air (OTA) LTE FDD	License key	233 and 307, recommend 235
377	Over-the-Air (OTA) 5GTF	License key	233 and 307, recommend 235
B04	Analysis bandwidth, 40 MHz <sup>3</sup>	License key	Requires 233. Recommend 350, 351 or 89600 VSA software.
B10	Analysis bandwidth, 100 MHz <sup>3</sup>	License key	Requires 233. Recommend 350, 351 or 89600 VSA software.

<sup>1</sup> 209 is a system based on two FieldFox units. See page 7, FAQ #9, for a detailed description of the system requirements.

<sup>2</sup> See page 8, FAQ #13 for external preamplifier and noise source requirements.

<sup>3</sup> 10 MHz standard.

## FieldFox Signal Analyzer Upgrades

### N9933BU, N9934BU, N9935BU, N9936BU, N9937BU, N9938BU

Option	Description	Upgrade contents	Additional requirements
030	Remote control capability	License key	Requires an iOS device
100	3.5 mm connectors	Not applicable	Not applicable
208	USB power sensor measurements versus frequency	License key	302
209	Extended range transmission analysis (ERTA)	License key	220 <sup>1</sup> , recommend 307
220	Full-band tracking generator	License key	None
235	Preamplifier	License key	None
236	Interference analyzer and spectrogram	License key	None
238	Spectrum analyzer time gating	License key	None
302	External USB power sensor support	License key	None
307	GPS receiver	License key	None
309	DC bias variable-voltage source	License key	Recommend N9910X-713 cable
310	Built-in power meter	License key	None
312	Channel scanner	License key	None
320	Reflection measurements (Return Loss, VSWR and Scalar)	License key <sup>2</sup>	Option 220 for all models Option 100 and 220 for N9938B
330	Pulse measurements	License key	None
350	Real-time spectrum analyzer (RTSA)	License key	None
351	I/Q Analyzer (IQA)	License key	None
355	Analog demodulation	License key	None
356	Noise figure (NF)	License key <sup>3</sup>	235, 309 and accessory cable N9910X-713
370	Over-the-Air (OTA) LTE FDD	License key	307, recommend 235
377	Over-the-Air (OTA) 5GTF	License key	307, recommend 235
B04	Analysis bandwidth, 40 MHz <sup>4</sup>	License key	Recommend 350, 351 or 89600 VSA software.
B10	Analysis bandwidth, 100 MHz <sup>3</sup>	License key	Recommend 350, 351 or 89600 VSA software.

<sup>1</sup> 209 is a system based on two FieldFox units. See page 7, FAQ #9, for a detailed description of the system requirements.

<sup>2</sup> On N9938B, Option 320 is only available as a software upgrade if the spectrum analyzer is already equipped with Option 100, which is 3.5 mm connectors on the test port. Option 100 must have been ordered at the time of original purchase. It cannot be upgraded later.

<sup>3</sup> See page 8, FAQ #13 for external preamplifier and noise source requirements.

<sup>4</sup> 10 MHz standard.



## Documentation

By default, a printed copy of the User's Guide is not included in FieldFox orders. If you wish to receive the printed User's Guide, please order N99xxB Option ABA.

Option	Description	Notes
N99xxB-0B0	Do not include User's Guide	
N99xxB-ABA	Printed User's Guide in English	

The latest FieldFox User's Guide (manual) is available online from: [www.keysight.com/find/fieldfoxsupport](http://www.keysight.com/find/fieldfoxsupport)  
The Service Guide, SCPI Programming Guide, Quick Reference Guide, and Data Link software help file can also be found via the website above.

## Calibration Kits

FieldFox analyzers support most standard HP/Agilent/Keysight mechanical calibration kits and all Keysight USB ECal modules. Component list shows calibration components, some calibration kits also include adaptors. Custom calibration kits can be created and uploaded to FieldFox using Data Link software.

Model	Description	Connector	Frequency range	Components
<b>7-16</b>				
N9910X-802	3-in-1 OSL cal kit	7/16 (m)	DC to 4 GHz	Open, short, load (all male)
N9910X-803	3-in-1 OSL cal kit	7/16 (f)	DC to 4 GHz	Open, short, load (all female)
85038A	Standard cal kit	7/16	DC to 7.5 GHz	Open, short, load (both female and male)
<b>Type-N, 50 Ω</b>				
N9910X-800	3-in-1 OSL cal kit	Type-N (m)	DC to 6 GHz	Open, short, load (all male)
N9910X-801	3-in-1 OSL cal kit	Type-N (f)	DC to 6 GHz	Open, short, load (all female)
85032E	Economy cal kit	Type-N (m)	DC to 6 GHz	Open, short, load (all male)
85514A	4-in-1 OSLT cal kit	Type-N (m)	DC to 9 GHz	Open, short, load, thru (all male)
85515A	4-in-1 OSLT cal kit	Type-N (f)	DC to 9 GHz	Open, short, load, thru (all female)
85032F	Standard cal kit	Type-N	DC to 9 GHz	Open, short, load (both female and male)
85518A	4-in-1 OSLT cal kit	Type-N (m)	DC to 18 GHz	Open, short, load, thru (all male)
85519A	4-in-1 OSLT cal kit	Type-N (f)	DC to 18 GHz	Open, short, load, thru (all female)
85054D	Economy cal kit	Type-N	DC to 18 GHz	Open, short, load, thru (both female and male)
85054B	Standard cal kit	Type-N	DC to 18 GHz	Open, short, fixed load, sliding load (both female and male)
85092C	ECaL, 2-ports	Type-N	300 kHz to 9 GHz	Connectors configurable
N4690B/C	ECaL, 2-ports	Type-N	300 kHz to 18 GHz	Connectors configurable
N7550A	ECaL economy, 2-ports	Type-N	DC to 4 GHz	Connectors configurable
N7551A	ECaL economy, 2-ports	Type-N	DC to 6.5 GHz	Connectors configurable
N7552A	ECaL economy, 2-ports	Type-N	DC to 9 GHz	Connectors configurable
N7553A	ECaL economy, 2-ports	Type-N	DC to 14 GHz	Connectors configurable
N7554A	ECaL economy, 2-ports	Type-N	DC to 18 GHz	Connectors configurable

Model	Description	Connector	Frequency range	Components
<b>Type-N, 75 Ω<sup>1</sup></b>				
85036B	Standard cal kit	Type-N 75 Ω	DC to 3 GHz	Open, short, load (both female and male)
85036E	Economy cal kit	Type-N(m) 75 Ω	DC to 3 GHz	Open, short, load, all male
85096C	ECaL, 2-ports	Type-N(m) 75 Ω	300 kHz to 3 GHz	Connectors configurable
<b>3.5 mm</b>				
85520A	4-in-1 OSLT	3.5 mm (m)	DC to 26.5 GHz	Open, short, load, thru (all male)
85521A	4-in-1 OSLT	3.4 mm (f)	DC to 26.5 GHz	Open, short, load, thru (all female)
85033D/E	Economy cal kit	3.5 mm	DC to 6/9 GHz	Open, short, fixed load (both female and male)
85052D	Economy cal kit	3.5 mm	DC to 26.5 GHz	Open, short, fixed load (both female and male)
85052B	Standard cal kit	3.5 mm	DC to 26.5 GHz	Open, short, fixed load, sliding load (both female and male)
85052C	Precision TRL kit	3.5 mm	DC to 26.5 GHz	Open, short, fixed load (both female and male), two-line lengths
85093C	ECaL, 2-ports	3.5 mm	300 kHz to 9 GHz	Connectors configurable
N4691B	ECaL, 2-ports	3.5 mm	300 kHz to 26.5 GHz	Connectors configurable
N7550A	ECaL economy, 2-ports	3.5 mm	DC to 4 GHz	Connectors configurable
N7551A	ECaL economy, 2-ports	3.5 mm	DC to 6.5 GHz	Connectors configurable
N7552A	ECaL economy, 2-ports	3.5 mm	DC to 9 GHz	Connectors configurable
N7553A	ECaL economy, 2-ports	3.5 mm	DC to 14 GHz	Connectors configurable
N7554A	ECaL economy, 2-ports	3.5 mm	DC to 18 GHz	Connectors configurable
N7555A	ECaL economy, 2-ports	3.5 mm	DC to 26.5 GHz	Connectors configurable
<b>2.92 mm (same as K connector)</b>				
85561A	4-in-1 OSLT cal kit	2.92 mm (f)	DC to 40 GHz	Open, short, fixed load, thru (all female)
85562A	4-in-1 OSLT cal kit	2.92 mm (m)	DC to 40 GHz	Open, short, fixed load, thru (all male)
85056KE01 <sup>2</sup>	Standard cal kit	2.92 mm	DC to 40 GHz	Open, short, fixed load, sliding load (both female and male)
85056KE02 <sup>3</sup>	Economy cal kit	2.92 mm	DC to 40 GHz	Open, short, fixed load (both female and male)
N4692A	ECaL	2.92 mm	10 MHz to 40 GHz	Connectors configurable
<b>2.4 mm</b>				
85563A	3-in-1 OSL cal kit	2.4 mm (f)	DC to 50 GHz	Open, short, fixed load (all female)
85564A	3-in-1 OSL cal kit	2.4 mm (m)	DC to 50 GHz	Open, short, fixed load (all male)
85056D	Economy cal kit	2.4 mm	DC to 50 GHz	Open, short, fixed load (both female and male)
85056A	Standard cal kit	2.4 mm	DC to 50 GHz	Open, short, load, fixed load, sliding load (both female and male)
N4693A	ECaL	2.4 mm	10 MHz to 50 GHz	Connectors configurable

<sup>1</sup> Recommend ordering quantity 2 of N9910X Option 846, 50 to 75 Ω adapter.

<sup>2</sup> Same as Maury's 8770C47

<sup>3</sup> Same as Maury's 8770D47

Model	Description	Connector	Frequency range	Components
<b>Waveguide</b>				
N9911X-11x	Econ. waveguide cal kit	WR-137	5.38 to 8.18 GHz	Short, termination, offset length
N9911 X-21x	Econ. waveguide cal kit	WR-90	8.2 to 12.5 GHz	Short, termination, offset length
N9911X-31x	Econ. waveguide cal kit	WR-62	11.9 to 18 GHz	Short, termination, offset length
N9911 X-41x	Econ. waveguide cal kit	WR-42	17.6 to 26.7 GHz	Short, termination, offset length
X11644A	Waveguide cal kit	WR-90	8.2 to 12.4 GHz	Short, shim, termination, standard section
P11644A	Waveguide cal kit	WR-62	12.4 to 18 GHz	Short, shim, termination, standard section
K11644A	Waveguide cal kit	WR-42	18 to 26.5 GHz	Short, shim, termination, standard section

## Accessories

### Cables

All cables listed below are rugged phase-stable cables.

Model	Cable connector	Other cable connector	Max frequency	Length (ft)	Length (m)
N9910X-700	Type-N (m)	Type-N (f)	18 GHz	3.28 ft	1 m
N9910X-701	Type-N (m)	Type-N (m)	18 GHz	3.28 ft	1 m
N9910X-708	3.5 mm (m)	3.5 mm (f)	26.5 GHz	3.28 ft	1 m
N9910X-709	3.5 mm (f)	3.5 mm (f)	26.5 GHz	3.28 ft	1 m
N9910X-714	2.4 mm (f)	2.4 mm (m)	50 GHz	3.28 ft	1 m
N9910X-715	2.4 mm (f)	2.4 mm (f)	50 GHz	3.28 ft	1 m
N9910X-810	Type-N (m)	Type-N (m)	6 GHz	5 ft	1.5 m
N9910X-811	Type-N (m)	Type-N (f)	6 GHz	5 ft	1.5 m
N9910X-812	Type-N (m)	Type-N (m)	8 GHz	12 ft	3.6 m
N9910X-813	Type-N (m)	Type-N (f)	8 GHz	12 ft	3.6 m
N9910X-814	Type-N (m)	7/16 (m)	6 GHz	5 ft	1.5 m
N9910X-815	Type-N (m)	7/16 (m)	6 GHz	12 ft	3.6 m
N9910X-816	Type-N (m)	Type-N (f)	6 GHz	3.28 ft	1 m
N9910X-817	Type-N (m)	Type-N (m)	6 GHz	3.28 ft	1 m

### Preamplifiers

Model	
U7227A	USB preamplifier, 10MHz to 4 GHz <a href="http://www.keysight.com/find/U7227A">www.keysight.com/find/U7227A</a>
U7227C	USB preamplifier, 100MHz to 26.5 GHz <a href="http://www.keysight.com/find/U7227C">www.keysight.com/find/U7227C</a>
U7227F	USB preamplifier, 2 to 50 GHz <a href="http://www.keysight.com/find/U7227F">www.keysight.com/find/U7227F</a>
U7228A	USB preamplifier, 10MHz to 4 GHz <a href="http://www.keysight.com/find/U7228A">www.keysight.com/find/U7228A</a>
U7228C	USB preamplifier, 100MHz to 26.5 GHz <a href="http://www.keysight.com/find/U7228C">www.keysight.com/find/U7228C</a>
U7228F	USB preamplifier, 2 to 50 GHz <a href="http://www.keysight.com/find/U7228F">www.keysight.com/find/U7228F</a>

## Noise sources

Model	
346A/B/C/K01/K40	346 Series noise source family <a href="http://www.keysight.com/find/346noisesources">www.keysight.com/find/346noisesources</a>

## Antennas

Model	
N9910X-820	Antenna, directional, multiband, 800 to 2500 MHz, 10 dBi, Type-N (f)
N9910X-821	Antenna, telescopic whip, 70 MHz to 1 GHz, BNC (m)
N9910X-822	Antenna, directional, log periodic, 600 MHz to 9 GHz, Type-N (f)
N9910X-823	Antenna, cellular narrowband, 824 to 869 MHz, Type-N (f)
N9910X-824	Antenna, cellular narrowband, PCS 1850 to 1990 MHz, Type-N (f)
N9910X-825	Antenna, GPS, active, SMA (m)

## RF and microwave adaptors

Model	
83059A	Coaxial adapter, 3.5 mm (m) to 3.5 mm (m), 26.5 GHz
83059B	Coaxial adapter, 3.5 mm (f) to 3.5 mm (f), 26.5 GHz
83059C	Coaxial adapter, 3.5 mm (m) to 3.5 mm (f), 26.5 GHz
N9910X-601	Coaxial adapter, NMD 2.4 mm (f) to Type-N (f), 50-ohm, 18 GHz
N9910X-602	Coaxial adapter, NMD 2.4 mm (f) to 2.92 mm/K (f), 40 GHz
N9910X-603	Coaxial adapter, NMD 2.4 mm (f) to 3.5 mm (f), 26.5 GHz
N9910X-604	3.5 mm NMD (f) to 3.5 mm (f) adaptor
N9910X-605	3.5 mm NMD (f) to Type-N (f) adaptor
N9910X-843	Coaxial adapter, Type-N (m) to 7/16 DIN (f)
N9910X-845	Adapter kit: Type-N (f) to 7/16 DIN (f), Type-N (f) to 7/16 DIN (m), Type-N (f) to Type-N (f)
N9910X-846	Coaxial adapter, Type-N (m) 50 ohm to Type-N (f) 75 ohm
N9910X-847	Adapter kit: Type-N (f) to TNC (m) adapter, Type-N (f) to TNC (f) adapter, 11 GHz
N9910X-848	Coaxial adapter, Type-N (f) to 3.5 mm (f), 18 GHz
N9910X-849	Coaxial adapter, Type-N (f) to 3.5 mm (m), 18 GHz
N9910X-850	Coaxial adapter, Type-N (m) to Type-N (m), 18 GHz
N9910X-851	Coaxial adapter, Type-N (f) to Type-N (f), 18 GHz
N9910X-852	Coaxial adapter, Type-N (m) to Type-N (f), 18 GHz
N9910X-856	Coaxial adapter, 2.4 mm (f) to 2.4 mm (f), 50 GHz
N9910X-857	Coaxial adapter, 2.4 mm (f) to 2.92 mm/K (f), 40 GHz

### Other RF and microwave accessories

Model	
N9910X-860	Fixed attenuator, 40 dB, 100 W, DC to 3 GHz, Type-N (m) to Type-N (f)
N9910X-861	Fixed attenuator, 40 dB, 50 W, DC to 8.5 GHz, Type-N (m) to Type-N (f)
N9910X-874 <sup>1</sup>	External bias-tee, 2.5 MHz to 6 GHz, 1 W, 0.5 A
N9910X-712	Trig/Ref in Cable SMA (m) to BNC (f), 1 m or 3.28 ft
N9910X-713	Bias-tee power cable SMB (f) to BNC (m), 1 m or 3.28 ft

### Other FieldFox accessories

Model	
N9910X-870	Extra battery
N9910X-876	Extra high capacity battery
N9910X-872	External battery charger
N9910X-873	AC/DC adapter
N9910X-875	DC car charger and adapter
N9910X-880	Extra soft carrying case with backpack and shoulder strap
N9910X-881	Hard transit case
N9910X-887	Fan replacement kit

Description	Accessory
N9910X-701 Type-N (m) to Type-N (m) cable, 3.28 ft	
N9910X-708 3.5 mm (m) to 3.5 mm (f) cable, 3.28 ft	
N9910X-820 Antenna, directional	
N9910X-823 Antenna, cellular narrowband	
N9910X-822 Antenna, directional	

Description	Accessory
N9910X-812 Type-N (m) to Type-N (m) cable, 12 ft	
N9910X-816 Type-N (m) to Type-N (f) cable, 3.28 ft	
N9910X-821 Antenna, telescopic whip™	
N9910X-848 Coaxial adapter, Type-N(f) to 3.5 mm (f)	
N9910X-875 DC car charger and adapter	

<sup>1</sup> Also recommend ordering N9910X-713 Bias-Tee Power Cable, SMB(f) to BNC(m), 3.28 ft., to connect to the FieldFox DC bias variable voltage source port.

Description	Accessory
-------------	-----------

N9910X-825  
Antenna, GPS,  
active



N9910X-870  
Extra battery



N9910X-872  
External battery  
charger



N9910X-881  
Hard transit case



N9910X-811  
Type-N (m) to  
Type-N (f) cable,  
5 ft



85514A  
4-in-1 OSLT cal  
kit, Type-N (m) 9  
GHz



85515A  
4-in-1 OSLT cal  
kit, Type-N (f), 9  
GHz



Description	Accessory
-------------	-----------

N9910X-873  
AD/DC adapter



N9910X-874  
External bias-tee



N4690B  
2-port ECal, Type-N, 18  
GHz



N9910X-800  
3-in-1 OSL cal kit, Type-N  
(m), 6 GHz



N9910X-801  
3-in-1 OSL cal kit, Type-N  
(f), 6 GHz



85520A  
4-in-1 OSLT cal kit, 3.5 mm  
(m), 26.5 GHz



85521A  
4-in-1 OSLT cal kit, 3.5 mm  
(f), 26.5 GHz



Description	Accessory
-------------	-----------

85518A  
4-in-1 OSLT cal  
kit, Type-N (m),  
18 GHz



85519A  
4-in-1 OSLT cal  
kit, Type-N (f), 18  
GHz



85054D  
Economy cal kit,  
Type-N, 18 GHz



N9911X-  
211/212/213/214  
WR-90  
economical cal kit



N4693A  
2.4 mm 2-port  
ECal, 50 GHz



X11644A  
WR-90 standard  
cal kit



Description	Accessory
-------------	-----------

85033D/E  
3.5 mm cal kit, 9 GHz



85052D  
3.5 mm cal kit, 26.5 GHz



N4691B  
2-port ECal, 3.5 mm, 26.5  
GHz



N4692A  
2.92 mm, 2-port ECal,  
40 GHz



85056D  
2.4 mm cal kit, 50 GHz



Learn more at: [www.keysight.com](http://www.keysight.com)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

