

Power entry module with PCB mounting possibility

FN 9226

- up to 10A current ratings
 - IEC 950-compliant
 - circuit board mounting possibility
 - good HF coupling to the equipment housing
-
- Nennstrom bis 10A
 - IEC 950 konform
 - Leiterplatten-Montage möglich
 - Gute HF-Ankopplung an das Gerätegehäuse
-
- courant nominal jusqu'à 10A
 - conforme à CEI 950
 - possibilité de montage sur carte
 - bon couplage HF au boîtier de l'appareil



Filter selection table

Choose the family FN xxx with the required body style and features, and add -?? to determine current rating, and /?? for output connections. Example: FN 9226-1/06 is a horizontal screw-mounting filter, rated for 1A, with fast-on outputs.

Approvals



| Family | Current ratings A at 40°C (25°) | | | | Output connection | | Housing |
|--------------------|------------------------------------|---------|---------|---------|-------------------|-----|---------|
| | 1 (1.2) | 3 (3.6) | 6 (7.3) | 10 (10) | I | II | |
| FN 9226 -?? /?? | -1 | -3 | -6 | -10 | /02 | /06 | ✓ |
| Inductance L mH | | | | | | | |
| | 4.65 | 1.24 | 0.52 | 0.27 | | | |

Additional specifications


| Filter type | Capacitance | | Maximum leakage µA/phase | Res. R MΩ | Weight g | Maximum operating voltage | | Operating frequency Hz | Hipot test voltage | |
|----------------------------|----------------------|----------------------|-----------------------------|-----------------|-------------|---------------------------|-------|---------------------------|--------------------|------------|
| | C _x nF | C _y nF | | | | VAC | Hz | | PN→E VAC | P→N VAC |
| All standard types | 47 | 2.2 | 190 | - | 40 | 250 | 50/60 | DC to 400 | 2000 | 760 |
| B types (medical) optional | 47 | - | 2 | 2.2 | 40 | 250 | 50/60 | DC to 400 | 2500 | 760 |

MTBF at 40°C, 230V, per Mil-HB-217F: 800,000 hours


FN 9226 insertion loss

Per CISPR 17; A = 50Ω/50Ω sym, B = 50Ω/50Ω asym, C = 0.1Ω/100Ω sym, D = 100Ω/0.1Ω sym


1 amp types




3 amp types





6 amp types



10 amp types



Electrical schematics

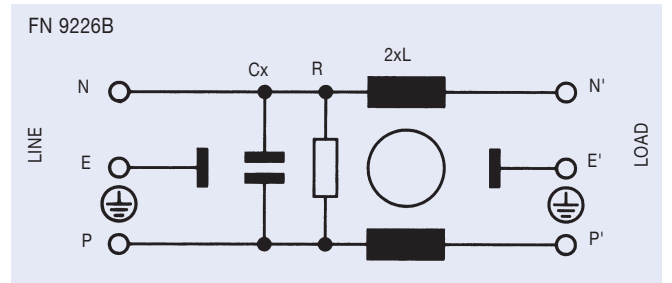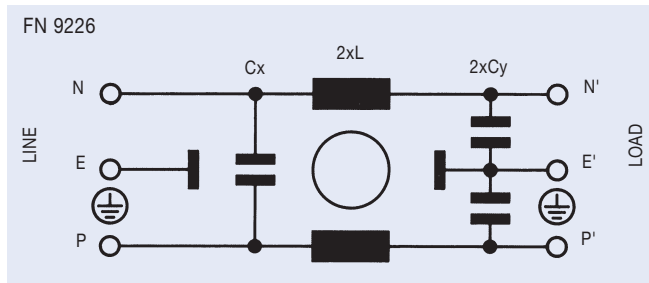


See tables for component values


Mechanical data

| | | Tol. mm |
|----------|-------|------------|
| A | 48 | ± 0.5 |
| B | 22.4 | ± 0.3 |
| C | 40 | ± 0.2 |
| D | 34.7 | ± 0.3 |
| F | 5.7 | ± 0.3 |
| H | Ø4 | - |
| J | 13.2 | ± 0.5 |
| K | 14 | ± 0.5 |
| L | 6.8 | ± 0.3 |
| M | R≤3.5 | - |
| N | 22.6 | +0.2 0 |
| P | 34.4 | +0.2 0 |
| R | Ø3.5 | - |
| V | 34 | ± 0.25 |
| W | 20 | ± 0.3 |


FRONT

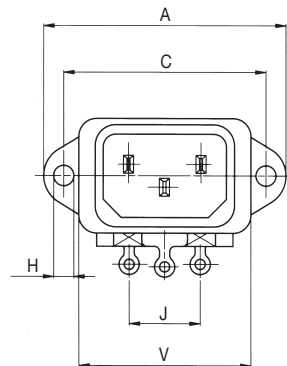

SIDE




PANEL CUT-OUT



All dimensions in mm; 1 inch = 25.4mm

IEC-inlet filters

power entry
modules

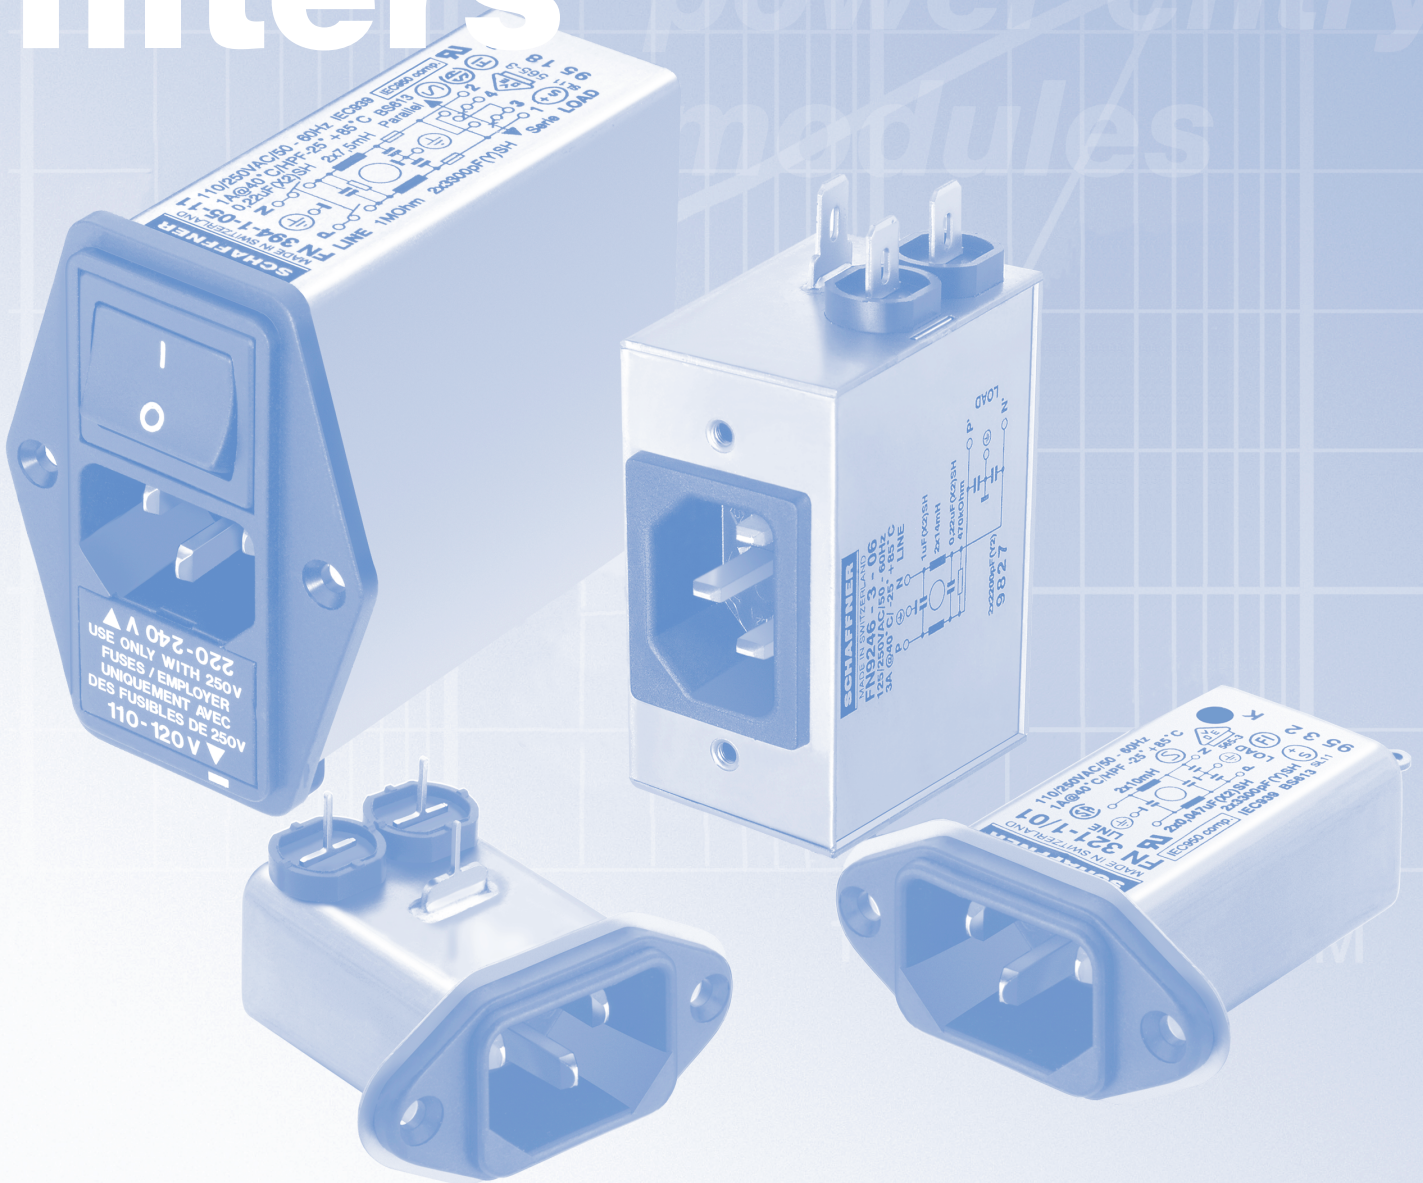

IEC-inlet filters

CONTENTS

General information

| | |
|-----------------------------|----|
| Filter selection chart..... | 60 |
| Ordering information | 61 |

Technical data

Power entry modules

| | |
|--------------|----|
| FN 321..... | 64 |
| FN 329..... | 66 |
| FN 9222..... | 68 |
| FN 9226..... | 72 |
| FN 9246..... | 74 |

Power entry modules with fuses

| | |
|--------------|----|
| FN 9260..... | 78 |
|--------------|----|

Power entry modules with fuses and switch or voltage selector

| | |
|-------------|----|
| FN 280..... | 82 |
| FN 370..... | 84 |
| FN 380..... | 87 |
| FN 390..... | 90 |

Installation instructions

| | |
|-----------------|----|
| (snap-in) | 92 |
|-----------------|----|

INHALT

Allgemeine Informationen

| | |
|----------------------------|----|
| Filterübersicht..... | 60 |
| Bestellinformationen | 61 |

Technische Daten

Steckerfilter

| | |
|--------------|----|
| FN 321..... | 64 |
| FN 329..... | 66 |
| FN 9222..... | 68 |
| FN 9226..... | 72 |
| FN 9246..... | 74 |

Steckerfilter mit Sicherungen

| | |
|--------------|----|
| FN 9260..... | 78 |
|--------------|----|

Steckerfilter mit Sicherungen und Schalter oder Spannungswähler

| | |
|-------------|----|
| FN 280..... | 82 |
| FN 370..... | 84 |
| FN 380..... | 87 |
| FN 390..... | 90 |

Einbauanweisung

| | |
|----------------|----|
| (Snap-in)..... | 92 |
|----------------|----|

TABLE DES MATIÈRES

Généralités

| | |
|---------------------------------------|----|
| Tableau de sélection des filtres..... | 60 |
| Pour commander..... | 61 |

Données techniques

Modules d'entrée d'alimentation

| | |
|--------------|----|
| FN 321 | 64 |
| FN 329..... | 66 |
| FN 9222..... | 68 |
| FN 9226..... | 72 |
| FN 9246..... | 74 |

Modules d'entrée d'alimentation avec fusibles

| | |
|--------------|----|
| FN 9260..... | 78 |
|--------------|----|

Modules d'entrée d'alimentation avec fusibles et interrupteur ou sélecteur de tension

| | |
|-------------|----|
| FN 280..... | 82 |
| FN 370..... | 84 |
| FN 380..... | 87 |
| FN 390..... | 90 |

Directives d'installation versions

| | |
|-----------------|----|
| (snap-in) | 92 |
|-----------------|----|

IEC-inlet filters

Time-to-Market

The most important reasons for choosing a catalog product lies in the rapid availability and the associated safety acceptances. Filter circuits with discrete components at the mains input can, of course, be built but do not necessarily represent the best solution particularly in products with a compressed development cycle such as in the PC field.

Standard IEC connector filters are a practical single-source solution. Thanks to their compact dimensions and supplementary options they offer numerous advantages to the user.

The following summary provides a simple and rapid means for making a filter pre-selection. Detailed information concerning the individual filters is given on the subsequent pages. Variants having an earth choke are designated by the letter "E" (e.g. FN 393E) and filters for medical applications by the letter "B" (e.g. FN 385B).

General technical information

Insertion loss

The insertion loss characteristics of the filters are measured in accordance with the CISPR 17 standard. Two test conditions are specified in Section 4.2 of the CISPR 17 standard namely input and output impedances of 50/50Ω and 0.1/100Ω. In general, the IEC inlet filters perform the same in the face of differential interference as in the 50Ω insertion loss test. In order to show the performance under realistic conditions, Schaffner also shows the attenuation curves obtained from the 0.1/100Ω test which are more meaningful for common mode interference. The inductance of the chokes used in the filters can change under load because of a saturation effect which can also affect the insertion loss.

Voltage ratings

The use of capacitors in accordance with IEC 384-14 means that Schaffner filters can be operated at voltages up to 10% over the nominal voltage rating.

Leakage current

The figure quoted for the leakage current to ground indicates the maximum value per phase at 230V/50Hz.

Switches

The switches used in the filters listed in this catalog have an in-rush current rating of up to 51A as defined in UL 1045, TV3.

Flammability classification

All the filters in this catalog comply with the requirements of UL 94V2 or UL 94V0.

Climatic classification

The filters made by Schaffner comply with the climatic classification 25/085/21 according to DIN IEC 68 Part 1 (ambient temperature -25°C to +85°C).

Component tolerances

| | -Tol. | +Tol. | Test |
|-------------|-------|-------|------|
| Inductance | 30% | 50% | 1kHz |
| Capacitance | 20% | 20% | 1kHz |
| Resistance | 10% | 10% | DC |

Current ratings

The nominal currents stated refer to an ambient temperature of 40°C. The maximum operating current at any other ambient temperature can be calculated by means of the following formula:

$$I = I_N \sqrt{(85 - \theta)/45}$$

Schaffner filters with IEC inlets


It is easy to determine which family of filters would be suitable for your particular application on the basis of the current range and insertion loss values together with the more important remarks shown at the right. Detailed technical information concerning each filter family can be found on the following pages.

| Family | Current rating [A] | | | | | | | | | | | | | | with earth line choke | for fuse(s) | with switch | with voltage selector | for switch mode power suppl. | for medical equipment | IEC 950-compliant | for PCB mounting | snap-in version | catalog page |
|---------|-----------------------------------|---|---|---|---|---|---|---|---|----|----|----|----|----|-----------------------|-------------|-------------|-----------------------|------------------------------|-----------------------|-------------------|------------------|-----------------|--------------|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | |
| FN 321 | [Current rating bar from 7 to 11] | | | | | | | | | | | | | | | | | ✓ | ✓ | | | | | 64 |
| FN 329 | [Current rating bar from 1 to 6] | | | | | | | | | | | | | | ✓ | | | | | ✓ | | | | 66 |
| FN 9222 | [Current rating bar from 1 to 14] | | | | | | | | | | | | | | | | | ✓ | ✓ | ✓ | | ✓ | | 68 |
| FN 9226 | [Current rating bar from 1 to 10] | | | | | | | | | | | | | | | | | | ✓ | ✓ | ✓ | | | 72 |
| FN 9246 | [Current rating bar from 1 to 14] | | | | | | | | | | | | | | | | | ✓ | ✓ | ✓ | | | | 74 |
| FN 9260 | [Current rating bar from 1 to 10] | | | | | | | | | | | | | | ✓ | | | | | ✓ | ✓ | | ✓ | 78 |
| FN 280 | [Current rating bar from 1 to 10] | | | | | | | | | | | | | | ✓ | ✓ | | | | ✓ | ✓ | | ✓ | 82 |
| FN 370 | [Current rating bar from 2 to 6] | | | | | | | | | | | | | | ✓ | | ✓ | | | ✓ | ✓ | | ✓ | 84 |
| FN 380 | [Current rating bar from 2 to 6] | | | | | | | | | | | | | | ✓ | ✓ | | | | ✓ | ✓ | | ✓ | 87 |
| FN 390 | [Current rating bar from 1 to 6] | | | | | | | | | | | | | | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | | | 90 |
| FN 1390 | [Current rating bar from 1 to 10] | | | | | | | | | | | | | | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | | | 90 |

Ordering information

FN 280, FN 321, FN 329,
FN 9222, FN 9226, FN 9246, FN 9260

FN 9222 & - x / y

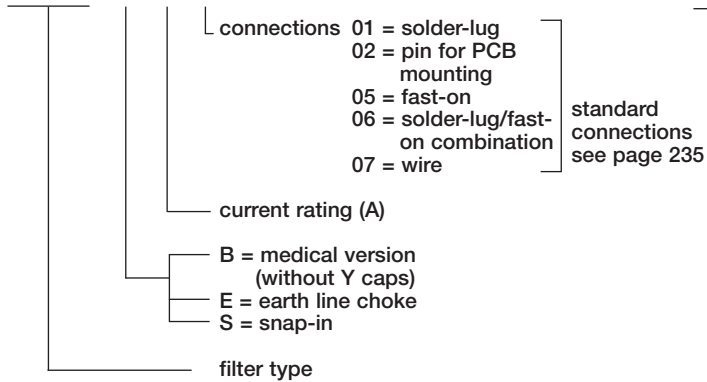


Examples:

- FN 282-2/06** Type FN 282; current rating 2A; connection solder-lug/fast-on
- FN 9222B-1/06** Type FN 9222; medical version; current rating 1 A; connection solder-lug/fast-on
- FN 9222-10/07** Type FN 9222; current rating 10A; connection wire

FN 370

FN 379 & - 2 / x y

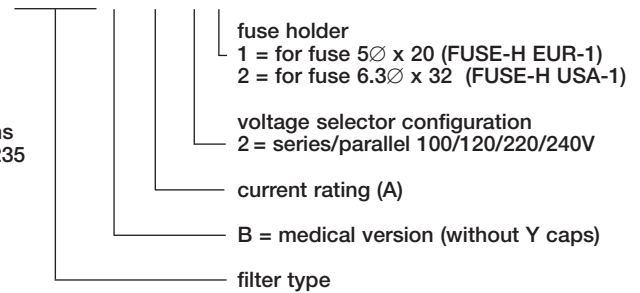


Examples:

- FN 370-6/22** Type FN 370; current rating 6A; voltage selector series/parallel; fuse 6.3 x 32
- FN 375B-4/21** Type FN 375; medical version; current rating 4A; voltage selector series/parallel; fuse 5 x 20

FN 380

FN 389 & - 6 / x y

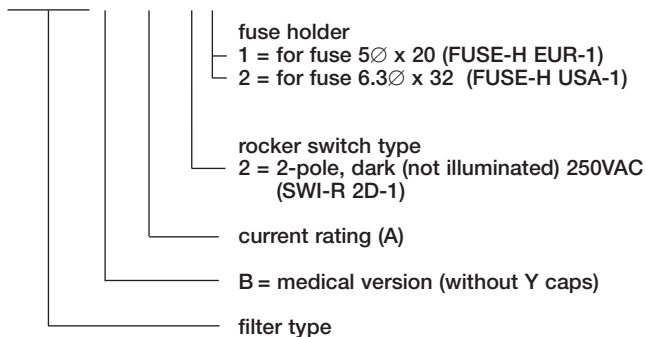


Examples:

- FN 380-2/22** Type FN 380; current rating 2A; 2-pole rocker switch; fuse 6.3 x 32
- FN 389B-6/21** Type FN 389; medical version; current rating 6A; 2-pole rocker switch; fuse 5 x 20

FN 390

FN 393 E - 1 - 05 / 1 1

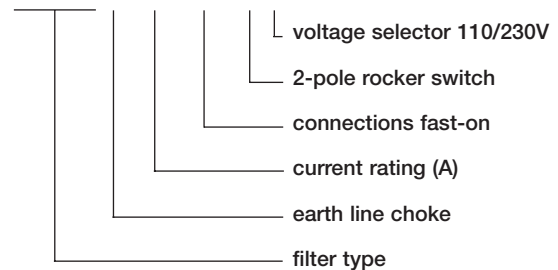

Example:

- FN 394E-2.5-05/11** Type FN 394; with earth line choke; current rating 2.5A; connection fast-on; 2-pole rocker switch; voltage selector 110/230V