

### Completely pre-assembled Signal Towers / KOMPAKT 37

# K37 plug EM 24VAC/DC GN/RD



Part No.:	698.220.75
Series:	Kompakt 37

MECHANICAL DATA				
Height	141 mm			
Diameter	38 mm			
Materials	PC			
Dome colour	Green Red			
Housing colour	Black			
Protection category	IP65			
Connection	M12 plug 5-pole			
Cable entry	Membrane grommet			
Cable entry minimum	d = 1 mm			
Cable entry maximum	d = 9 mm			
Tension relief	Pull-out protection			
Type of fixing	Built-in mounting			
Working temperature minimum	-20°C			
Working temperature maximum	+50°C			
Weight with packaging	112 g			
Product weight	73 g			

ELECTRICAL DATA				
Operating voltage	24V			
Operating voltage type	AC/DC			
Operating voltage frequency	50Hz			
Operating voltage tolerance	+/- 10%			
Rated operational voltage	24 VDC			
Rated operational current	70 mA			
Rated inrush current	500 mA			
Protection class	Protection class 2			
Pollution degree	3 In the connection area: 2			

OPTICAL DATA				
Light source	LED			
Light colour	Green Red			
Optical signal image	Permanent			
Service life optical	50,000 h maximum			

APPROVAL DATA				
Conforms with CE	Yes			
WEEE	Yes			

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



### Completely pre-assembled Signal Towers / KOMPAKT 37

## K37 plug EM 24VAC/DC GN/RD


Conforms with RED directive	No
Conform with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12 Type 4X
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with AS-I	No
ICAO Certification	No
Conforms with GL	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

## K37 plug EM 24VAC/DC GN/RD

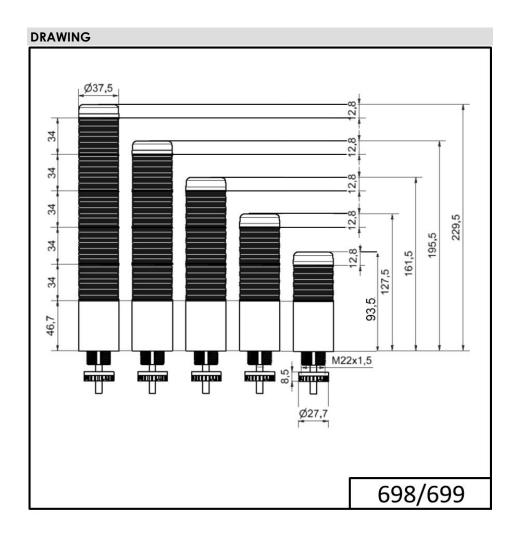

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.