
High Density Solder Cup And Straight P.C. Mount / Double Metal Shell Fixed Contact



	CONTACTS	SOCKET	PIN	в	C	D	E	F
Ī	15	.642	.666	.984	1.213	.090	.045	.756
		[16.30]	[16.92]	[25.0]	[30.8]	[2.29]	[1.145]	[19.2]
ſ	26	.969	.994	1.311	1.543	.090	.045	1.071
		[24.6]	[25.25]	[33.3]	[39.2]	[2.29]	[1.145]	[27.2]
	44	1.508	1.534	1.854	2.091	.090	.045	1.618
		[38.3]	[38.96]	[47.1]	[53.1]	[2.29]	[1.145]	[41.1]
Ī	62	2.157	2.182	2.50	2.732	.095	.047	2.256
		[54.8]	[55.42]	[63.5]	[69.4]	[2.41]	[1.205]	[57.3]
ſ	78	2.05	2.079	2.40	2.638	.095	.047	2.169
		[52.20]	[52.81]	[61.0	[67.0]	[2.41]	[1.205]	[55.1]

CONTACTS	A	В	С	D	
	.984	.090	.045	.277	
15	[25.0]	[2.29]	[1.145]	[7.04]	
	1.311	.090	.045	.277	
26	[33.3]	[2.29]	[1.145]	[7.04]	
	1.854	.090	.045	.277	
44	[47.1]	[2.29]	[1.145]	[7.04]	
	2.50	.095	.047	.275	
62	[63.5]	[2.41]	[0.120]	0.699	
=0	2.402	.095	.047	.275	
78	[61.0]	[2.41]	[0.120]	0.699	

ORDERING INFORMATION

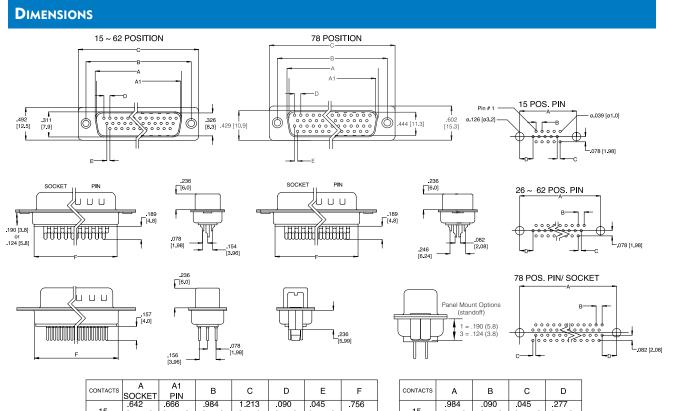