## **BNC Male Crimp Plug**





## **Specifications**

Impedance :  $50\Omega$ 

Working Voltage : 500Vrms @ sea level


Frequency Range : 0-4Ghz

Insertion Loss :  $\leq$  -0.2dB @ 3 GHz VSWR Max : 1.4:1 @ 3 GHz

For RG-8/X & 30/U, Belden 9258, Maxrad M8X-100 & M8X-1000, Micro 8/U, Remee 1600, Saxton 8315 & Times LMR-240 & LMR-240 Ultraflex Cable

Interface per MIL-STD-348A, Section 301.1

## Diagram

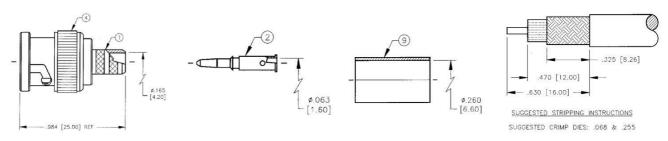

Dimensions: Inches (Millimetres)

No.	Description	Material	Finish	Qty
1	Body	Brass	Nickel	1
2	Pin	Brass	Gold	1
3	Di-electric	Delrin	None	1
4	Shell	Brass	Nickel	1
5	Gasket	S.I. Rubber	Red	1
6	Retaining Ring	Brass	Nickel	1
7	Spring	SK-5	Nickel	1
8	Washer	Brass	Nickel	1
9	Ferrule	Brass	Nickel	1

## **Part Number Table**

Description	Part Number	
BNC Male Crimp Plug, N,G,D For RG-8X,		
CBL GRP X	MC002017	

Important Notice: This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury

www.element14.com www.farnell.com www.newark.com

