



Aug.1.2016 Copyright 2016 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

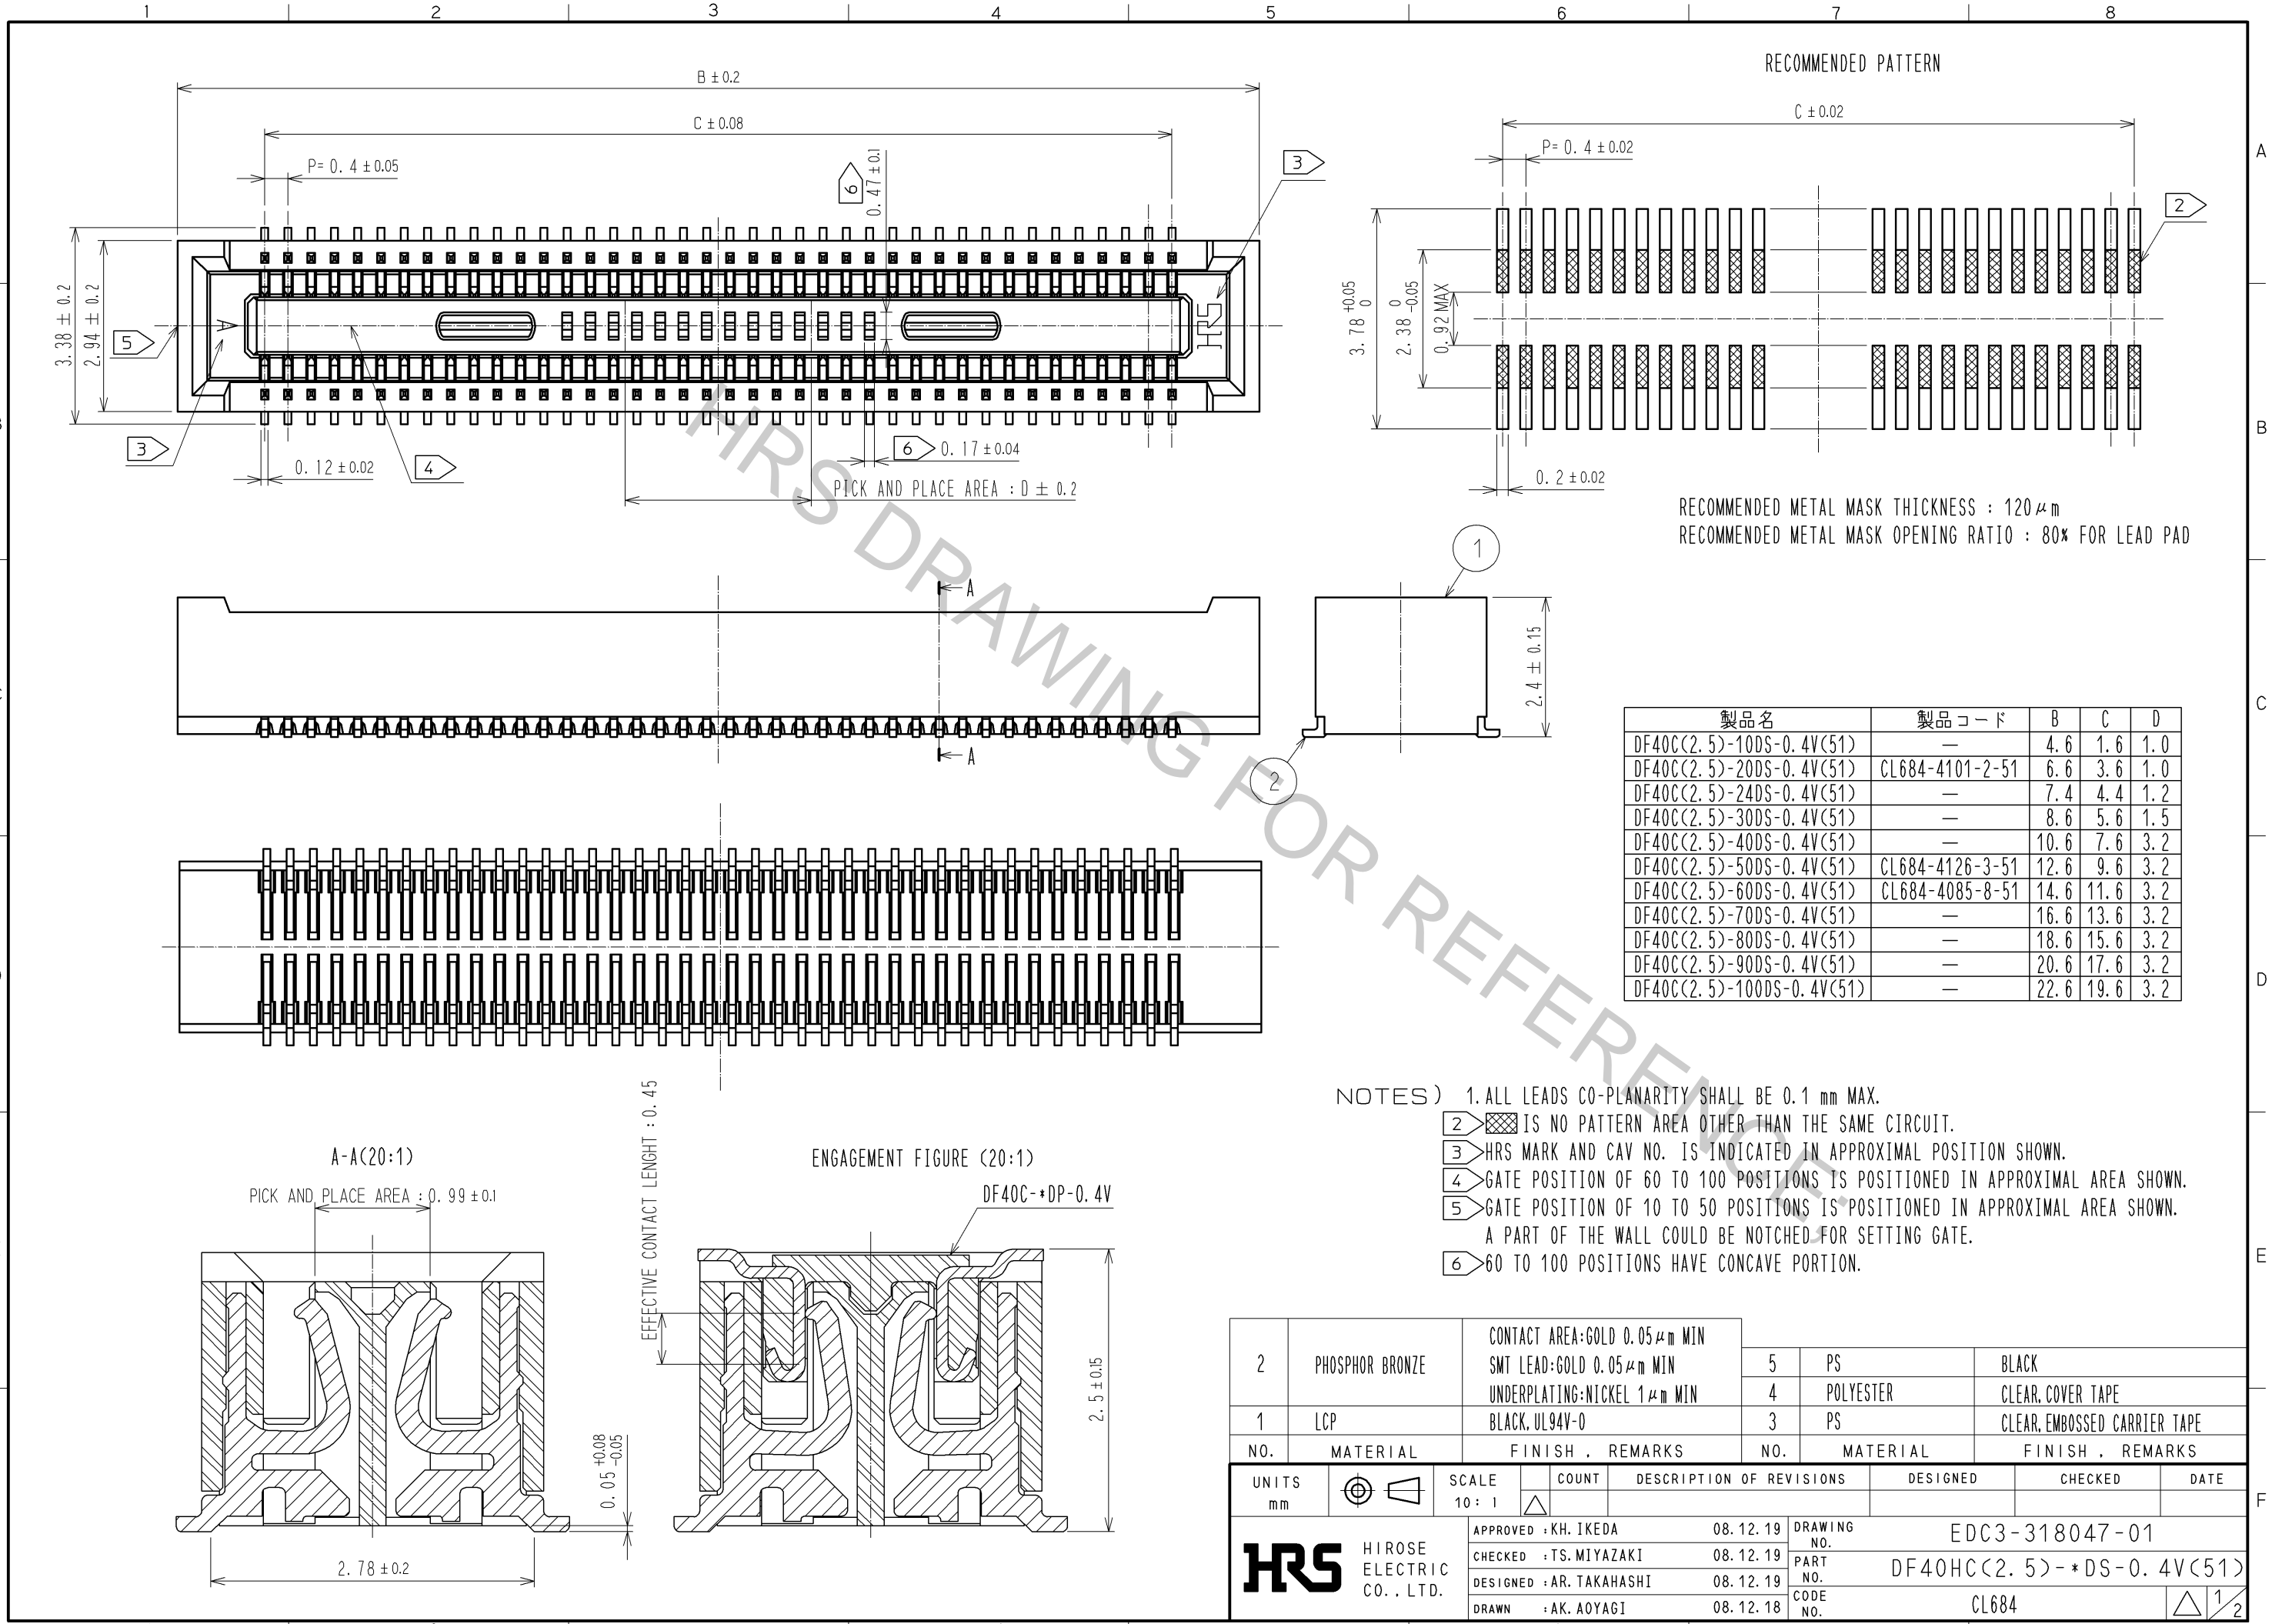

製品名	製品コード	B	C	D
DF40C(2.5)-10DS-0.4V(51)	—	4.6	1.6	1.0
DF40C(2.5)-20DS-0.4V(51)	CL684-4101-2-51	6.6	3.6	1.0
DF40C(2.5)-24DS-0.4V(51)	—	7.4	4.4	1.2
DF40C(2.5)-30DS-0.4V(51)	—	8.6	5.6	1.5
DF40C(2.5)-40DS-0.4V(51)	—	10.6	7.6	3.2
DF40C(2.5)-50DS-0.4V(51)	CL684-4126-3-51	12.6	9.6	3.2
DF40C(2.5)-60DS-0.4V(51)	CL684-4085-8-51	14.6	11.6	3.2
DF40C(2.5)-70DS-0.4V(51)	—	16.6	13.6	3.2
DF40C(2.5)-80DS-0.4V(51)	—	18.6	15.6	3.2
DF40C(2.5)-90DS-0.4V(51)	—	20.6	17.6	3.2
DF40C(2.5)-100DS-0.4V(51)	—	22.6	19.6	3.2

- NOTES) 1. ALL LEADS CO-PLANARITY SHALL BE 0.1 mm MAX.
 2. IS NO PATTERN AREA OTHER THAN THE SAME CIRCUIT.
 3. HRS MARK AND CAV NO. IS INDICATED IN APPROXIMAL POSITION SHOWN.
 4. GATE POSITION OF 60 TO 100 POSITIONS IS POSITIONED IN APPROXIMAL AREA SHOWN.
 5. GATE POSITION OF 10 TO 50 POSITIONS IS POSITIONED IN APPROXIMAL AREA SHOWN.
 A PART OF THE WALL COULD BE NOTCHED FOR SETTING GATE.
 6. 60 TO 100 POSITIONS HAVE CONCAVE PORTION.

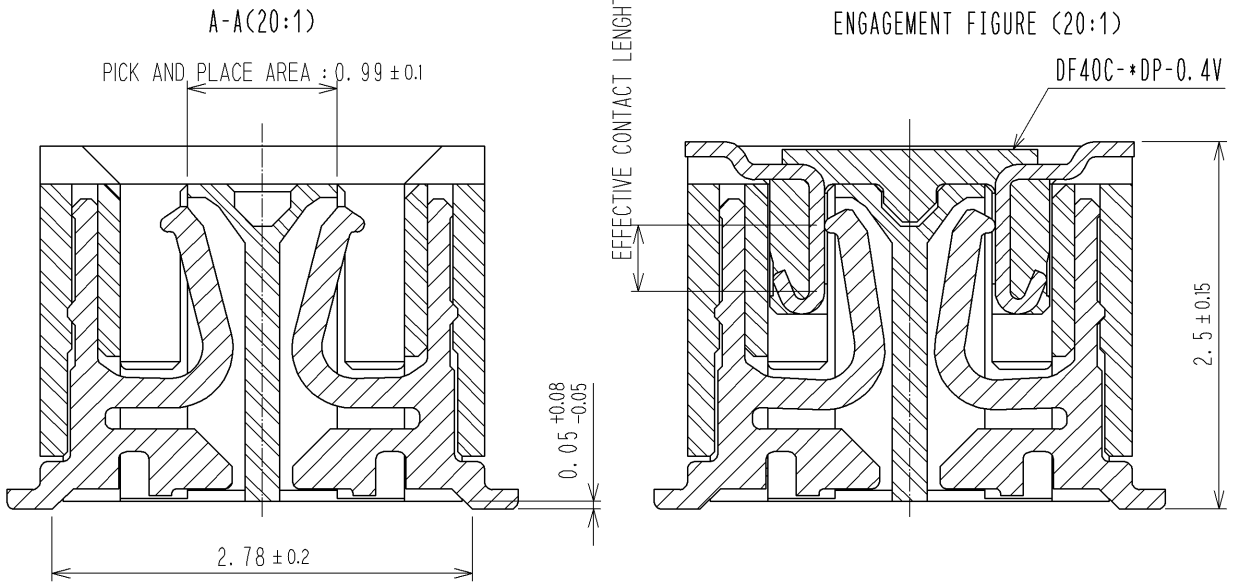

2	PHOSPHOR BRONZE	CONTACT AREA:GOLD $0.05 \mu\text{m}$ MIN SMT LEAD:GOLD $0.05 \mu\text{m}$ MIN UNDERPLATING:NICKEL $1 \mu\text{m}$ MIN	5	PS	BLACK		
1	LCP	BLACK, UL94V-0	4	POLYESTER	CLEAR, COVER TAPE		
			3	PS	CLEAR, EMBOSSED CARRIER TAPE		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
UNITS mm		SCALE 10:1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : KH. IKEDA 08.12.19	DRAWING NO. EDC3-318047-01				
		CHECKED : TS. MIYAZAKI 08.12.19	PART NO. DF40HC(2.5)-*DS-0.4V(51)				
		DESIGNED : AR. TAKAHASHI 08.12.19	CODE NO. CL684				
		DRAWN : AK. AOYAGI 08.12.18					

