


Aug.1.2016 Copyright 2016 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

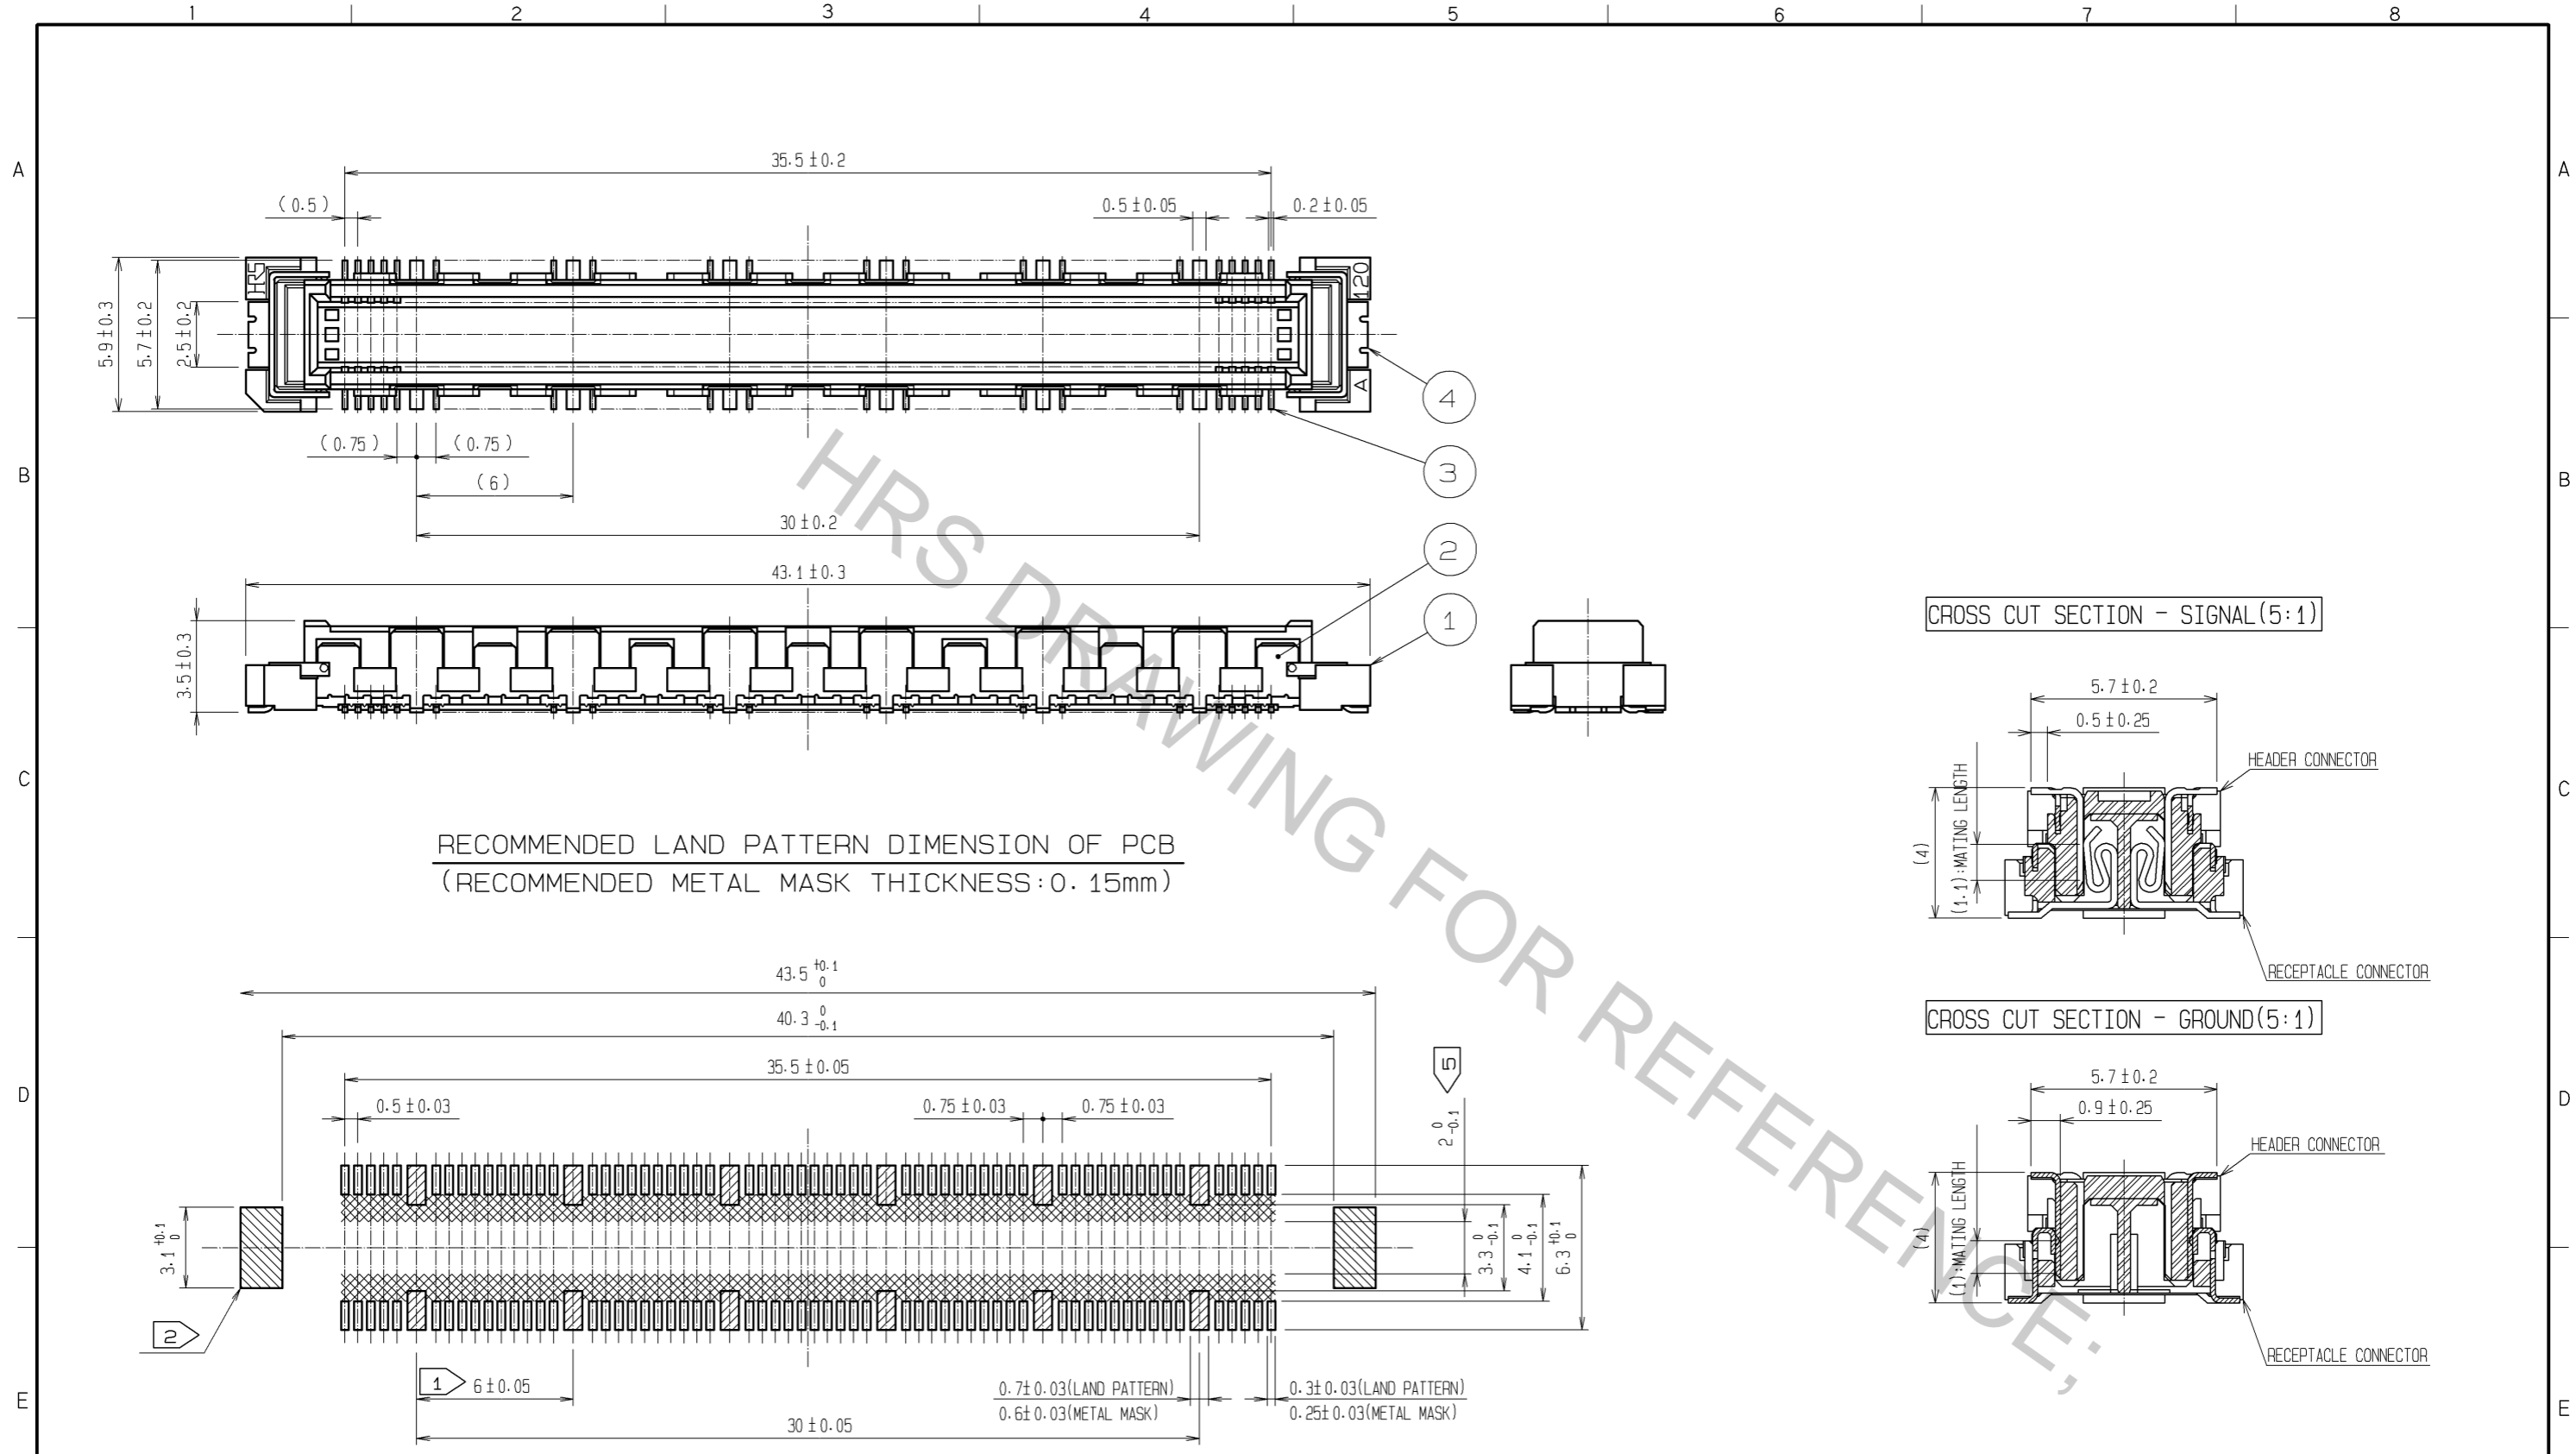

- NOTES
- ① 12 HATCHED PARTS: GROUND CIRCUIT.
 - ② 2 HATCHED PARTS: GROUND CIRCUIT.
 - 3 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 4 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - ⑤ MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

2	PHOSPHOR BRONZE	TIN-PLATING	4	PHOSPHOR BRONZE	TIN-PLATING					
1	LCP	BEIGE UL94V-0	3	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1µm min. LEAD AREA: TIN-PLATING 1µm min. UNDER PLATING: NICKEL 1µm min.					
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS			
UNITS		⊙	SCALE	△	COUNT		DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm			4 : 1				APPROVED : HS. OKAWA 08.06.26			
HIROSE ELECTRIC CO., LTD.		CHECED : HT. YAMAGUCHI 08.06.25		DRAWING NO.		EDC3-151950-25				
		DESIGNED : SY. KAMIGA 08.06.23		PART NO.		FX10B-120P/12-SV(71)				
		DRAWN : HK. SUNADORI 08.06.17		CODE NO.		CL570-0023-8-71				
						1/1				