


Aug.1.2016 Copyright 2016 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
2	DIS-C-000490	T.H	E.K	07.01.31					

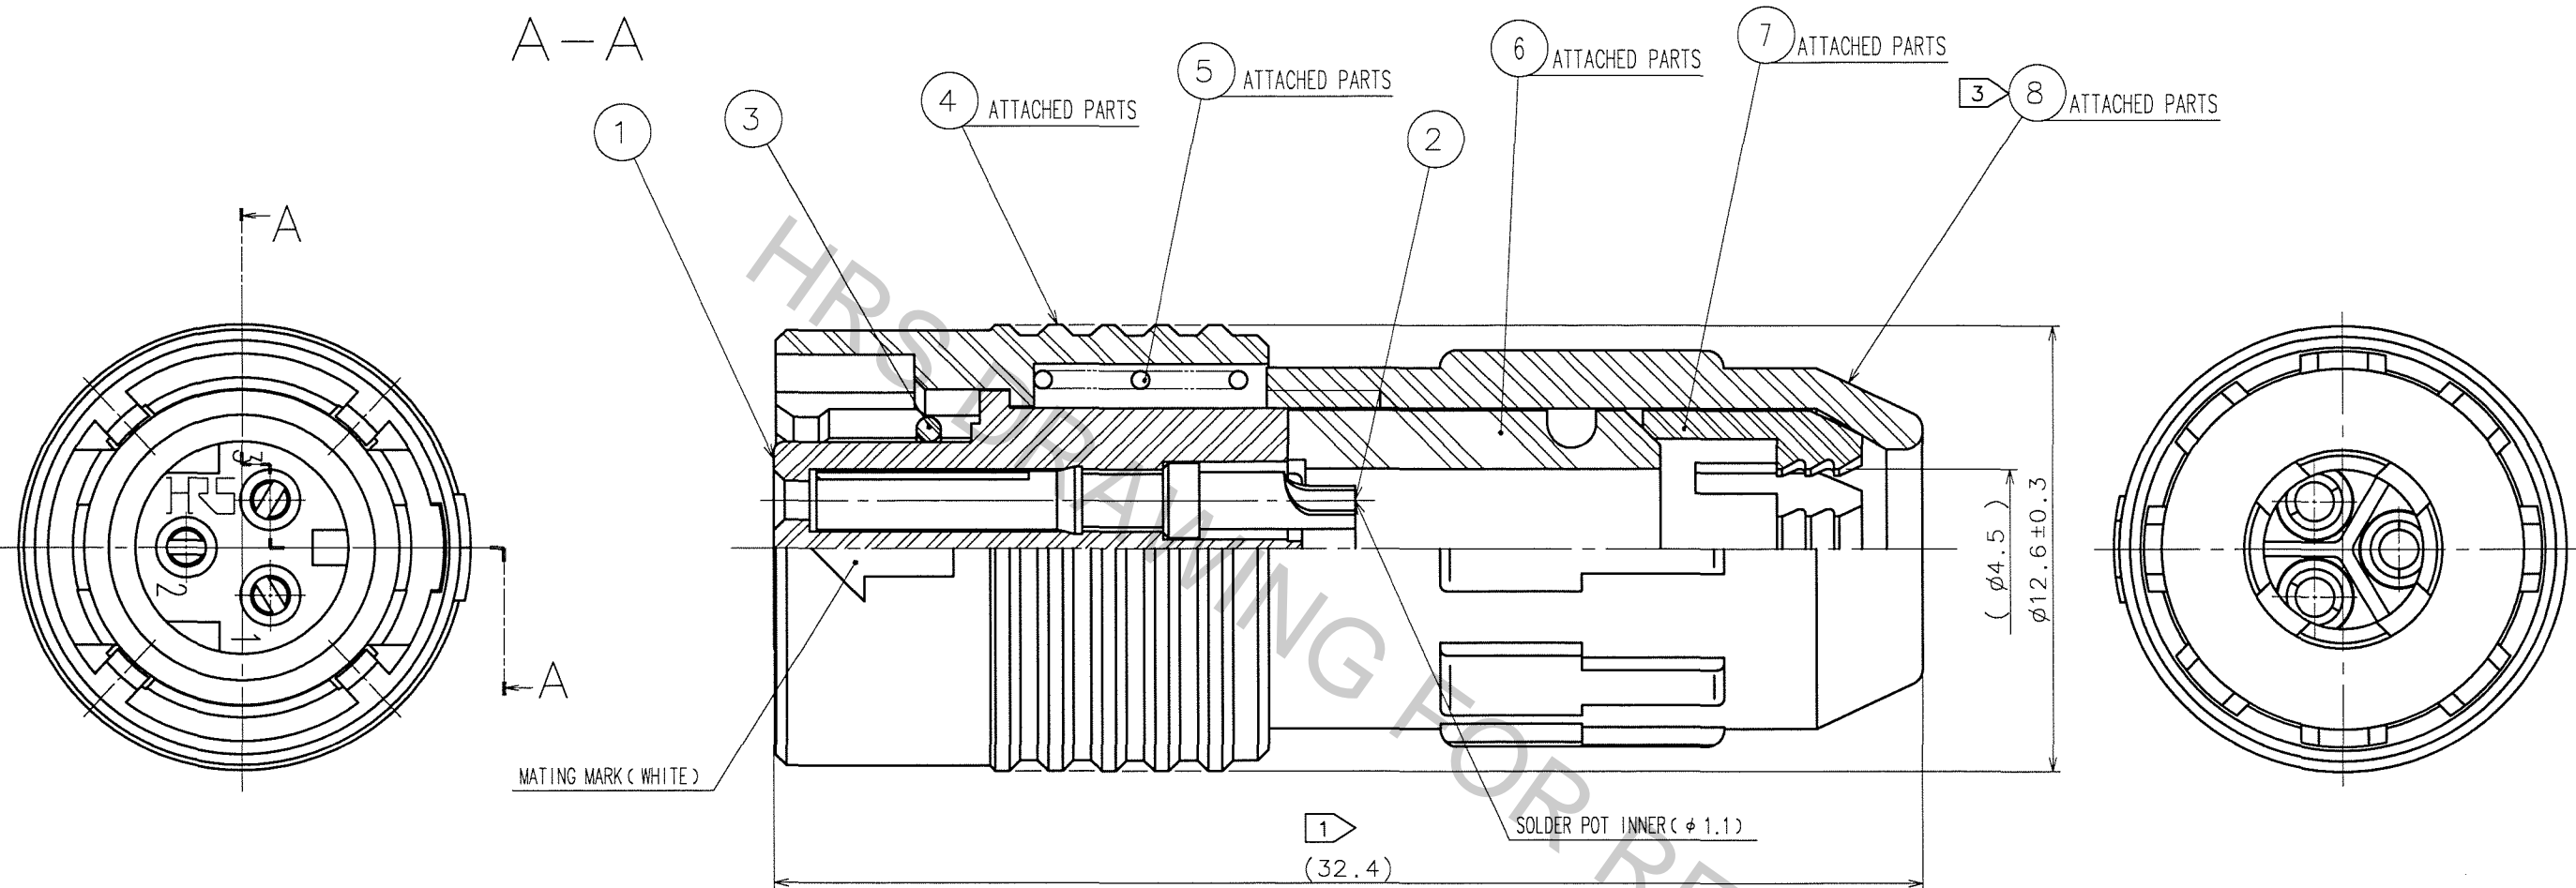

- NOTES
- ① TOTAL LENGTH BECOMES 29.8±1 WHEN ⑧ IS SCREWED INTO ① COMPLETELY.
  - ② TABLE FOR ASSEMBLY AND SOLDERING IS AVAILABLE HR30-6P-3S-T01.
  - ③ THE RECOMMENDED CLAMP TORQUE OF REF. NO.⑧ TO BE 0.5N·m.  
LOCTITE 271, LOCPRIMER 7649, HENKEL JAPAN IS RECOMMENDED TO PREVENT REF. NO.⑧ FROM LOOSENING.  
SPACER FOR ASSEMBLY IS AVAILABLE HR30-6P-T02.
  - ④ SURFACE PLATING : GOLD PLATING 0.2μ m min.  
UNDER PLATING : NICKEL PLATING 2μ m min.
  - ⑤ THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER,  
DEPENDING ON THE CABLE STRUCTURE.  
PLEASE CONFIRM BEFORE THE USE.

4	PBT	(BLACK)	UL94V-0	8	PBT	(BLACK)	UL94V-0
3	SIR	(RED)		7	POLYACETAL	(NATURAL)	
2	PHOSPHOR BRONZE	④		6	CR	(BLACK)	
1	PPS	(BLACK)	UL94V-0	5	STAINLESS STEEL		
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS	

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	E. KUNII	E. KUNII		M. SATO	
	'05.10.13	'05.10.13		'05.10.17	

SCALE	DRAWING NO.	PART NO.
5 : 1	EDC3-112569-71	HR30-6PA-3S(71)
UNITS	mm	CODE NO.
		CL130-0021-0-71

**HRS** HIROSE ELECTRIC CO., LTD

TO  
R