
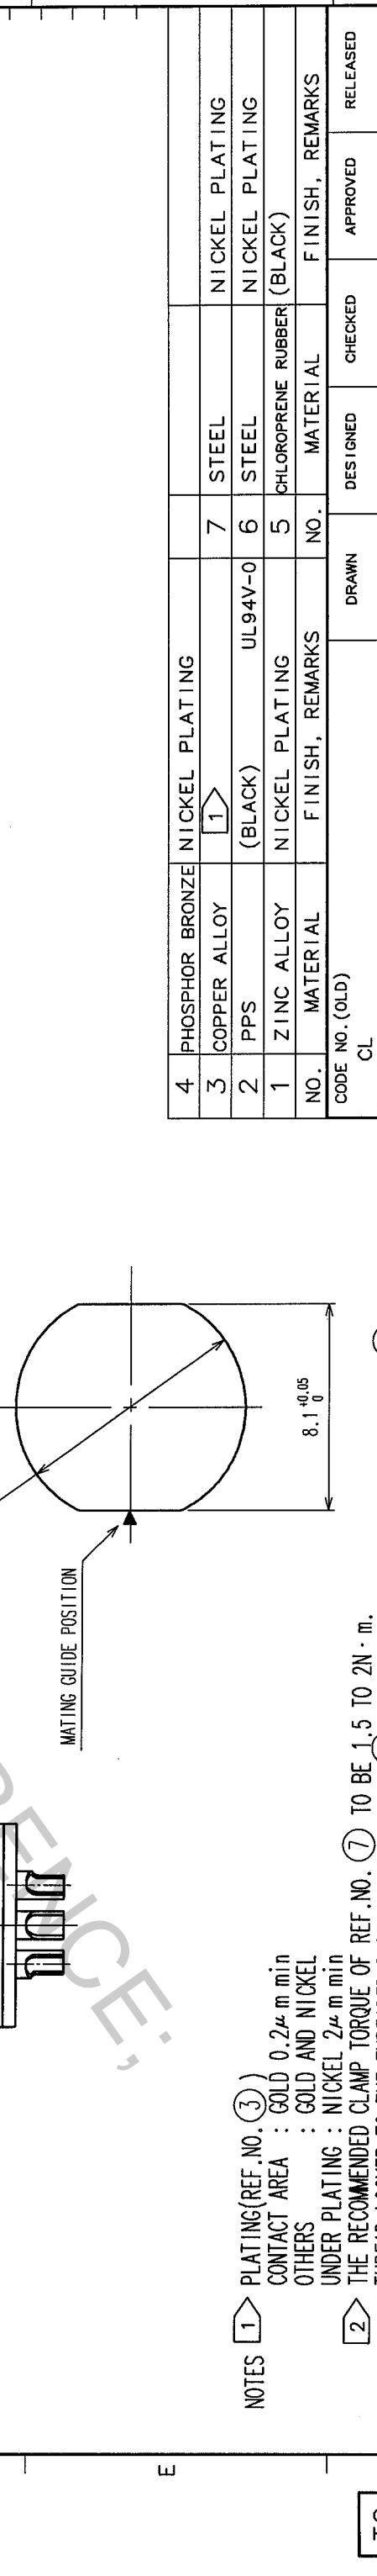
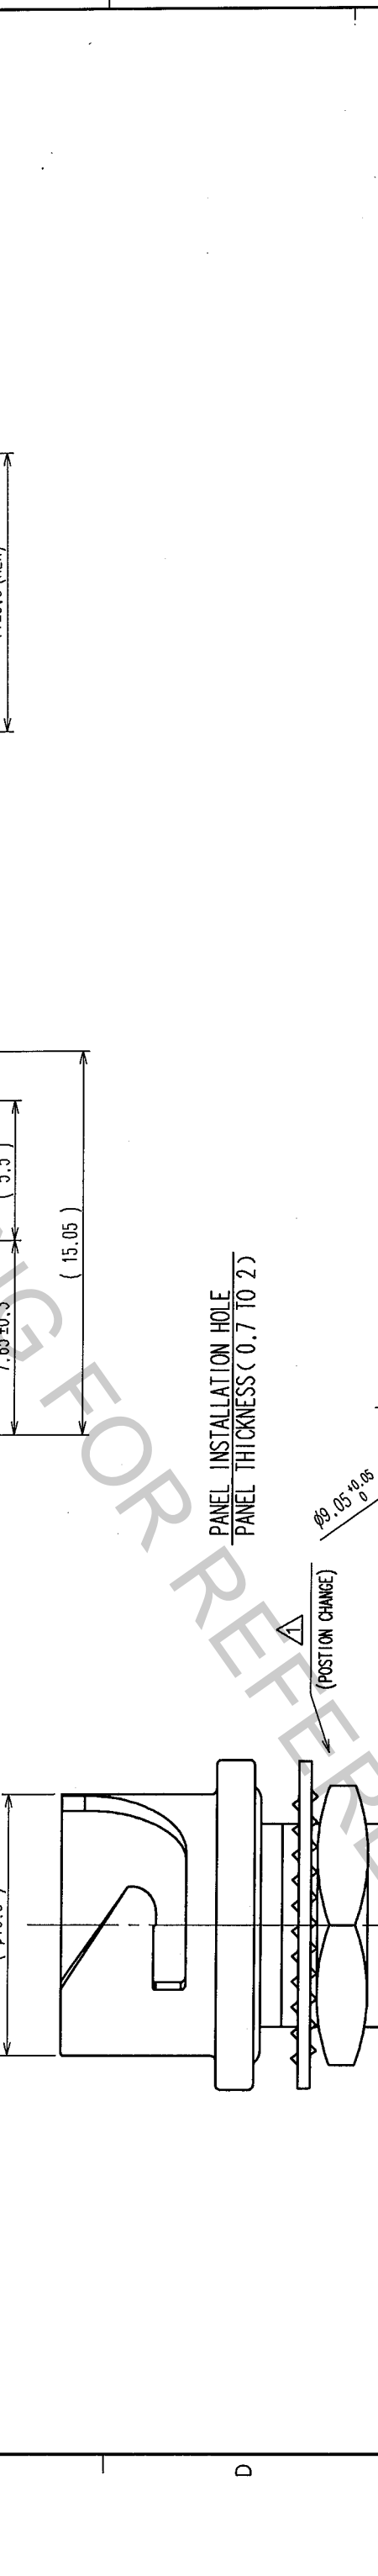


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
2	RE-C-03960	H.Z.	M.S.	04.12.1					

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

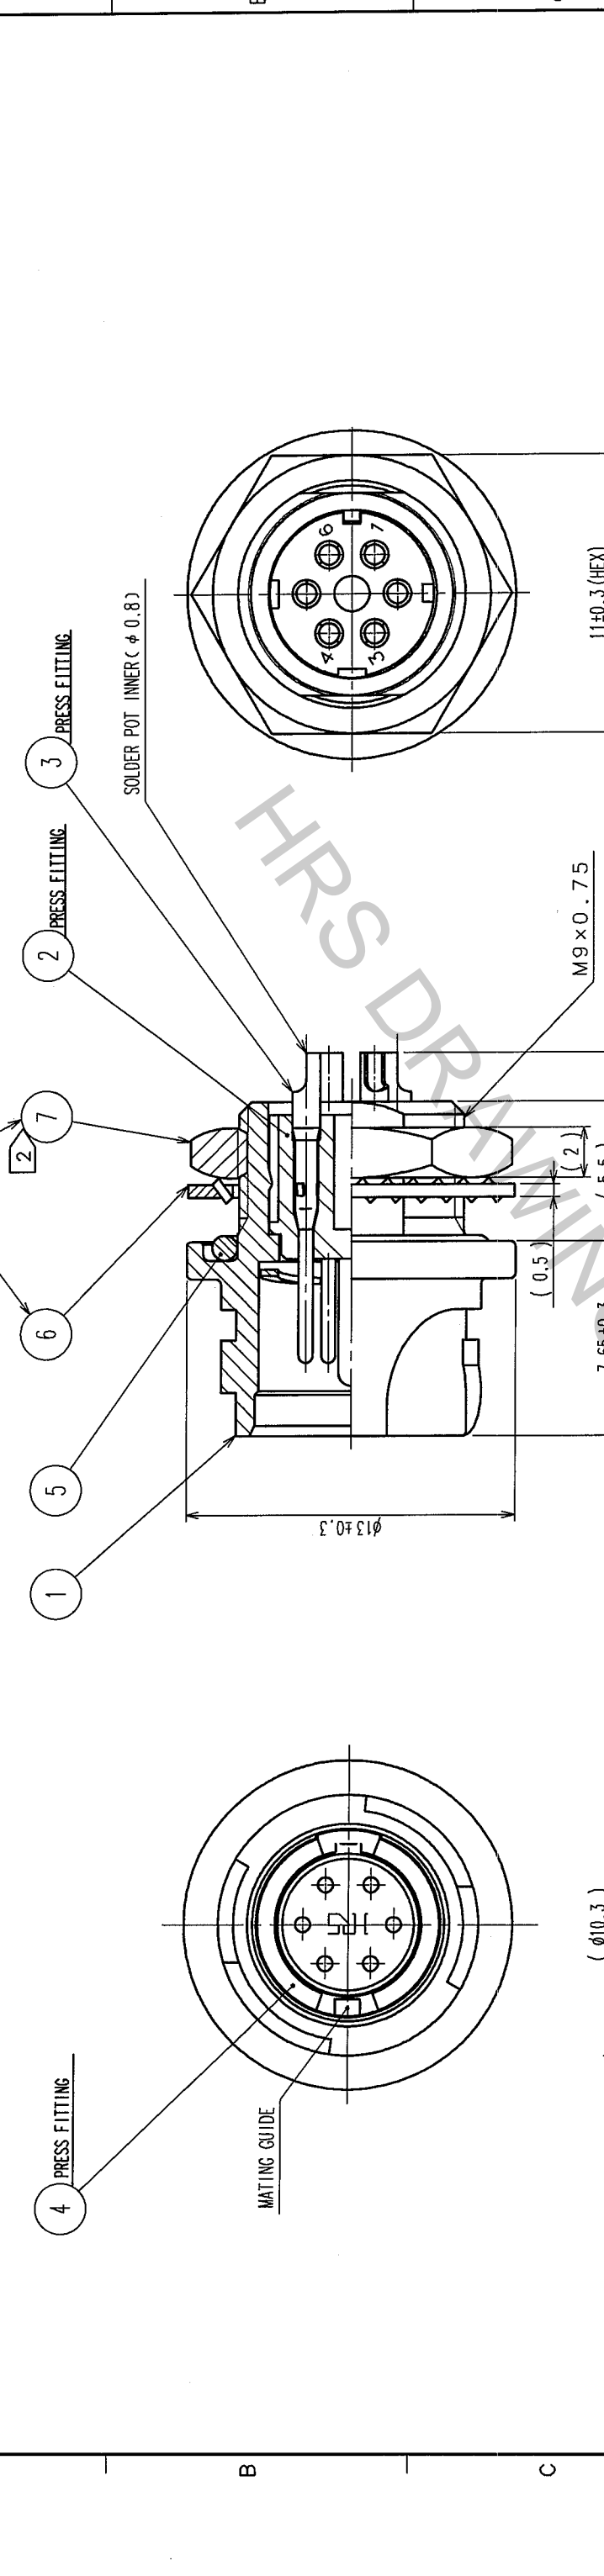

NOTES

1 PLATING(REF.NO. 3)  
 CONTACT AREA : GOLD 0.2μm min  
 OTHERS : GOLD AND NICKEL  
 UNDER PLATING : NICKEL 2μm min

2 THE RECOMMENDED CLAMP TORQUE OF REF.NO. 7 TO BE 1.5 TO 2N·m.  
 THREAD LOCKER TO THE THREADED PORTION OF REF.NO. 1 IS RECOMMENDED TO PREVENT REF.NO. 7 FROM LOOSING.  
 RECOMMENDED THREAD LOCKER:LOCTITE 271, HENKEL JAPAN LTD.  
 WHEN THIS CONNECTOR IS MOUNTED ON TO PANEL, BE CAREFUL REF.NO. 5 IS ASSEMBLED SURELY INTO THE GROOVE OF REF.NO. 1 AS SHOWN IN THIS FIGURE TO KEEP WATERPROOF EFFECTIVENESS.

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
4	PHOSPHOR BRONZE	NICKEL PLATING	7	STEEL	NICKEL PLATING
3	COPPER ALLOY	1 (BLACK)	6	STEEL	NICKEL PLATING
2	PPS	UL94V-0	5	CHLOROPRENE RUBBER	(BLACK)
1	ZINC ALLOY	NICKEL PLATING			

CODE NO. (OLD)	CL	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		H.Kawashimo	H.Zemba	M.Sato	M.Yoshida	
		04.06.08	04.08.29	04.08.31	04.09.01	

DRAWING NO.	PART NO.
EDC3-113836	LFO7WBR-6P

SCALE	UNITS	CODE NO.
4 : 1	mm	CL136-1001-7