
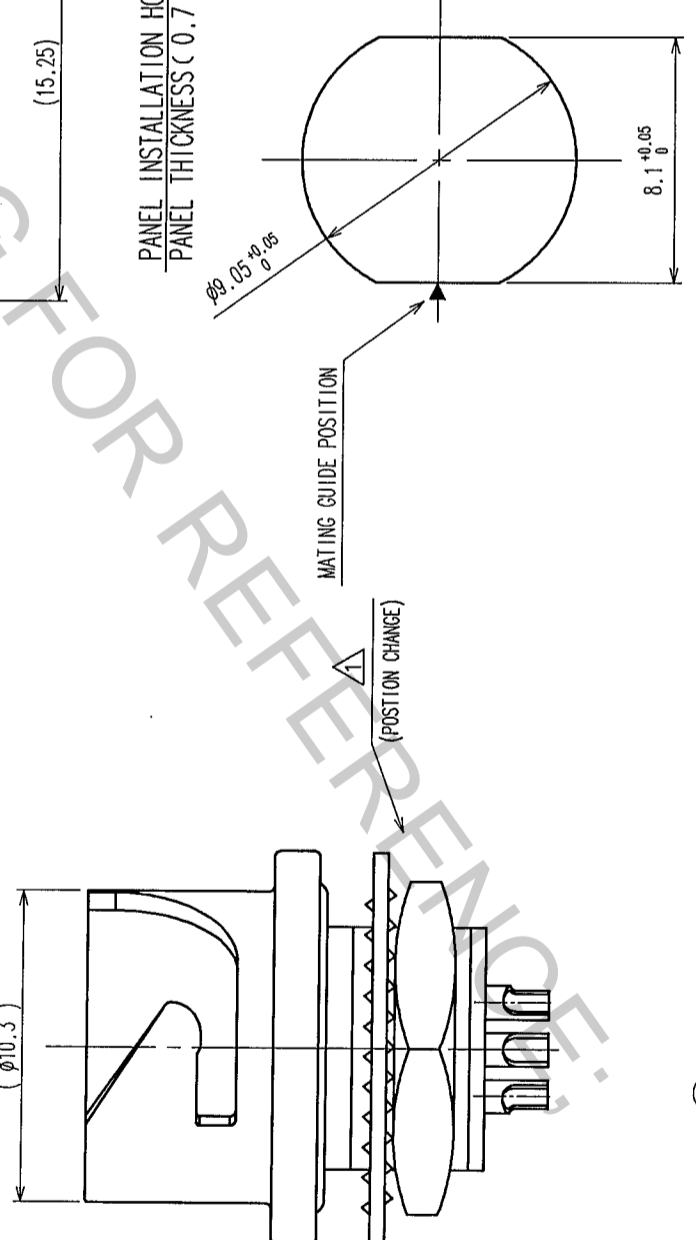


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
2	RE-C-03960	H.Z.	M.S.	04.12.1					

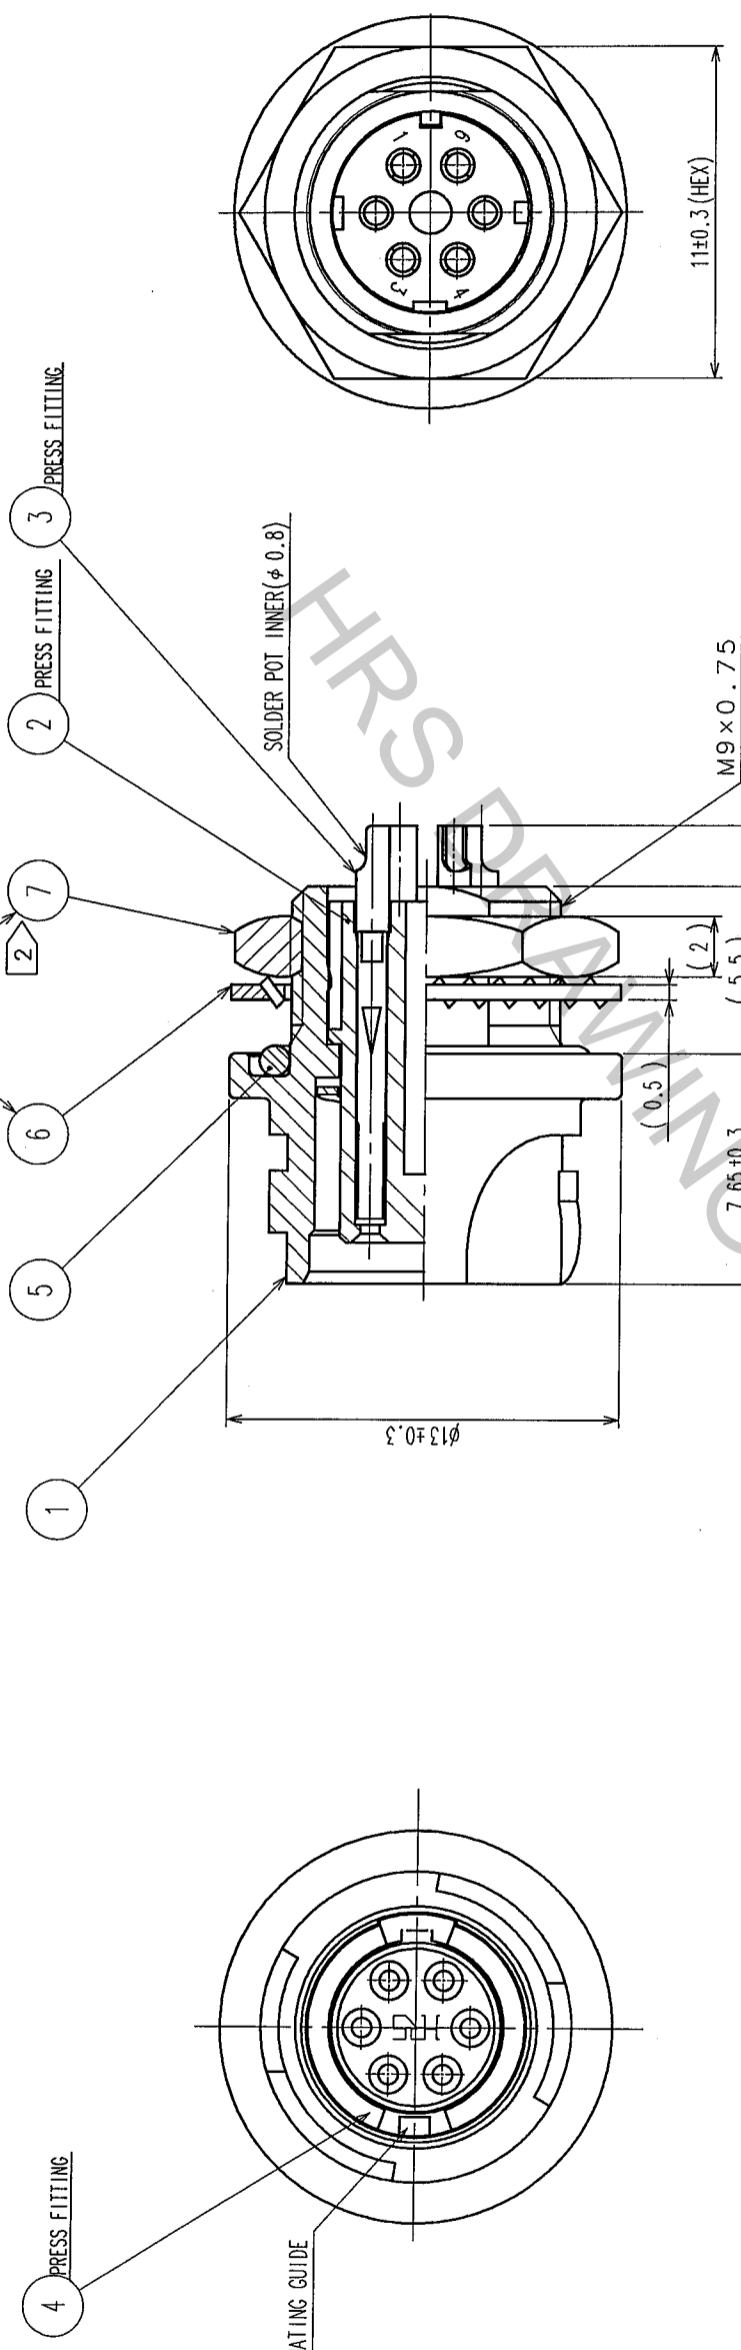

- NOTES
- PLATING (REF. NO. ③)
CONTACT AREA : GOLD 0.2 μ m min
OTHERS : GOLD AND NICKEL
 - UNDER PLATING : NICKEL 2 μ m min
THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑦ TO BE 1.5 TO 2N·m.
THREAD LOCKER TO THE THREADED PORTION OF REF. NO. ① IS RECOMMENDED TO PREVENT REF. NO. ⑦ FROM LOOSING.
RECOMMENDED THREAD LOCKER: LOCTITE 271, HENKEL JAPAN LTD.
 - WHEN THIS CONNECTOR IS MOUNTED ON TO PANEL, BE CAREFUL REF. NO. ⑤ IS ASSEMBLED SURELY INTO THE GROOVE OF REF. NO. ① AS SHOWN IN THIS FIGURE TO KEEP WATERPROOF EFFECTIVENESS.

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
4	PHOSPHOR BRONZE	NICKEL PLATING	7	STEEL	NICKEL PLATING
3	PHOSPHOR BRONZE	① (BLACK)	6	STEEL	NICKEL PLATING
2	PPS	UL94V-0	5	CHLOROPRENE RUBBER	(BLACK)
1	ZINC ALLOY	NICKEL PLATING			

CODE NO. (OLD)	CL	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		H. Kawashima	H. Zemba	M. Sato	M. Yoshida	
		04.05.24	04.05.28	04.05.31	04.05.31	

DRAWING NO.	PART NO.
EDC3-113851	LFO7WBR-6S

SCALE	UNITS	CODE NO.
4 : 1	mm	CL136-1002-0