


| 1 | | | 2 | | | 3 | | | 4 | | | | | |
|-------|--------------------------|-----|------|----------|-------|--------------------------|----|------|------|-------|--------------------------|----|------|------|
| COUNT | DESCRIPTION OF REVISIONS | BY | CHKD | DATE | COUNT | DESCRIPTION OF REVISIONS | BY | CHKD | DATE | COUNT | DESCRIPTION OF REVISIONS | BY | CHKD | DATE |
| 1 | DIS-C-000514 | T.K | E.K | 07.02.17 | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |

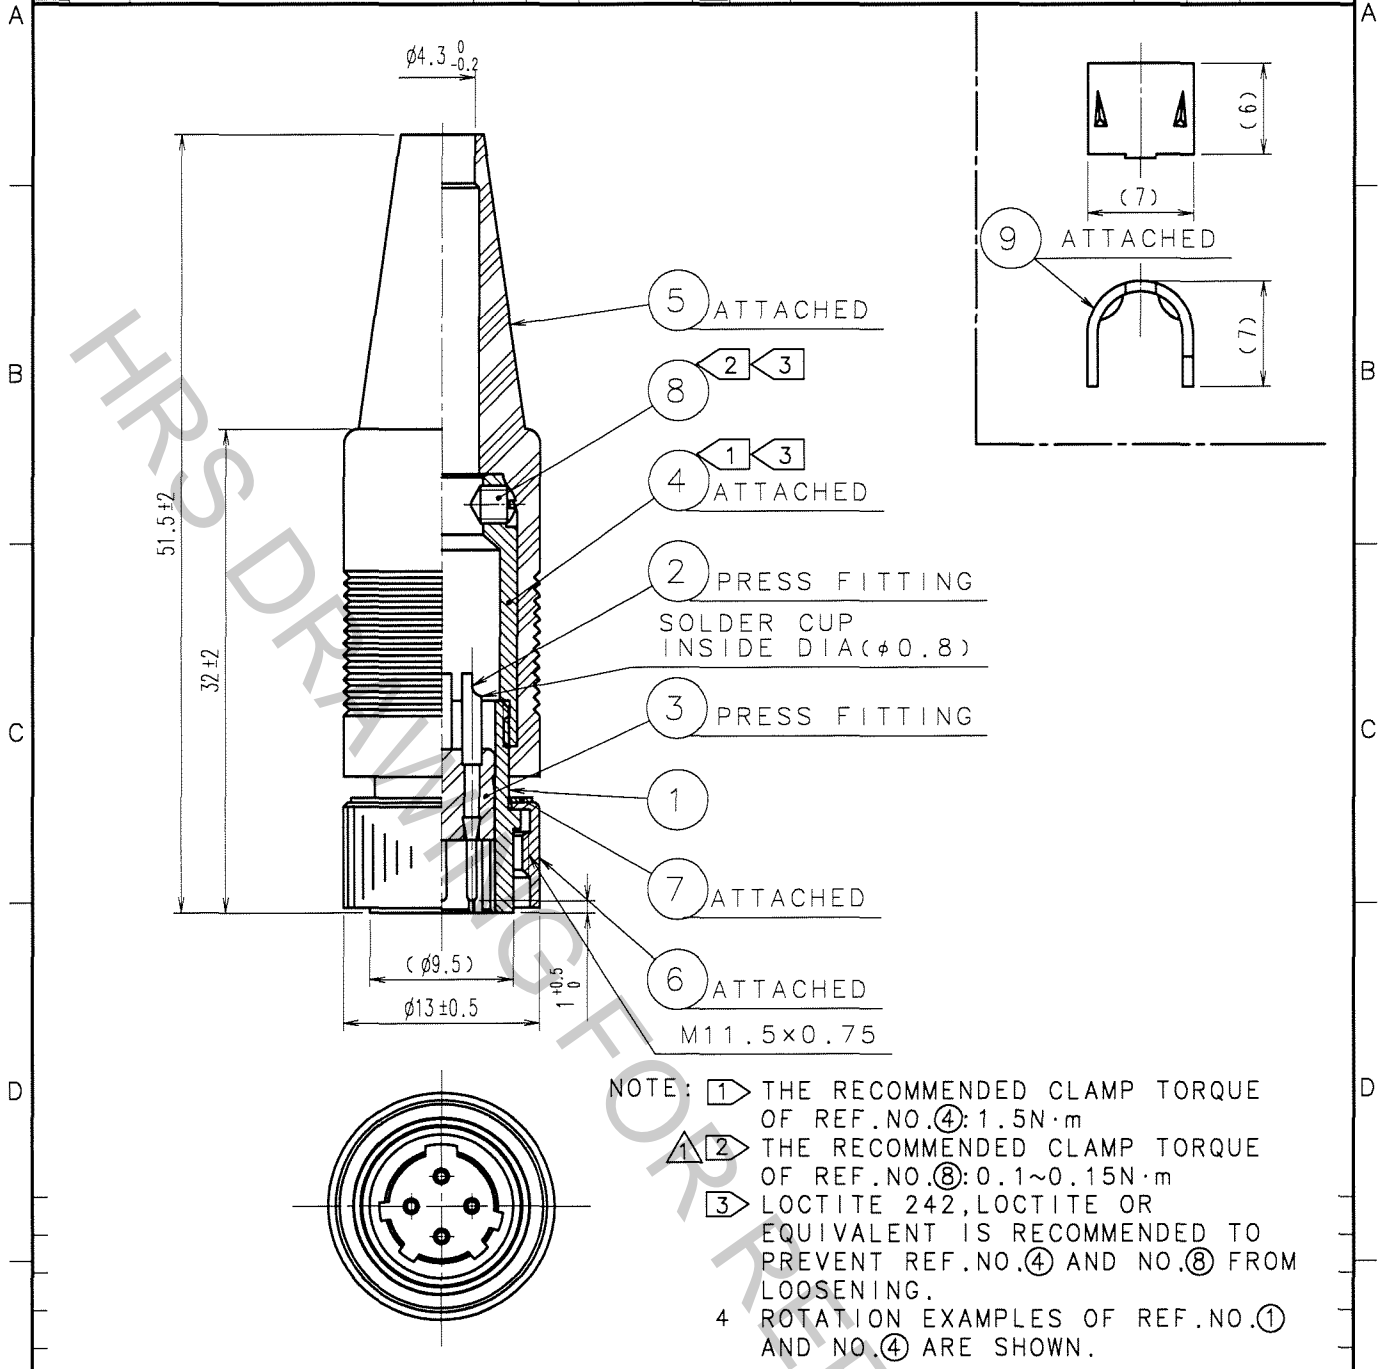

NOTE: ① THE RECOMMENDED CLAMP TORQUE OF REF.NO.④: 1.5N·m
 ② THE RECOMMENDED CLAMP TORQUE OF REF.NO.⑧: 0.1~0.15N·m
 ③ LOCTITE 242, LOCTITE OR EQUIVALENT IS RECOMMENDED TO PREVENT REF.NO.④ AND NO.⑧ FROM LOOSENING.
 4 ROTATION EXAMPLES OF REF.NO.① AND NO.④ ARE SHOWN.

| | | | | | |
|-----|------------|--|-----|----------|----------------------------|
| 5 | CR | (BLACK) | | | |
| 4 | BRASS | NICKEL PLATING | 9 | BRASS | |
| 3 | POLYACETAL | (WHITE) | 8 | STEEL | NICKEL PLATING M2.6x0.45x3 |
| 2 | BRASS | SURFACE PLATING: GOLD PLATING 0.2 μ m min. UNDER PLATING: NICKEL PLATING 3 μ m min. | 7 | BRASS | CHROME PLATING |
| 1 | ZINC ALLOY | NICKEL PLATING | 6 | BRASS | CHROME PLATING |
| NO. | MATERIAL | FINISH, REMARKS | NO. | MATERIAL | FINISH, REMARKS |

| | | | | | | |
|-------------------------------|--|----------|------------------------------|----------|----------|----------|
| CODE NO. (OLD) | | DRAWN | DESIGNED | CHECKED | APPROVED | RELEASED |
| | | E.YUMINO | E.YUMINO | H.ZEMBA | M.SATO | |
| | | 05.09.03 | 05.09.03 | 05.09.09 | 05.09.12 | |
| DRAWING NO. EDC4-006144-71 | | | PART NO. SR30-10PE-4P(71) | | | |
| CODE NO. CL103-0265-2-71 | | | 1/1 | | | |

| |
|----|
| TO |
| R |
| |
| |

| |
|----------------|
| |
| SCALE 2 : 1 |
| UNITS mm |

HRS HIROSE ELECTRIC CO., LTD.