

575-896



HP 34401A Multimeter

Uncompromising performance for benchtop and system testing

- Measure up to 1000 volts with 6 1/2 digits resolution
- dc accuracy of 0.0015%
- ac accuracy of 0.06%
- 3Hz to 300kHz ac bandwidth
- 1000 readings/sec. direct to HP-IB

Superior performance

The HP 34401A multimeter gives you the performance you need for fast, accurate bench and systems testing. The HP 34401A provides a combination of resolution, accuracy and speed that rivals DMMs costing many times more. A 6 1/2-digit display, 0.0015% Basic 24-hr dcV accuracy and 1,000 readings/sec direct to HP-IB assure you of results that are accurate, fast, and repeatable.

Use it on your benchtop

The HP 34401A was designed with your bench needs in mind. Functions commonly associated with pure bench operation, like continuity and diode test, are built in. A Null feature allows you to remove lead resistance or other fixed offsets in your measurements. Other capabilities like min/max/avg readouts and direct dB and dBm measurements make checkout with your DMM faster and easier.

When you want to store readings for future reference, the HP 34401A gives you the ability to store up to 512 readings in internal memory. For troubleshooting, a reading hold feature lets you concentrate on placing your test leads without having to constantly glance at the display.

Use it for systems testing


For systems use, the HP 34401A gives you faster bus throughput than any other DMM in its class. The HP 34401A can send up to 1,000 readings/sec directly across HP-IB in user-friendly ASCII format.

You also get both HP-IB and RS-232 interfaces as standard features. Voltmeter Complete and External Trigger signals are provided so you can synchronize to other instruments in your test system. In addition, a TTL output indicates Pass/Fail results when limit testing is used.

To ensure both forward and backward compatibility, the HP 34401A includes three command languages (SCPI, HP 3478A and Fluke 8840A /42A), so you don't have to rewrite your existing test software. An optional rack mount kit is available.

Easy to use

To save you time and trouble, all major functions, like selecting the function, range and number of digits, can be accessed on the front panel with one push of a button.

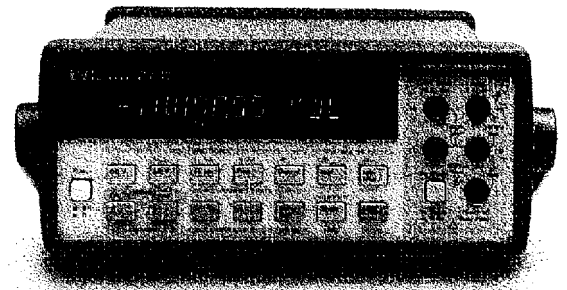

Advanced features are available using menu functions that let you optimize the HP 34401A for your applications.

To further increase your productivity, the HP 34401A can be used in conjunction with HP 34812A BenchLink Meter software. The Windows-based program lets you configure and initiate measurements from your computer, and transfer results from your test instrument to your PC. It even enables direct temperature measurements with the HP 34401A and an RTD or thermistor probe. HP BenchLink Meter also lets you create graphs, charts and histograms to help you evaluate results.

3-year warranty



With your HP 34401A, you get full documentation, a high-quality test lead set, calibration certificate with test data, and a 3-year warranty, all for one low price.

Accuracy Specifications ± (% of reading + % of range) ^[1]

Function	Range ^[3]	Frequency, etc.	24 Hour ^[2] 23°C ± 1°C	90 Day 23°C ± 5°C	1 Year 23°C ± 5°C	Temperature Coefficient 0°C – 18°C 28°C – 55°C	
dc Voltage	100.0000 mV		0.0030 + 0.0030	0.0040 + 0.0035	0.0050 + 0.0035	0.0005 + 0.0005	
	1.000000 V		0.0020 + 0.0006	0.0030 + 0.0007	0.0040 + 0.0007	0.0005 + 0.0001	
	10.00000 V		0.0015 + 0.0004	0.0020 + 0.0005	0.0035 + 0.0005	0.0005 + 0.0001	
	100.0000 V		0.0020 + 0.0006	0.0035 + 0.0006	0.0045 + 0.0006	0.0005 + 0.0001	
	1000.000 V		0.0020 + 0.0006	0.0035 + 0.0010	0.0045 + 0.0010	0.0005 + 0.0001	
True rms ac Voltage ^[4]	100.0000 mV	3 Hz - 5 Hz	1.00 + 0.03	1.00 + 0.04	1.00 + 0.04	0.100 + 0.004	
		5 Hz - 10 Hz	0.35 + 0.03	0.35 + 0.04	0.35 + 0.04	0.035 + 0.004	
		10 Hz - 20 kHz	0.04 + 0.03	0.05 + 0.04	0.06 + 0.04	0.005 + 0.004	
		20 kHz - 50 kHz	0.10 + 0.05	0.11 + 0.05	0.12 + 0.04	0.011 + 0.005	
		50 kHz - 100 kHz ^[6]	0.55 + 0.08	0.60 + 0.08	0.60 + 0.08	0.060 + 0.008	
		100 kHz - 300 kHz ^[6]	4.00 + 0.50	4.00 + 0.50	4.00 + 0.50	0.20 + 0.02	
	1.000000 V to 750.000 V	3 Hz - 5 Hz	1.00 + 0.02	1.00 + 0.03	1.00 + 0.03	1.00 + 0.03	0.100 + 0.003
		5 Hz - 10 Hz	0.35 + 0.02	0.35 + 0.03	0.35 + 0.03	0.35 + 0.03	0.035 + 0.003
		10 Hz - 20 kHz	0.04 + 0.02	0.05 + 0.03	0.06 + 0.03	0.06 + 0.03	0.005 + 0.003
		20 kHz - 50 kHz ^[5]	0.10 + 0.04	0.11 + 0.05	0.12 + 0.05	0.11 + 0.05	0.011 + 0.005
50 kHz - 100 kHz ^[5]		0.55 + 0.08	0.60 + 0.08	0.60 + 0.08	0.60 + 0.08	0.060 + 0.008	
	100 kHz - 300 kHz ^[6]	4.00 + 0.50	4.00 + 0.50	4.00 + 0.50	0.20 + 0.02		
Resistance ^[7]	100.0000 Ω	1 mA Current Source	0.0030 + 0.0030	0.008 + 0.004	0.010 + 0.004	0.0006 + 0.0005	
	1.000000 kΩ	1 mA	0.0020 + 0.0005	0.008 + 0.001	0.010 + 0.001	0.0006 + 0.0001	
	10.00000 kΩ	100 μA	0.0020 + 0.0005	0.008 + 0.001	0.010 + 0.001	0.0006 + 0.0001	
	100.0000 kΩ	10 μA	0.0020 + 0.0005	0.008 + 0.001	0.010 + 0.001	0.0006 + 0.0001	
	1.000000 MΩ	5.0 μA	0.002 + 0.001	0.008 + 0.001	0.010 + 0.001	0.0010 + 0.0002	
	10.00000 MΩ	500 nA	0.015 + 0.001	0.020 + 0.001	0.040 + 0.001	0.0030 + 0.0004	
	100.0000 MΩ	500 nA 10MΩ	0.300 + 0.010	0.800 + 0.010	0.800 + 0.010	0.1500 + 0.0002	
dc Current	10.00000 mA	<0.1 V Burden Voltage	0.005 + 0.010	0.030 + 0.020	0.050 + 0.020	0.002 + 0.0020	
	100.0000 mA	<0.6 V	0.010 + 0.004	0.030 + 0.005	0.050 + 0.005	0.002 + 0.0005	
	1.000000 A	<1 V	0.050 + 0.006	0.080 + 0.010	0.100 + 0.010	0.005 + 0.0010	
	3.00000 A	<2 V	0.100 + 0.020	0.120 + 0.020	0.120 + 0.020	0.005 + 0.0020	
True rms ac Current ^[4]	1.000000 A	3 Hz - 5 Hz	1.00 + 0.04	1.00 + 0.04	1.00 + 0.04	0.100 + 0.006	
		5 Hz - 10 Hz	0.30 + 0.04	0.30 + 0.04	0.30 + 0.04	0.035 + 0.006	
		10 Hz - 5 kHz	0.10 + 0.04	0.10 + 0.04	0.10 + 0.04	0.015 + 0.006	
	3.00000 A	3 Hz - 5 Hz	1.10 + 0.06	1.10 + 0.06	1.10 + 0.06	0.100 + 0.006	
		5 Hz - 10 Hz	0.35 + 0.06	0.35 + 0.06	0.35 + 0.06	0.035 + 0.006	
		10 Hz - 5 kHz	0.15 + 0.06	0.15 + 0.06	0.15 + 0.06	0.015 + 0.006	
Frequency or Period ^[8]	100 mV	3 Hz - 5 Hz	0.10	0.10	0.10	0.005	
	to	5 Hz - 10 Hz	0.05	0.05	0.05	0.005	
	750 V	10 Hz - 40 Hz	0.03	0.03	0.03	0.001	
		40 Hz - 300 kHz	0.006	0.01	0.01	0.001	
Continuity	1000.0 Ω	1 mA Test Current	0.002 + 0.010	0.008 + 0.020	0.010 + 0.020	0.001 + 0.002	
Diode Test	1.0000 V	1 mA Test Current	0.002 + 0.010	0.008 + 0.020	0.010 + 0.020	0.001 + 0.002	

[1] Specifications are for 1 hr warm-up and 6 1/2 digits, Slow ac filter.
 [2] Relative to calibration standards.
 [3] 20% over range on all ranges except 1000 V dc and 750 V ac ranges.
 [4] For sinewave input > 5% of range. For inputs from 1% to 5% of range and < 50 kHz, add 0.1% of range additional error.

[5] 750 V range limited to 100 kHz or 8 x 10⁷ Volt-Hz.
 [6] Typically 30% of reading error at 1 MHz.
 [7] Specifications are for 4-wire ohms function or 2-wire ohms using Math Null. Without Math Null, add 0.2 Ω additional error in 2-wire ohms function.
 [8] Input > 100 mV. For 10 mV inputs multiply % of reading error x10.



Measurement Characteristics

dc Voltage	
Measurement Method	Continuously Integrating Multi-slope III A-D Converter
A-D Linearity	0.0002% of reading + 0.0001 % of range
Input Resistance	
0.1V, 1V, 10 V ranges	Selectable 10 M Ω or >10,000 M Ω
100 V, 1000 V ranges	10 M Ω \pm 1%
Input Bias Current	< 30pA at 25° C
Input Protection	1000 V all ranges
dcV:dcV Ratio Accuracy	V_{input} Accuracy + $V_{reference}$ Accuracy

True rms ac Voltage

Measurement Method	
ac coupled True rms – measures the ac component of the input with up to 400 Vdc of bias on any range.	
Crest Factor	
Maximum of 5:1 at Full Scale	
Additional Crest Factor Errors (non-sinewave)	
Crest Factor	1–2 0.05 % of reading
Crest Factor	2–3 0.15 % of reading
Crest Factor	3–4 0.30 % of reading
Crest Factor	4–5 0.40 % of reading
Input Impedance	
1 M Ω \pm 2% in parallel with 100 pF	
Input Protection	
750Vrms all ranges	

Resistance

Measurement Method	
Selectable 4-wire or 2-wire Ohms. Current source referenced to LO input.	
Maximum Lead Resistance (4-wire)	10% of range per lead for 100 Ω and 1k Ω ranges. 1k Ω per lead on all other ranges.
Input Protection	
1000 V all ranges	

dc Current

Shunt Resistance	
5 Ω for 10 mA, 100 mA; 0.1 Ω for 1 A, 3 A.	
Input Protection	
Externally accessible 3 A 250 V Fuse Internal 7 A 250 V Fuse	

True rms ac Current

Measurement Method	
Direct coupled to the fuse and shunt. ac coupled True rms measurement (measures the ac component only).	
Shunt Resistance	
0.1 Ω for 1 A and 3 A ranges	
Input Protection	
Externally accessible 3 A 250 V Fuse Internal 7 A 250 V Fuse	

Frequency and Period

Measurement Method	
Reciprocal counting technique	
Voltage Ranges	
Same as ac Voltage Function	
Gate Time	
1 s, 100 ms, or 10 ms.	

Continuity / Diode

Response Time	
300 samples/s with audible tone	
Continuity Threshold	
Selectable from 1 Ω to 1000 Ω	

Measurement Noise Rejection 60 (50) Hz ^[1]

dc CMRR	140 dB
ac CMRR	70 dB

Integration Time

100 plc / 1.67 s (2 s)	Normal Mode Rejection ^[2]
10 plc / 167 ms (200 ms)	60 dB ^[3]
1 plc / 16.7 ms (20 ms)	60 dB ^[3]
<1 plc / 3 ms or 800 μ s	60 dB
	0 dB

Operating Characteristics ^[4]

Function	Digits	Readings/s	
dcV, dcI, and Resistance	6 1/2	0.6 (0.5)	
	6 1/2	6 (5)	
	5 1/2	60 (50)	
	5 1/2	300	
	4 1/2	1000	
acV, acI	6 1/2	0.15	Slow (3 Hz)
	6 1/2	1	Medium (20 Hz)
	6 1/2	10	Fast (200 Hz)
	6 1/2	50 ^[5]	
Frequency or Period	6 1/2	1	
	5 1/2	9.8	
	4 1/2	80	

System Speeds ^[6]

Configuration Rates	26/s to 50/s
Autorange Rate (dc Volts)	> 30/s
ASCII readings to RS-232	55/s
ASCII readings to HP-IB	1000/s
Maximum Internal Trig. Rate	1000/s
Max. Ext. Trig. Rate to Memory	1000/s

Triggering and Memory

Reading HOLD Sensitivity	10%, 1%, 0.1%, or 0.01% of range
Samples/ trigger	1 to 50,000
Trigger Delay	0 to 3600 s: 10 μ s step size
External Trigger Delay	< 1 ms
External Trigger Jitter	< 500 μ s
Memory	512 readings

Math Functions

NULL, Min/Max/Average, dBm, dB, Limit Test (with TTL output)

Standard Programming Languages

SCPI (IEEE-488.2), HP 3478A, Fluke 8840A/42A

Accessories Included

Test Lead Kit with probe, alligator, and grabber attachments.
Operating Manual, Service Manual, test report, and power cord.

General Specifications

Power Supply	100 V/120 V/220 V/240 V \pm 10%
Power Line Frequency	45 Hz to 66 Hz and 360 Hz to 440 Hz Automatically sensed at power-on.
Power Consumption	25 VA peak (10W average)
Operating Environment	Full accuracy for 0° C to 55° C Full accuracy to 80% R.H. at 30° C
Storage Environment	-40° C to 75° C
Weight	3 kg (6.5 lbs)
Safety	Designed to CSA, UL-1244, IEC-348
RFI and ESD	MIL-461C, FTZ 1046, FCC
Vibration and Shock	MIL-T-28800E, Type III, Class 5 (Sine Only)
Warranty	3 years

^[1] For 1 k Ω unbalance in LO lead.

^[2] For power line frequency \pm 0.1%.

^[3] For power line frequency \pm 1% use 40 dB or \pm 3% use 30 dB.

^[4] Reading speeds for 60 Hz and (50 Hz) operation.

^[5] Maximum useful limit with default settling delays defeated.

^[6] Speeds are for 4 1/2 digits, Delay 0, Auto-zero and Display OFF.

Ordering Information

HP 34401A Multimeter

Accessories included

Test Lead Kit with probe, alligator, and grabber attachments, operating manual, service manual, calibration certificate, test report, and power cord.

Options

Opt. 908 Rack Mount Kit* (P/N 5062-3972)

Opt. 910 Extra manual set (English)

Opt. W50 Additional 2-year warranty (5-year total)

Opt. 1BP MIL-STD-45662A calibration with data

Manual options (please specify one)

ABA US English

ABD German

ABE Spanish

ABF French

ABJ Japanese

ABZ Italian

ABO Taiwan Chinese

AB1 Korean

Accessories

HP 11059A Kelvin Probe set

HP 11060A Surface Mount Device (SMD) test probes

HP 11062A Kelvin clip set

HP 34130 Deluxe test lead set

HP 34161A accessory pouch

HP 34300A 40 kV ac/dc high voltage probe

HP 34301A 700 MHz RF probe

HP 34302A Clamp-on ac/dc current probe (100 A)

HP 34330A 30 A current shunt

HP 34812A BenchLink Meter software

* For racking two side-by-side, order both items below

Lock link kit (P/N 5061-9694)

Flange kit (P/N 5062-3974)

HP BenchLink is a trademark of Hewlett-Packard Company.
Windows is a trademark of Microsoft Corporation.