

## Rec&Play 2 Click



PID: MIKROE-6167

Rec&Play 2 Click is a compact add-on board for voice recording and playback applications. It is based on the ISD1616B, a single-message voice record and playback IC from Nuvoton. The board features an on-chip oscillator, a microphone preamplifier with Automatic Gain Control (AGC), an omnidirectional microphone, and a speaker driver for high-quality audio recording and playback. Voice data is stored in onboard Flash memory without digital compression, ensuring clear and reliable sound. It supports both manual and digital control, as well as flexible message durations from 10 to 24 seconds. This Click board™ is ideal for applications such as alarms, voice prompts, and automated announcements where reliable audio performance is crucial.

### How does it work?

Rec&Play 2 Click is based on the ISD1616B, a single-message voice record and playback IC from Nuvoton designed for voice recording and playback applications. This highly integrated solution includes all the necessary components to deliver superior audio recording and playback functionality. It features an on-chip oscillator, a microphone preamplifier with Automatic Gain Control (AGC), and an omnidirectional electret microphone ([CMC-2242PBL-A](#)) for optimal audio capture. The built-in anti-aliasing filter ensures smooth, high-quality recording, while the Multi-Level Storage (MLS) array provides efficient data handling. Voice and audio data are stored directly in the onboard Flash memory without digital compression, ensuring high-quality playback. A smoothing filter and Pulse Width Modulation (PWM) Class D speaker driver control the integrated speaker ([AS01508AO-SC-R](#)), delivering clear and precise audio output. With zero-power message storage, recordings remain intact even without a power supply. Rec&Play 2 Click is ideal for various audio playback applications, including alarms, voice prompts, and automated announcements, where clear and reliable audio is

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.




ISO 27001: 2013 certification of informational security management system.  
 ISO 14001: 2015 certification of environmental management system.  
 OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

essential.

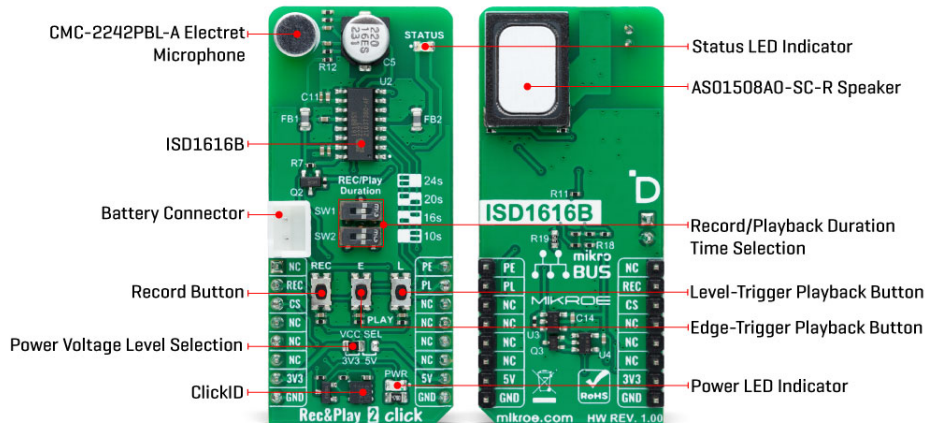

The ISD1616B can be managed both manually and digitally. Manual control is available through dedicated buttons: REC, E, and L. The REC button enables voice recording, which continues as long as the button remains pressed. The E and L buttons handle playback, offering two distinct modes: the E button is used for edge-trigger playback, while the L button is for level-trigger playback. In edge-trigger playback mode, pressing the E button for longer than the specified debounce time initiates playback from the beginning of the memory, continuing until an End-Of-Message (EOM) marker is reached, after which the device automatically enters standby mode. In level-trigger playback mode, pressing the L button starts playback from the beginning of the memory, and it runs until an EOM marker is reached, then powers down automatically. These same functions can also be controlled digitally via the REC, PE, and PL pins on the mikroBUS™ socket.

The message duration is user-selectable, ranging from 10 to 24 seconds, depending on the configuration of the onboard REC/Play Duration switches. In addition to these switches, the board features a visual guide to indicate the switch positions and corresponding recording/playback durations of 10, 16, 20, or 24 seconds. It also includes an orange status LED indicator, which stays illuminated during recording and blinks several times per second during playback, providing visual feedback on the operation status.

This Click board™ can operate with either 3.3V or 5V logic voltage levels selected via the VCC SEL jumper. This way, both 3.3V and 5V capable MCUs can use the communication lines properly. It also supports battery power, enabling standalone applications without needing an external power supply. Additionally, this Click board™ comes equipped with a library containing easy-to-use functions and an example code that can be used as a reference for further development.

## Specifications

|                  |   |
|------------------|---|
| Type             | Speakers  |
| Applications     | Ideal for applications such as alarms, voice prompts, and automated announcements where reliable audio performance is crucial |
| On-board modules | ISD1616B - single-message voice record and playback IC from Nuvoton   |

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
 ISO 14001: 2015 certification of environmental management system.  
 OHSAS 18001: 2008 certification of occupational health and safety management system.




ISO 9001: 2015 certification of quality management system (QMS).

|                  |  |
|------------------|--|
| Key Features     | High-quality voice recording and playback, on-chip microphone preamplifier with Automatic Gain Control (AGC), omnidirectional electret microphone, Multi-Level Storage (MLS) array, onboard speaker, selectable message duration, manual and digital control, and more |
| Interface        | GPIO   |
| Feature          | ClickID  |
| Compatibility    | mikroBUS™  |
| Click board size | L (57.15 x 25.4 mm)  |
| Input Voltage    | 3.3V or 5V, External   |

## Pinout diagram

This table shows how the pinout on Rec&Play 2 Click corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

| Notes          | Pin         |  |      |     |    | Pin        | Notes                          |
|----------------|-------------|---|------|-----|----|------------|--------------------------------|
|                | NC          | 1   | AN   | PWM | 16 | <b>PE</b>  | Edge-Trigger Playback Control  |
| Record Control | <b>REC</b>  | 2   | RST  | INT | 15 | <b>PL</b>  | Level-Trigger Playback Control |
| ID COMM        | <b>CS</b>   | 3   | CS   | RX  | 14 | NC         |                                |
|                | NC          | 4   | SCK  | TX  | 13 | NC         |                                |
|                | NC          | 5   | MISO | SCL | 12 | NC         |                                |
|                | NC          | 6   | MOSI | SDA | 11 | NC         |                                |
| Power Supply   | <b>3.3V</b> | 7   | 3.3V | 5V  | 10 | <b>5V</b>  | Power Supply                   |
| Ground         | <b>GND</b>  | 8   | GND  | GND | 9  | <b>GND</b> | Ground                         |

## Onboard settings and indicators

| Label   | Name              | Default | Description  |
|---------|-------------------|---------|--|
| LD1     | PWR               | -       | Power LED Indicator  |
| LD2     | STATUS            | -       | Status LED Indicator   |
| JP1     | VCC SEL           | Left    | Power Voltage Level Selection 3V3/5V: Left position 3V3, Right position 5V |
| T1      | REC               | -       | Record Control Button  |
| T2      | L                 | -       | Level-Trigger Playback Control Button                                      |
| T3      | E                 | -       | Edge-Trigger Playback Control Button                                       |
| SW1-SW2 | REC/Play Duration | Right   | Record/Playback Duration Time Switches                                     |

## Rec&Play 2 Click electrical specifications

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
 ISO 14001: 2015 certification of environmental management system.  
 OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

| Description                   | Min | Typ | Max | Unit |
|-------------------------------|-----|-----|-----|------|
| Supply Voltage                | 3.3 | -   | 5   | V    |
| Record/Playback Duration Time | 10  | -   | 24  | sec  |

## Software Support

We provide a library for the Rec N Play 2 Click as well as a demo application (example), developed using MIKROE [compilers](#). The demo can run on all the main MIKROE [development boards](#).

Package can be downloaded/installed directly from NECTO Studio Package Manager (recommended), downloaded from our [LibStock™](#) or found on [MIKROE github account](#).

## Library Description

This library contains API for Rec N Play 2 Click driver.

Key functions

- `recnplay2_set_pl_pin` This function sets the PL pin on the selected level of Rec N Play 2 click board.
- `recnplay2_record_sound` This function is used to record sound with Rec N Play 2 click board.
- `recnplay2_play_sound` This function is used to play recorded sounds with Rec N Play 2 click board.

## Example Description

This example demonstrates the use of Rec N Play 2 Click by recording and then playing recorded sound.

The full application code, and ready to use projects can be installed directly from NECTO Studio Package Manager (recommended), downloaded from our [LibStock™](#) or found on [MIKROE github account](#).

Other MIKROE Libraries used in the example:

- MikroSDK.Board
- MikroSDK.Log
- Click.RecNPlay2

## Additional notes and informations

Depending on the development board you are using, you may need [USB UART click](#), [USB UART 2 Click](#) or [RS232 Click](#) to connect to your PC, for development systems with no UART to USB interface available on the board. UART terminal is available in all MIKROE [compilers](#).

## mikroSDK

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
 ISO 14001: 2015 certification of environmental management system.  
 OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

This Click board™ is supported with [mikroSDK](#) - MIKROE Software Development Kit. To ensure proper operation of mikroSDK compliant Click board™ demo applications, mikroSDK should be downloaded from the [LibStock](#) and installed for the compiler you are using.

For more information about mikroSDK, visit the [official page](#).

## Resources

[mikroBUS™](#)

[mikroSDK](#)

[Click board™ Catalog](#)

[Click boards™](#)

[ClickID](#)

## Downloads

[Rec&Play 2 click example on Libstock](#)

[Rec&Play 2 click 2D and 3D files v100](#)

[ISD1616B datasheet](#)

[Rec&Play 2 click schematic v100](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).