

# Toggle Switch

## Solder Lug Terminals



### Specifications:


Contact Rating	: 5Amps with resistant load at 120V AC or 28V DC 2A with resistant load at 250V AC 0.4 volt-amps (VA) maximum at 20V maximum (AC or DC)
Electrical Life	: 40,000 make-and-break cycles at full load
Contact Resistance	: 10mΩ max. initial at 2 - 4V DC 100mA for both silver and gold plated contacts
Insulation Resistance	: 1,000MΩ min.
Dielectric Strength	: 1,000V RMS at sea level
Operating Temperature	: -30°C to +85°C

### Materials:

Case	: Dially phthalate (DAP)
Actuator	: Brass, Chrome plated
Bushing	: Brass, Nickel plated
Housing	: Stainless Steel
Switch Support	: Brass or steel, tin plated
Terminal/Contact	: Silver or gold plated

### Pole Option

M1QE SPDT

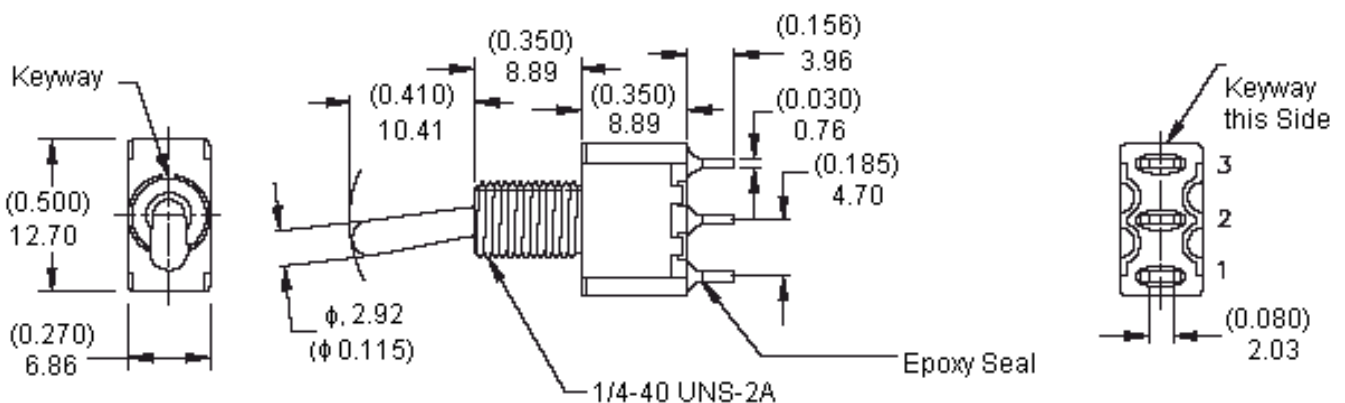

Dimensions : Inches (Millimetres)




# Toggle Switch

## Solder Lug Terminals




### Pole Option

M1QE DPDT

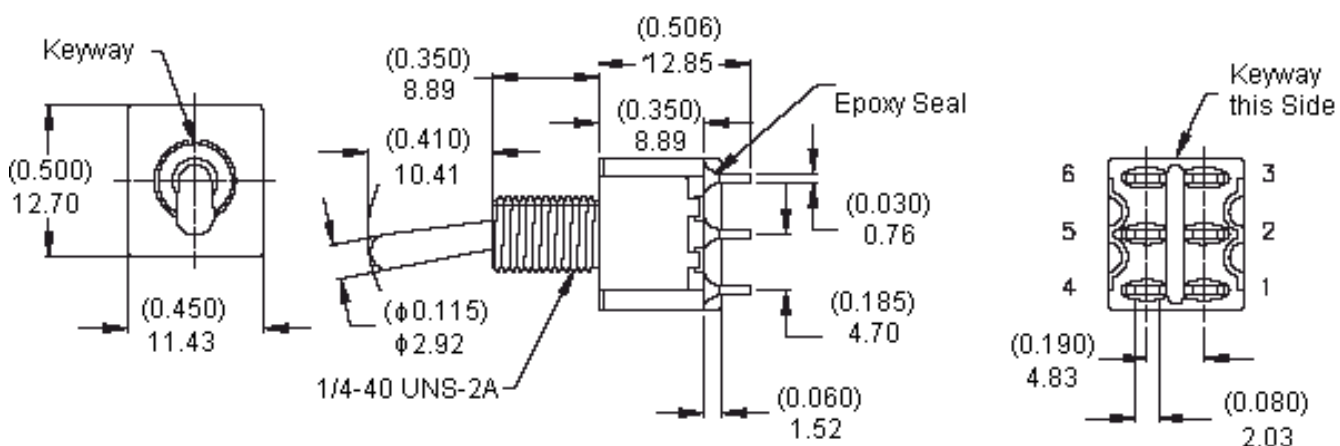

### 3PDT

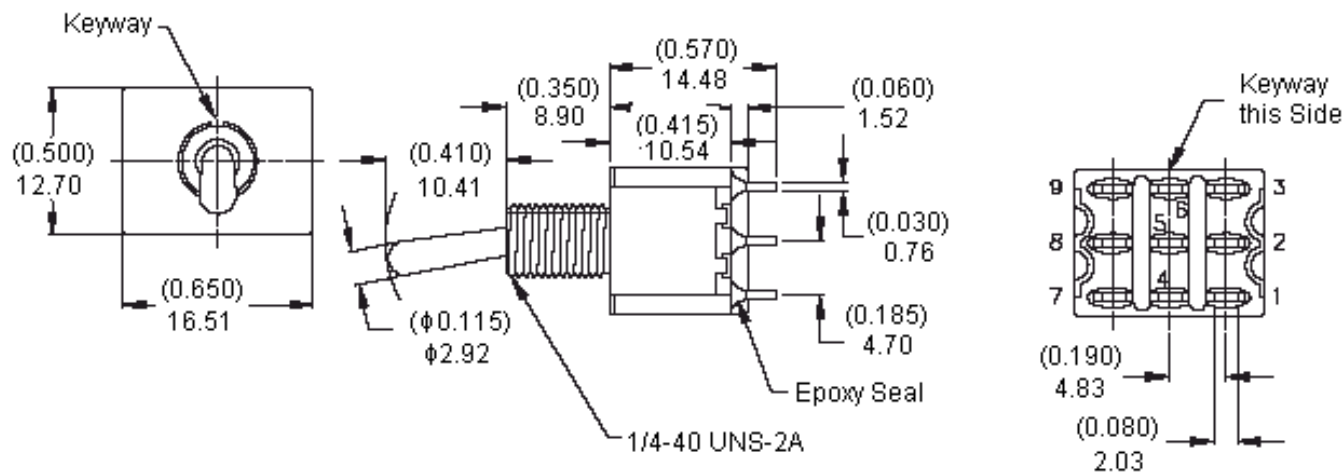


Dimensions : Inches (Millimetres)



# Toggle Switch

## Solder Lug Terminals

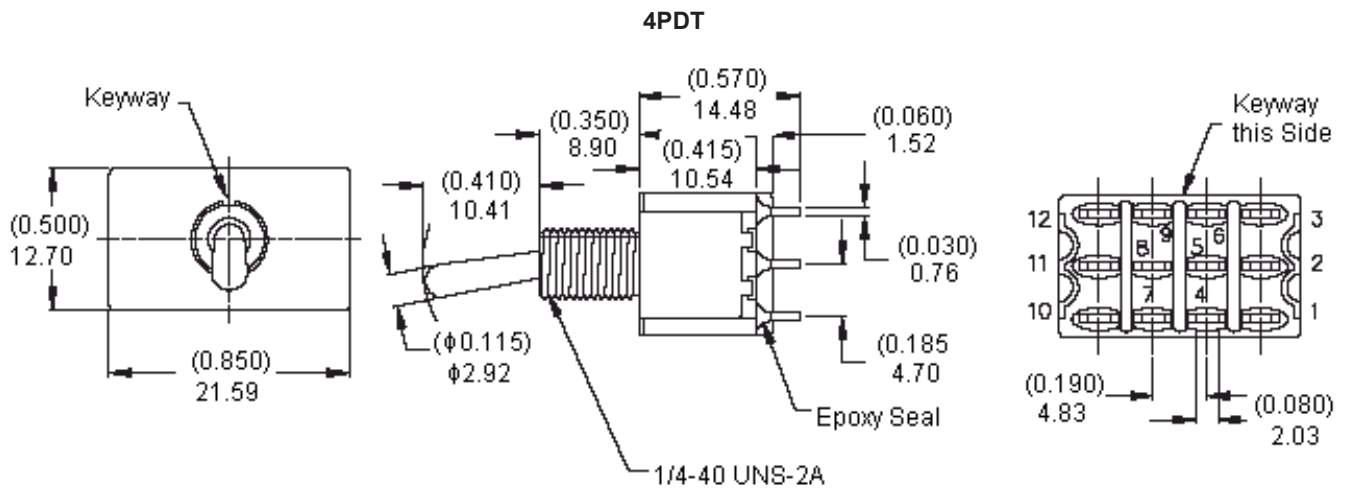


### Soldering Process:

**Manual soldering:** Use soldering iron of 30 watts, controlled at 350°C approximately 5 seconds while applying solder

**Wave soldering:**

**Recommended soldering temperature** : Recommended soldering temperature : 260 ±5°C  
 Duration of solder immersion : 5 ±seconds (PCB is 1.6mm in thickness)

Temperature Profile		
Zone	Room Temperature (°C)	Time (seconds)
Pre-heat (A)	150°C	Minimum 120
Soak (B)	180°C to 200°C	Minimum 150
Peak (C)	200°C to 235°C	Minimum 30
Peak (D)	235°C to 260°C	Minimum 40
Peak (E)	260°C	Maximum 10

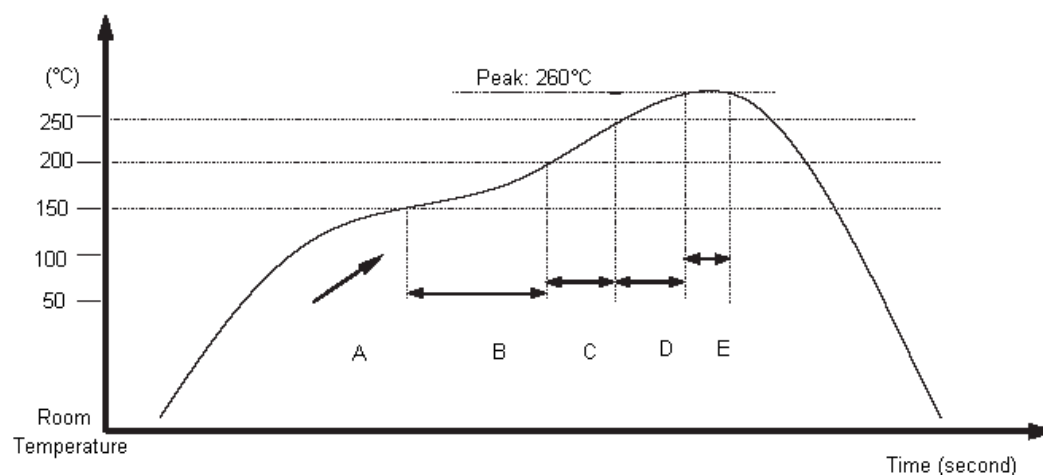

# Toggle Switch

## Solder Lug Terminals



### Specifications

Number of Poles	Switch Function			Connected Terminals/Schematic			Model Number	
	Position 1	Position 2	Position 3	Position 1	Position 2	Position 3		
SP	On	None	Mom		N/A		1MS2	
	Mom	Off			Open		1MS4	
	On					1MS5		
DP	On	None	Mom		N/A		1MD2	
	Mom	Off	Mom		Open			1MD4
	On	Off	Mom					1MD5
	On	On	On		2-3, 5-4	2 - 1, 5 - 4	1MD6	
3P	On	None	Mom		N/A		1M32	
	On	None	On				1M31	
	Mom	Off	Mom		Open			1M34
	On	Off	On					1M33
	On	Off	Mom					1M35
4P	On	None	Mom		Open		1M42	
	On	None	On				1M41	
	Mom	Off	Mom				1M44	
	On	Off	On				1M43	
	On	Off	Mom				1M45	
	On	On	On				2 - 3, 5 - 6, 8 - 9, 11 - 12	2 - 3, 5 - 4, 8 - 9, 11 - 10

Mom = Momentary



# Toggle Switch

## Solder Lug Terminals



### Part Number Table

Description	Part Number
Switch, Solder Tag, SPDT, On-Mom	1MS2T1B5M1QE
Switch, Solder Tag, SPDT, Mom-Off-Mom	1MS4T1B5M1QE
Switch, Solder Tag, SPDT, On-Off-Mom	1MS5T1B5M1QE
Switch, Solder Tag, DPDT, On-Mom	1MD2T1B5M1QE
Switch, Solder Tag, DPDT, Mom-Off-Mom	1MD4T1B5M1QE
Switch, Solder Tag, DPDT, On-Off-Mom	1MD5T1B5M1QE
Switch, Solder Tag, DPDT, On-On-On	1MD6T1B5M1QE
Switch, Solder Tag, 3PDT, On-Mom	1M32T1B5M1QE
Switch, Solder Tag, 3PDT, On-On	1M31T1B5M1QE
Switch, Solder Tag, 3PDT, Mom-Off-Mom	1M34T1B5M1QE
Switch, Solder Tag, 3PDT, On-Off-On	1M33T1B5M1QE
Switch, Solder Tag, 3PDT, On-Off-Mom	1M35T1B5M1QE
Switch, Solder Tag, 4PDT, On-Mom	1M42T1B5M1QE
Switch, Solder Tag, 4PDT, On-On	1M41T1B5M1QE
Switch, Solder Tag, 4PDT, Mom-Off-Mom	1M44T1B5M1QE
Switch, Solder Tag, 4PDT, On-Off-On	1M43T1B5M1QE
Switch, Solder Tag, 4PDT, On-Off-Mom	1M45T1B5M1QE
Switch, Solder Tag, 4PDT, On-On-On	1M46T1B5M1QE

**Important Notice** : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.