

	REVISIONS						
REV	REV ECO DESCRIPTION		DATE	BY	APPR		
A1		RELEASED DRAWING	Jun-20-2018	Blink	Tommy		

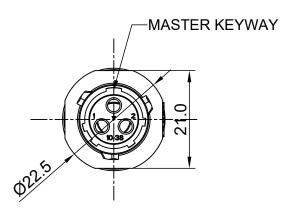

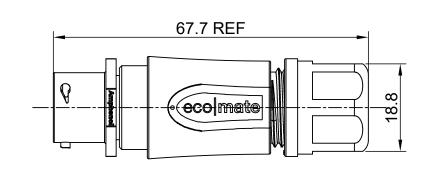

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. MATERIAL:

1.1 SHELL: THERMOPLASTIC, UL94 V-0. 1.2 INSERT: THERMOPLASTIC, UL94 V-0.

1.3 O-RING: NBR/SILICONE RUBBER.

1.4 BACK SHELL: THERMOPLASTIC, UL94 V-0. 1.5 CLAMP NUT: THERMOPLASTIC, UL94 V-0.

1.6 CLAMP RING: THERMOPLASTIC, UL94 V-0.

1.7 CABLE SEAL: EPDM.

2. SPECIFICATIONS:

2.1 RATED CURRENT: 13A (MAX). 2.2 RATED VOLTAGE: 500V(AC/DC).

2.3 OPERATING TEMPERATURE: SEE TABLE.

2.4 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE@2000 VOLTS AC.

2.5 INSULATION RESISTANCE: 5000 MEGOHMS MIN.

2.6 IP--CLASS: IP67 AND IP69K IN THE MATED CONDITION.


2.7 MATING CYCLES DURABILITY: 500 CYCLES MIN.


2.8 Rohs Compliant.


3. SUITABLE CONTACTS: 16# CONTACTS.

4. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

5. ADD LOCTITE TO RETAIN BACKSHELL DURING UN-MATING AND TO PROVIDE ADDITIONAL PROTECTION AGAINST VIBRATION.

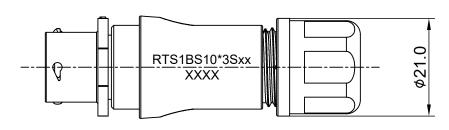

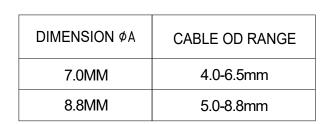

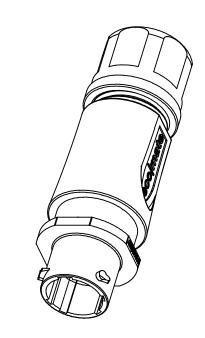





KFY	PART NUMBER		
IXL	-40°C ~ 105°C	-40°C ~ 125°C	
N	RTS1BS10N3S	RTS1BS10N3S03	

QUANTITY	PART N	IUMBER		DE	SCRIPTION	ITEM				
	MATERIALS LIST									
UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm).		SIGNATURE	S DATE	Amphenol						
2) Tolerances are a	e as follows: Fractions ±1/64 Angles ±1°	DRAWN: Blink	Jun-20-2018							
2 PL DEC ±0.15 3 PL DEC ±0.08		CHECKED: Tod	Jun-20-2018	Sine Systems - www.amphenol-sine.com						
3) Note reference		ENGINEER:		44724 Morley Drive Clinton Township, MI 48036						
MATERIAL SPECIFICATIONS: PROCESS SPECIFICATIONS: NEXT ASSY:		APPROVAL: Tommy	Jun-20-2018	0	ion rowing, iii rooco					
		CUSTOMER:		ECO-MATE,RECPTACLE,BACK SHELL, SIZE 10,3POS,SOCKET						
		SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL								
				B C-	RTS1BS10*3Sxx	A1				
				SCALE: NONE	SHEET 1	of 1				