


**Notes**

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Part No. "TESTeLINK" & Serial No., Black Text.
3. Mark Shrink Upper Shrink Tube on both connectors ends with "DC-40GHz" & Connector Series
4. Single Centered Marker up to 15'(4.5M), Two Markers 12"(30cm) from ends for lengths over 15'(4.5M)
5. 100% Tested DC to 40GHz, Plotted Data supplied with assembly.
6. Serial No. to be Marked as Cxxxxx, where xxxxx = sequential no. from log.
7. Caps to be Fitted Prior to Packaging
8. Cables to be Coiled and Placed in Plain Bag with ConductRF Label. (See Separate Label Instructions)

**TESTeLINK Phase  
Stable/Los Loss RF  
Test Cable**

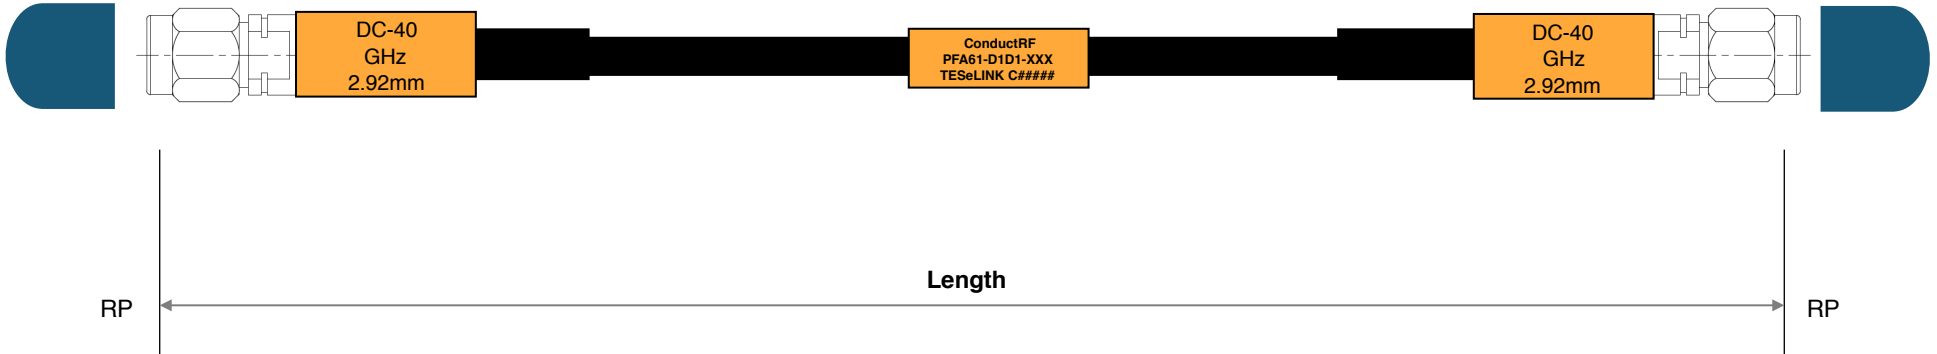

		Max Insertion Loss(dB)
Length	XXX	40GHz
12"	S12	2.065
18"	S18	2.865
24"	F02	3.665
36"	F03	5.265
48"	F04	6.865
0.5M	0M5	3.089
1.0M	1M0	5.713
VSWR(Max)		1.45:1

ConductRF  
PFA61-D1D1-XXX  
S/N-C####

Marker Example

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)  
SXX = Length in Inches (eg S18=18")  
XXM = Length in Meters (eg 2M5=2.5m)  
CXX = Length in CM (eg C50=50cm)

					<b>Customer DWG</b>	Title: <b>TESTeLINK 40GHz Cable - 2.92mm Male to Male</b>				
					<b>Remarks:</b>	Originated: 11/03/16	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840	Range: PFA	Sheet 1 of 1	
								Dwg Ref: PFA61-D1D1		
1	Pre-Release		DG	11/03/16	<b>Tolerances:</b> Length +/-2%		Checked: JW	Approved: PL	Rev: 1	Part No: <b>PFA61-D1D1-XXX</b>
REVISION HISTORY										