


PROPOSED PAD ARRANGEMENT:



Coil former material: Vectra C130 (LCP), glass-reinforced  
 UL filenumber: E83005 - UL94V-0.  
 Pin material: CuSn - Ni flash, SnPb plated.  
 Max. operating temp.: 180°C.  
 Resistance to soldering heat: 430°C - 2sec.  
 Solderability: IEC 60 068-2-20 Part 2, Test Ta, method 1.  
 Winding area: 8,4 mm<sup>2</sup>. (1,46x5,75)  
 Mean length of turn: 19,8 mm.

CLASSNO.		CPVS-RM4-1S-6P		4322 021 00541		93-04-06
97-02-14						93-09-06
NAME NAAM		M.Veekens		SUPERV. VERV.		97-02-14
MPA		CHECK CONTR.		DAT.		99-10-06
		93-04-06		Property of Eigendom van		001
				112 - 001		069
						<b>A3</b>

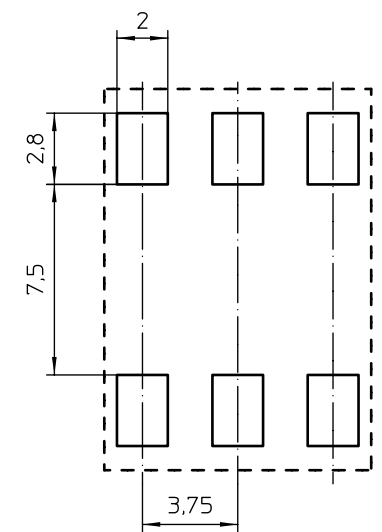