

# Transistor

## PNP, TO-19



### Pin Configuration

1. Emitter
2. Base
3. Collector

### Features:

- PNP Silicon Planar Switching Transistor
- Fast switching devices exhibiting short turn-off and low saturation voltage characteristics
- Switching And Linear Application DC to VHF Amplifier Applications

### Absolute Maximum Ratings:

Parameter	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO}$	60	V
Collector-Base Voltage	$V_{CBO}$		
Emitter-Base Voltage	$V_{EBO}$		
Collector Current Continuous	$I_C$	600	mA
Power Dissipation at $T_a = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	600	mW
		3.43	mW/ $^\circ\text{C}$
Power Dissipation at $T_c = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$		3	W
		17.2	mW/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	$T_j, T_{stg}$	-65 to +200	$^\circ\text{C}$

# Transistor

## PNP, TO-19



### Electrical Characteristics: ( $T_a = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Value		Unit
			Min.	Max.	
Collector-Emitter Voltage	$V_{CEO}^*$	$I_C = 10\text{mA}, I_B = 0$	60	-	V
Collector-Base Voltage	$V_{CBO}$	$I_C = 10\mu\text{A}, I_E = 0$		-	
Emitter-Base Voltage	$V_{EBO}$	$I_E = 10\mu\text{A}, I_C = 0$	5	-	
Collector-Cut off Current	$I_{CBO}$ $I_{CEX}$	$T_A = 150^\circ\text{C}$ $V_{CB} = 50\text{V}, I_E = 0$ $V_{CE} = 30\text{V}, V_{BE} = 0.5\text{V}$	-	10	nA
			-	10	$\mu\text{A}$
			-	50	nA
Base Current	$I_B$	$V_{CE} = 30\text{V}, V_{BE} = 0.5\text{V}$	-	50	nA
Collector Emitter Saturation Voltage	$V_{CE(sat)}^*$	$I_C = 150\text{mA}, I_B = 15\text{mA}$	-	0.4	V
Base Emitter Saturation Voltage	$V_{BE(sat)}^*$	$I_C = 150\text{mA}, I_B = 15\text{mA}$ $I_C = 500\text{mA}, I_B = 50\text{mA}$	-	1.3 2.6	
DC Current Gain	$h_{FE}$	$I_C = 0.1\text{mA}, V_{CE} = 10\text{V}$ $I_C = 1\text{mA}, V_{CE} = 10\text{V}$ $I_C = 10\text{mA}, V_{CE} = 10\text{V}$ $I_C = 150\text{mA}, V_{CE} = 10\text{V}^*$ $I_C = 500\text{mA}, V_{CE} = 10\text{V}^*$	>75	-	-
			>100	-	
			>100	-	
			100 - 300	-	
			>50	-	

### Dynamic Characteristics

Transition Frequency	ft**	$I_C = 50\text{mA}, V_{CE} = 20\text{V}, f = 100\text{MHz}$	200	-	MHz
Output Capacitance	$C_{ob}$	$V_{CB} = 10\text{V}, I_E = 0, f = 100\text{kHz}$	-	8	pF
Input Capacitance	$C_{ib}$	$V_{BE} = 2\text{V}, I_C = 0, f = 100\text{kHz}$	-	30	

### Switching Time

Delay Time	$t_d$	$I_C = 150\text{mA}, I_{B1} = 15\text{mA}$	-	10	ns
Rise Time	$t_r$	$V_{CC} = 30\text{V}$	-	40	
Turn-on Time	$t_{on}$	-	-	45	
Storage time	$t_s$	$I_C = 150\text{mA}, I_{B1} = I_{B2} = 15\text{mA}$	-	80	
Fall Time	$t_f$	$V_{CC} = 6\text{V}$	-	30	
Turn-off Time	$t_{off}$	-	-	100	


Pulse Test: Pulse Width = 300 $\mu\text{s}$ , Duty Cycle = 2%.

\*\* ft is defined as the frequency at which  $h_{fe}$  extrapolates to unity.

# Transistor PNP, TO-19




## TO-39 Metal Can Package

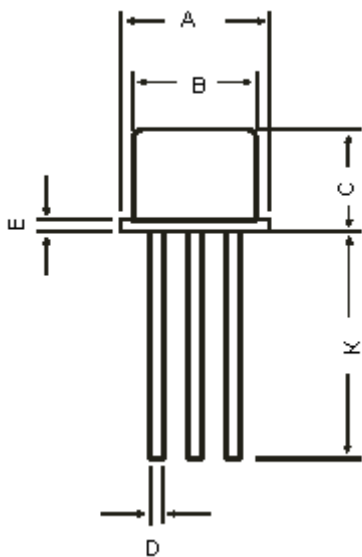

Dimensions	Min.	Max.
A	8.5	9.39
B	7.74	8.5
C	6.09	6.6
D	0.4	0.53
E	-	0.88
F	2.41	2.66
G	4.82	5.33
H	0.71	0.86
J	0.73	1.02
K	12.7	-
L	42°	48°

Dimensions : Millimetres



### Pin Configuration

1. Emitter
2. Base
3. Collector

### Part Number Table

Description	Part Number
Transistor, PNP, TO-39	2N2905A

**Important Notice** : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

