
1 | 2 3 |

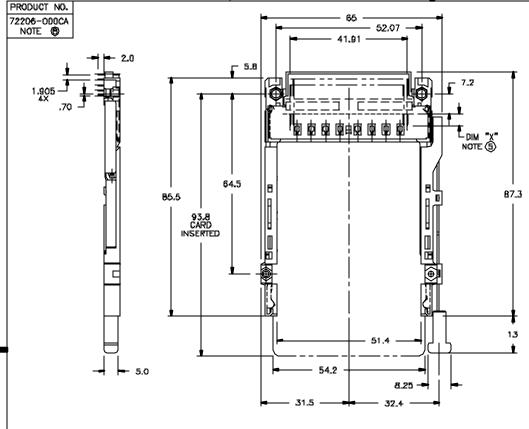

1 | 2

140 18:2:2140 10 (242 10 12 12 14 14 1 PIN 35


NOTES:

- 1 Bmm MIN CARD EJECT.
- PUSH-ROD TRAVEL: 9.5mm
- 3 MATERIAL:
- 3.1 HEADER ASSY: PLASTIC HOUSING: LCP LIL94V-Q BLACK ABOVE PCB PIN: PHOSPHOR BRONZE
- 3.2 EJECT MECHANISM ASSY:
 PLASTIC GUIDE: POLYPHTHARAMID UL94V-O BLACK
 PLASTIC PUSH-ROD BUTTON; POLYPHTHARAMID UL94V-O BLACK
 COVER PLATE, EJECT PLATE, LINK ARM,
 PUSH ROD: STAINLESS STEEL
 EMI CONTACT: PHOSPHOR BRONZE
- FINISH (PIN)
 UNDER PLATING: Q.5um MIN NT
 CONTACT AREA: Q.1um MIN GOLD OVER O.5um MIN Pd-Ni SOLDER TAIL: 2.5umMIN Sn-Pb
- ⑤ DIM X 4.25±0.1 3.5±0.1 5.0±0.1 OTHERS 36,67 1,17,34,35,51,68
- RECOMMENDED HOLD DOWN 2mm SCREWS (95121-001) AND NUTS (92869-001). RECOMMENDED SCREW TORQUE: 1.0 TO 1.5 MAX in-lbs. (1.2-1.7 cm-kgs).
- 7 SEE SHEET 3 FOR PCB LAYOUT INFORMATION.
- ADD "H" TO PART NUMBER FOR OPTIONAL HOLD DOWN (2 PER EJECT MECHANISM).





mat'i, code							tolerances unless otherwise specified						CUSTOMER			Electronics								
ltr	ecn	no	dr	date				"X±"3					COPY		4	7 F	CI	www.fcfc			felconi	(connect.com		
Α	V60	0726 RHG 4/29/		9/96	līnea	r	.XX±.13				projection t			title	title // OABBBILLO OALLO							_	1	
В	VEC	VEORIO RHG 5,		5/2	4/9B			.XXX±_051							Ի	\//	1 _C	CARDBUS S			<u> 511</u>	INGLE		
C	V61	610B9 RHG 7/2/96			angk	18	0" ±2")EC	ASSEMB		1BL	ЗLY				
D	V70	V70389 RHG 3/25/97		dr	F	R.CRAPE 4/29/98				prod				MCS	;		COC	c	1					
Ε	V12	164	4 TFG 8/16/01			engr	C	D_BRANN		4/29/96				sīze dwg no				·			_			
						chr	С	D.BRANN		4/29/96		ecale		ا ۱		72206			\subseteq	sheet		et	1	
						appd	Е	D.BRANN		4/2	9/96	1:1		Α4	/ _ /			200			1	ef 3		
she	et	revis	ion	Е	Е	Е																		1
inde	index _ shee		t 1 2		3																		1	
										3					coge						4	-		
ACAD																22	<u>526</u>	<u> </u>						
		コレケ																		ļ				

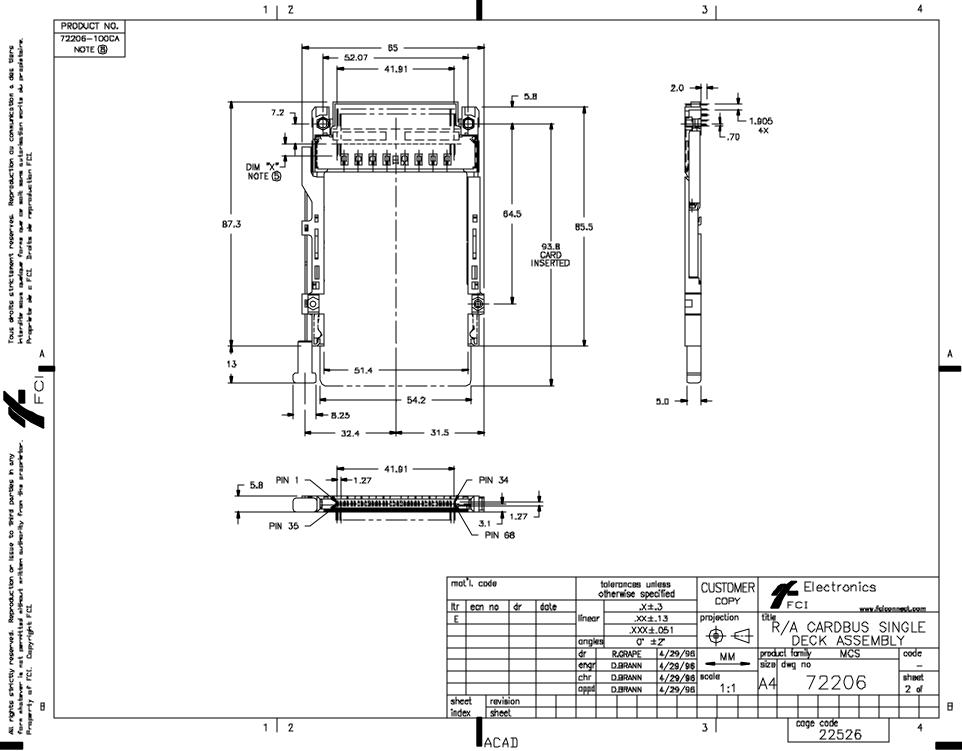

PDM: Rev:E

STATUS: Released Printed: Apr 05, 2002

NOTE ① TYP. 1.905 (4x) **⊕** 0.15 **M** 1.27 TYP .70 SEE DETAIL "A" FOR PIN OUT ø2.3 ±0.1 (2X) 5.08 (2X) 64.50 |(2X) 3.47 (2X) GROUNDING PAD ¢2.3 ±0.1 (2X) 7.0 — (2X) 59.DD±0.05

P.C.B. LAYOUT

SHIELD ROW (16X) PIN 1 PIN 67 PIN 35 PIN 36 PIN 68 DETAIL "A"

NOTES:

- (1) RECOMMENDED DIAMETER IS Ø1.0. FOR PROCESSES USING PASTE REFLOW, HOLE MAY BE AS SMALL AS ØD.79.
- 2 ALL TOLERANCES ±0.15 UNLESS NOTED.

mat		talerances unless otherwise specified							CUSTOMER		Electronics												
ltr	ecn	no	dr	date		,X±,3					COPY			■ FCI				www.fciconn			nect.com		
Ε					línear		.XXX±.051				projection		title /A OADS								1		
											♦ ◁			Ի	//	/A CARD DECK A			ROZ ZIV			√G.FF	
					angle	ø										<u> JEC</u>	:K	ASSEMB		<u> 18</u> L	<u>ILY </u>		
					dr	R	RJCRAPE		4/29/96					prod				MCS			code		1
					engr	D	D.BRANN D.BRANN		4/29/96 4/29/96		·			SZĐ	dw	on pwt						_	
					chr	D							Α4	رر الا			206			sheet 3 of			
					арра	D.BRANN		4/29/96		ı 1:1			/\4		/ /			VV					
she	et	revis	ion																				
inde	Х_	shee	:t																				
ACAD										3					cage		: 52€	5			4		
	■ACAD																						

1 2

PDM: Rev:E

STATUS:Released Printed: Apr 05, 2002