

Features

Regulated Converters

- 4:1 Wide Input Range
- 3kVAC Reinforced Insulation for 110Vin
2.25kVDC Basic Insulation for 24Vin & 48Vin
- Efficiency up to 90%
- No Minimum Load Required
- EN50155, IEC/EN60950-1 Pending

RECOM
DC/DC Converter

RP90Q-RW

**90 Watt
Quarter
Brick
Single Output**



Description

The quarter-brick RP90Q series DC/DC converters are designed for railway rolling stock and high voltage battery applications. Each series has three 4:1 input voltage range options to cover all input voltages from 9VDC up to 160VDC with isolated and regulated 5V to 48VDC outputs. The converters have high efficiencies and metal base-plates to permit a wide operating temperature range from -40°C to +85°C (when mounted on a suitable heatsink). The case is fitted with threaded inserts to allow secure mounting to the PCB or bulkhead for use in high shock and vibration environments. The converters are EN50155 and IEC/EN60950 certified. The RP90Q-RW series have a three year warranty.

Selection Guide

Part Number	Input Voltage Range [VDC]	Output Voltage [VDC]	Output Current [mA]	Input ⁽¹⁾ Current [mA]	Output Power [W]	Efficiency ⁽¹⁾ typ. [%]	Max. Capacitive Load [μF]
RP90Q-2405SRW	9-36	5	18000	4213	90	89	36000
RP90Q-2412SRW	9-36	12	7500	4213	90	89	6250
RP90Q-2415SRW	9-36	15	6000	4213	90	89	4000
RP90Q-2424SRW	9-36	24	3700	4157	89	89	1540
RP90Q-2448SRW	9-36	48	1800	4090	86.5	88	380
RP90Q-4805SRW	16.5-75	5	18000	2107	90	89	36000
RP90Q-4812SRW	16.5-75	12	7500	2107	90	89	6250
RP90Q-4815SRW	16.5-75	15	6000	2083	90	90	4000
RP90Q-4824SRW	16.5-75	24	3700	2055	89	90	1540
RP90Q-4848SRW	16.5-75	48	1800	2000	86.5	90	380
RP90Q-11005SRW	40-160	5	17000	868	85	89	34000
RP90Q-11012SRW	40-160	12	7000	858	84	89	5830
RP90Q-11015SRW	40-160	15	5500	843	82.5	89	3670
RP90Q-11024SRW	40-160	24	3500	944	84	89	1460
RP90Q-11048SRW	40-160	48	1800	971	86.5	89	380


Notes:

Note1: Efficiency is tested by nominal Vin, full load and at 25°C.



EN50155 pending
IEC/EN60950-1 pending

Model Numbering

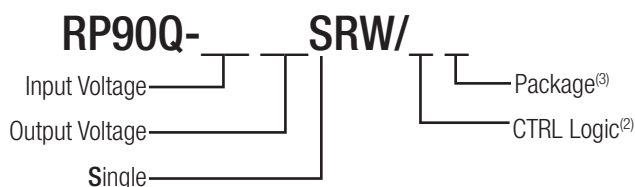

Ordering Examples

RP90Q-2405SRW/N = 24V Input, 5V Output, Single, Neg. CTRL function

RP90Q-11012SRW/P = 110V Input, 12V Output, Single, Pos. CTRL function

RP90Q-2405SRW/N-HC = 24V Input, 5V Output, Single, Neg. CTRL function, with premounted Heat-sink

Notes:



Note2: standard part is with suffix "P" for positive logic (1=ON, 0=OFF)
or add suffix "N" instead for negative logic (0=ON, 1=OFF)

Note3: add suffix "-HC" for premounted Heat-sink
(compatible with all other suffixes)

Specifications measured @ $t_a = 25^{\circ}\text{C}$, resistive load, nominal V_{in} and rated I_{out} unless otherwise noted

BASIC CHARACTERISTICS				
Parameter	Condition	Min.	Typ.	Max.
Internal Input Filter				Pi-Type
Input Voltage Range	nom $V_{in} = 24\text{V}$ nom $V_{in} = 48\text{V}$ nom $V_{in} = 110\text{V}$	9VDC 16.5VDC 40VDC	24VDC 48VDC 110VDC	36VDC 75VDC 160VDC
Input Surge Voltage	$V_{in} = 24\text{V}$, 1s max. $V_{in} = 48\text{V}$, 1s max. $V_{in} = 110\text{V}$, 1s max.			50VDC 100VDC 185VDC
Quiescent Current	$V_{in} = 24\text{V}$ $V_{in} = 48\text{V}$ $V_{in} = 110\text{V}$		25ma 15mA 8mA	
Start-up time	Power up ON/OFF Control		75ms 75ms	100ms 100ms
Internal Operating Frequency		270kHz	300kHz	330kHz
Minimum Load		0%		
Ripple and Noise	Measured by 20MHz BW with a 22 μF /25V X7R MLCC with a 22 μF /25V X7R MLCC with a 4.7 μF /50V X7R MLCC with a 2.2 μF /100V X7R MLCC	5 Vout 12, 15Vout 24Vout 48Vout	75mVp-p 100mVp-p 200mVp-p 300mVp-p	
Under Voltage Lockout (UVLO)	$V_{in} = 24\text{V}$	DC-DC ON DC-DC OFF	7.3VDC	9VDC 8.1VDC
	$V_{in} = 48\text{V}$	DC-DC ON DC-DC OFF	15.5VDC	18VDC 16.3VDC
	$V_{in} = 110\text{V}$	DC-DC ON DC-DC OFF	33VDC	43VDC 36VDC
ON/OFF Control	Positive Logic	DC-DC ON DC-DC OFF	Open or $3.0\text{V} < V_r < 12\text{V}$ Short or $0\text{V} < V_r < 1.2\text{V}$	
	Negative Logic	DC-DC ON DC-DC OFF	Short or $0\text{V} < V_r < 1.2\text{V}$ Open or $3.0\text{V} < V_r < 12\text{V}$	
Input Current of CTRL pin		-0.5mA		1mA
Standby Current			3mA	
Output Trim		-20%		+10%
Remote Sense	% of set Vout			10%





RP90Q-2405SRW

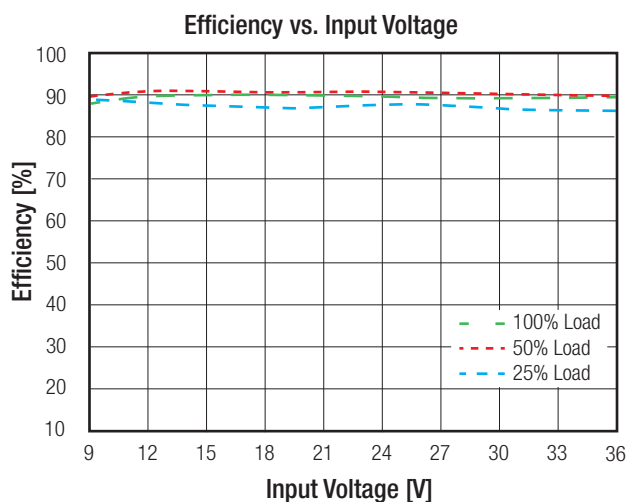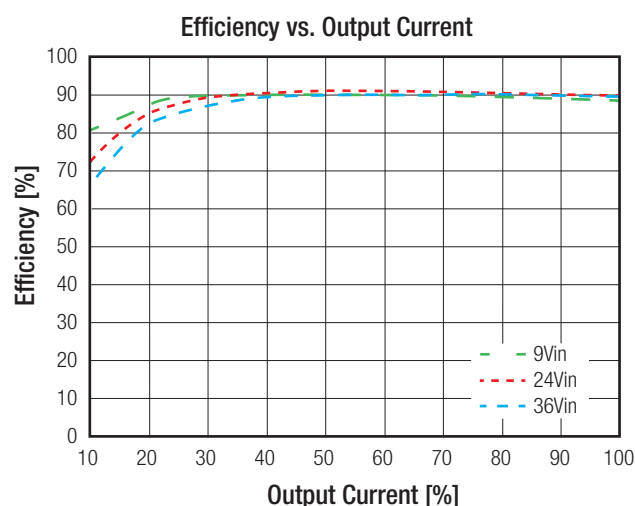



continued on next page

Specifications measured @ $t_a = 25^\circ\text{C}$, resistive load, nominal V_{in} and rated I_{out} unless otherwise noted

RP90Q-2405SRW

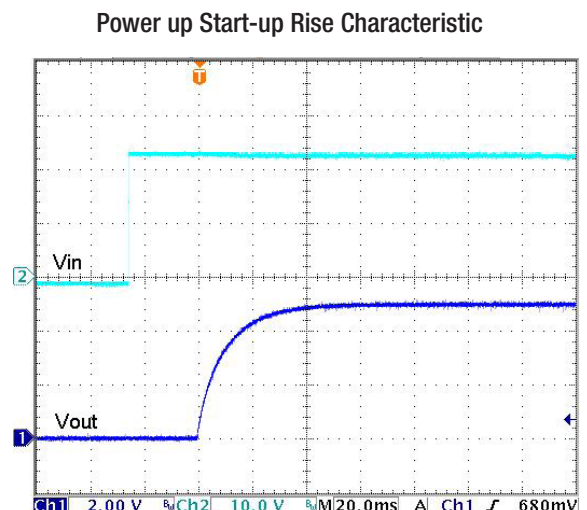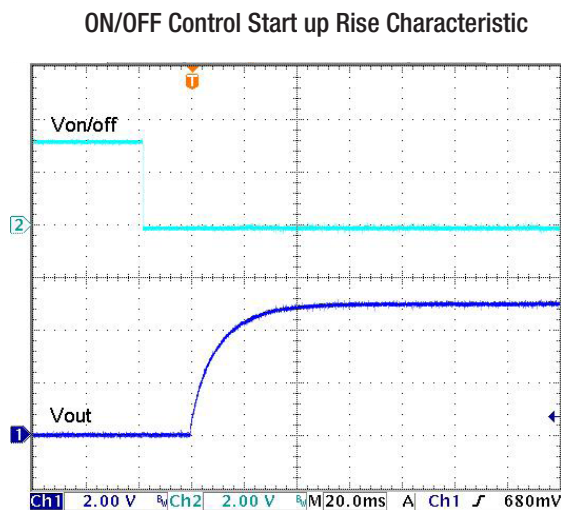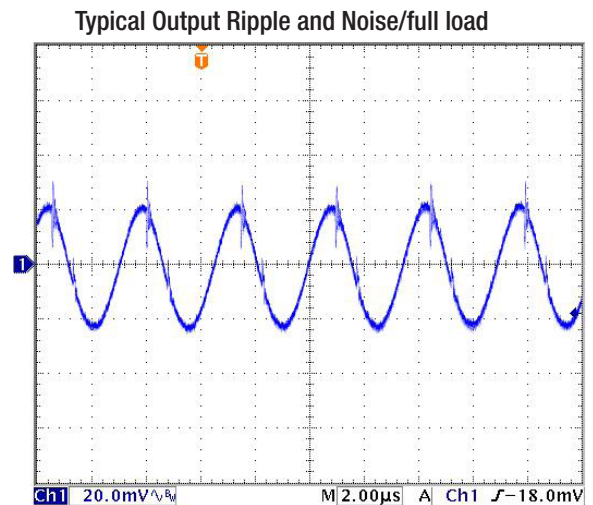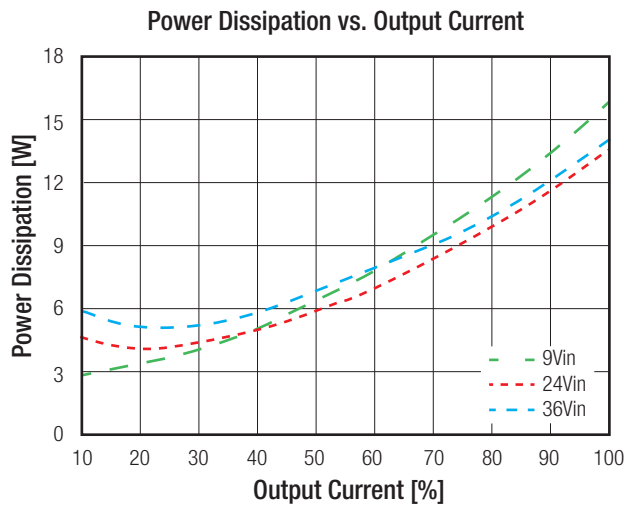

RP90Q-4805SRW

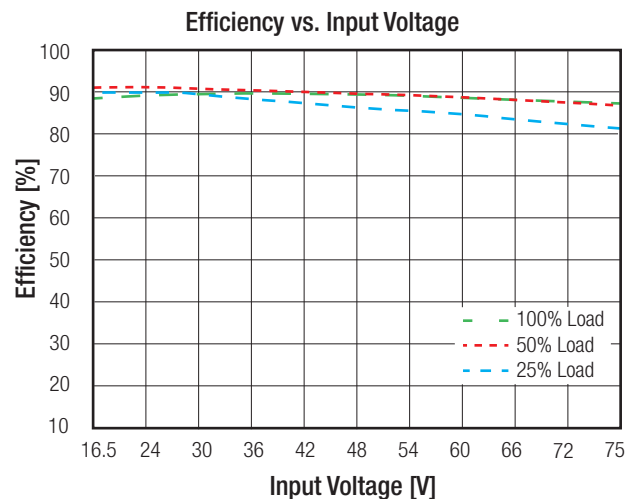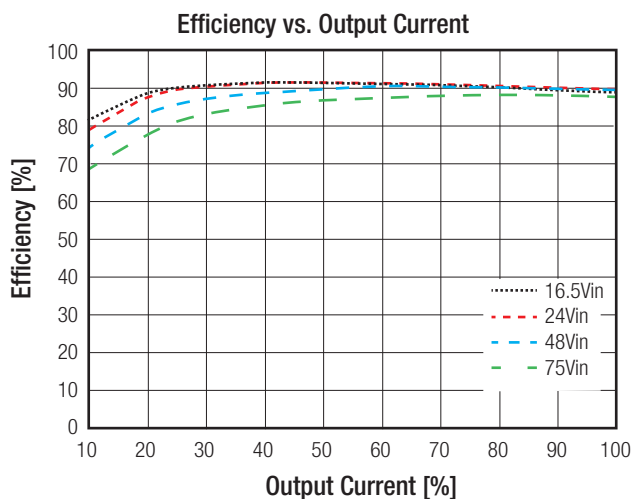


continued on next page


Specifications measured @ $t_a = 25^\circ\text{C}$, resistive load, nominal V_{in} and rated I_{out} unless otherwise noted

RP90Q-4805SRW


Power Dissipation vs. Output Current

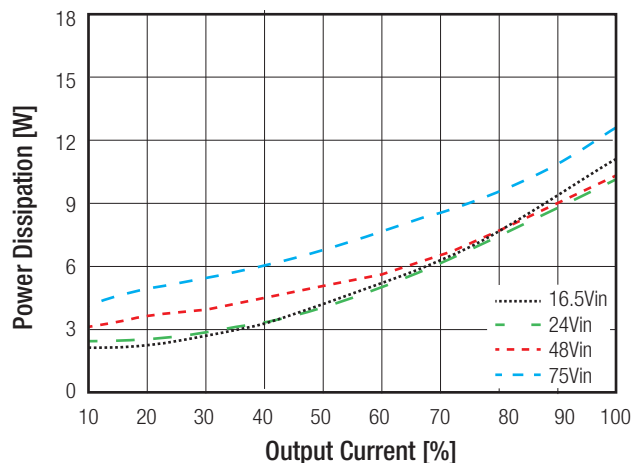


Typical Output Ripple and Noise/full load

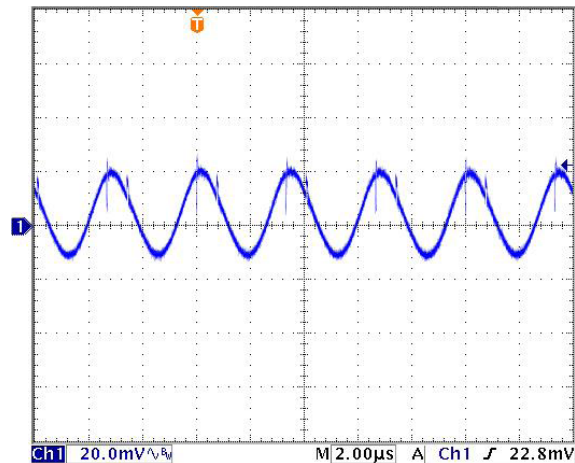

ON/OFF Control Start up Rise Characteristic

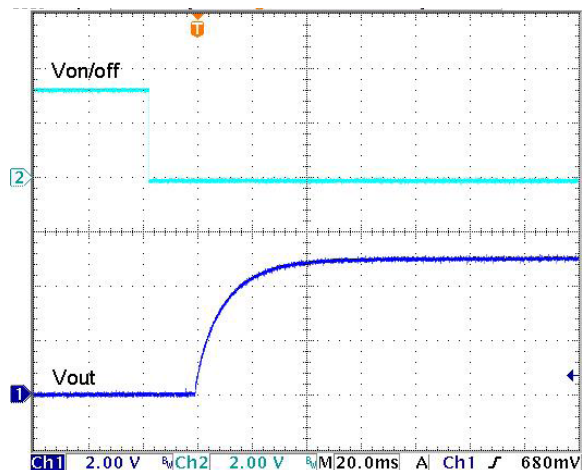


Power up Start-up Rise Characteristic

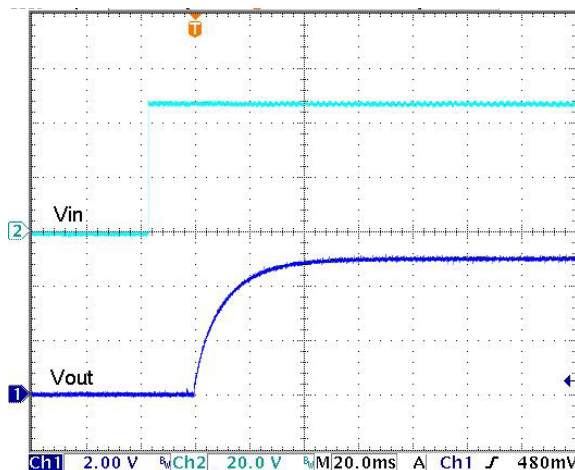


RP90Q-11005SRW

Efficiency vs. Output Current

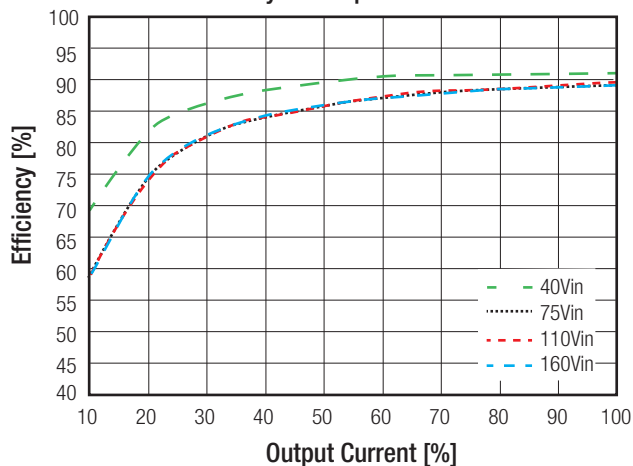





Efficiency vs. Input Voltage

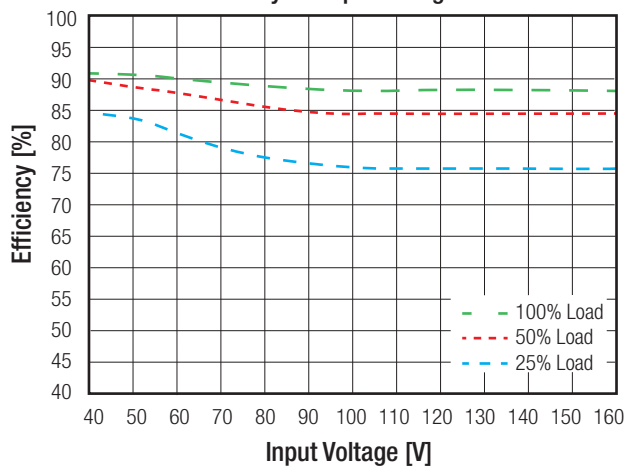

continued on next page

Specifications measured @ $t_a = 25^\circ\text{C}$, resistive load, nominal V_{in} and rated I_{out} unless otherwise noted



RP90Q-11005SRW

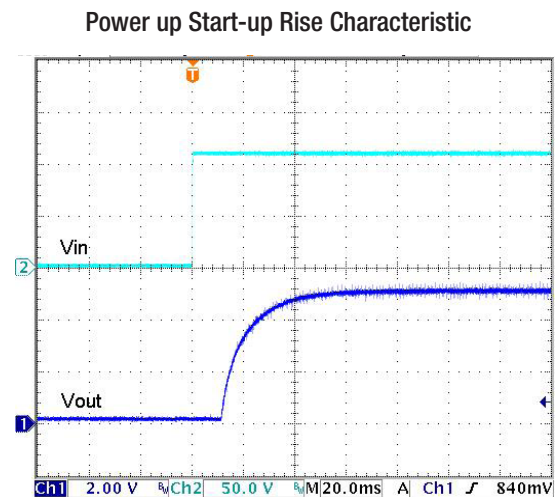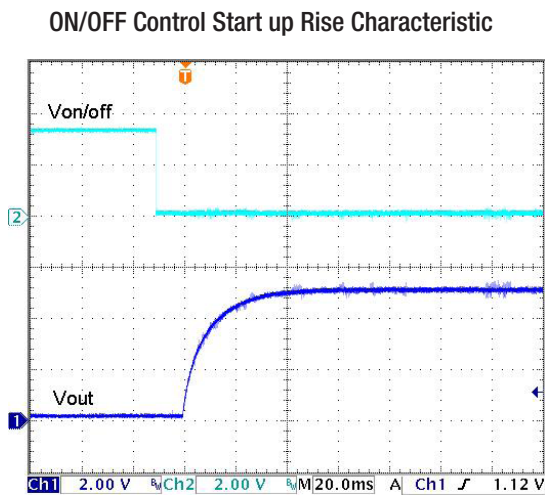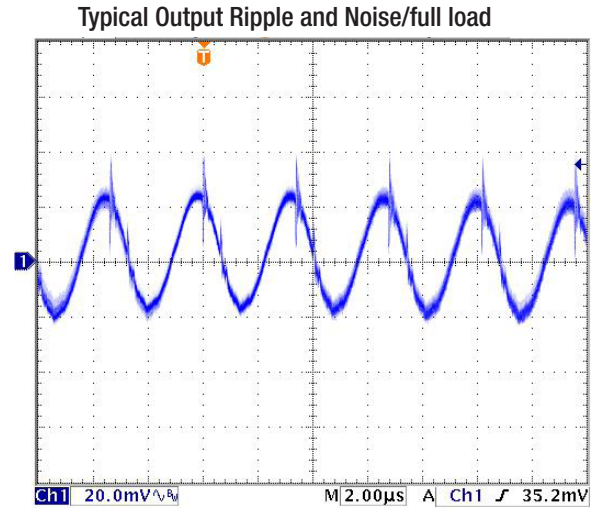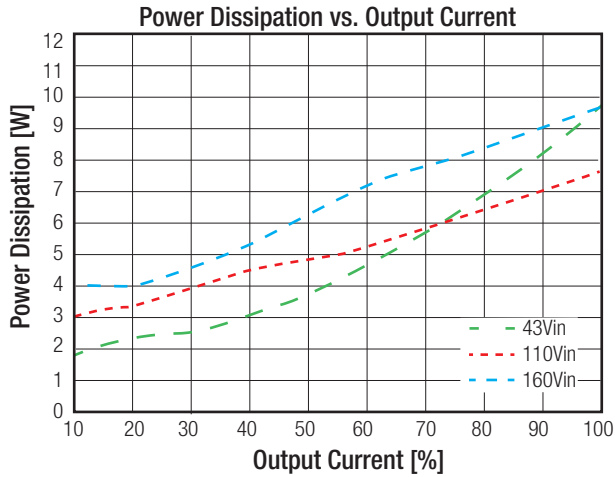

OUTPUT TRIM

Output Voltage Trimming

RP90Q-RW converters offer the feature of trimming the output voltage over a certain range around the nominal value by using external trim resistors. The values for trim resistors shown in trim tables below are according to standard E96 values; therefore, the specified voltage may slightly vary; they also can be calculated with below shown equation.



Specifications (measured @ ta= 25°C, nominal input voltage, full load and after warm-up)

OUTPUT TRIM

Trim Calculation

$$R_1 = \left[\frac{511 \cdot V_{out} + 5.11 \Delta V_{out} \cdot V_{out}}{1.225 \cdot \Delta V_{out}} - \frac{(511 + 10.22 \Delta V_{out})}{\Delta V_{out}} \right] k\Omega$$

$$R_2 = \left[\frac{511}{\Delta V_{out}} - 10.22 \right] k\Omega$$

V_{out} = Output Voltage
 ΔV_{out} = Output Voltage Trim in %
 R₁ = trim up resistor
 R₂ = trim down resistor

Practical Example:

Trim Up:

V_{out} = 5V, ΔV_{out} = 10% (5.5V)

$$R_1 = \left[\frac{511 \cdot V_{out} + 5.11 \Delta V_{out} \cdot V_{out}}{1.225 \cdot \Delta V_{out}} - \frac{(511 + 10.22 \Delta V_{out})}{\Delta V_{out}} \right] k\Omega = \frac{511 \cdot 5 + 5.11 \cdot 10 \cdot 5}{1.225 \cdot 10} - \frac{511 + 10.22 \cdot 10}{10} = 229.43 - 61.32 = 169 k\Omega$$

Trim down:

V_{out} = 5V, ΔV_{out} = -10% (4.5V)

$$R_2 = \left[\frac{511}{\Delta V_{out}} - 10.22 \right] k\Omega = \frac{511}{10} - 10.22 = 41.2 k\Omega$$

RP90Q-xx05SRW

Trim up	1	2	3	4	5	6	7	8	9	10	%
V _{out} =	5.05	5.10	5.15	5.20	5.25	5.30	5.35	5.4	5.45	5.50	Volts
R ₁ =	1580	806	536	402	324	247	237	205	187	169	KOhms

RP90Q-xx12SRW

Trim up	1	2	3	4	5	6	7	8	9	10	%
V _{out} =	12.12	12.24	12.36	12.48	12.60	12.72	12.84	12.96	13.08	13.20	Volts
R ₁ =	4530	2320	1540	1150	931	787	681	604	536	487	KOhms

RP90Q-xx15SRW

Trim up	1	2	3	4	5	6	7	8	9	10	%
V _{out} =	15.15	15.30	15.45	15.60	15.75	15.90	16.05	16.20	16.35	16.50	Volts
R ₁ =	5760	2940	1960	1470	1210	1020	866	768	698	619	KOhms

RP90Q-xx24SRW

Trim up	1	2	3	4	5	6	7	8	9	10	%
V _{out} =	24.24	24.48	24.72	24.96	25.20	25.44	25.68	25.92	26.16	26.40	Volts
R ₁ =	9530	4870	3240	2940	2000	1690	1470	1270	1150	1050	KOhms

RP90Q-xx48SRW

Trim up	1	2	3	4	5	6	7	8	9	10	%
V _{out} =	48.48	48.96	49.44	49.92	50.40	50.88	51.36	51.84	52.32	52.80	Volts
R ₁ =	19600	9945	6650	5110	4120	3400	3010	2610	2370	2150	KOhms


Trim Down all Vout's

Trim down	1	2	3	4	5	6	7	8	9	10	%
R ₂ =	499	243	162	118	909	75	63.4	53.6	46.4	41.2	KOhms
Trim down	11	12	13	14	15	16	17	18	19	20	%
R ₂ =	36.5	32.4	28.7	26.1	23.7	21.5	19.6	18.2	16.5	15.4	KOhms

continued on next page

Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

Remote Sense

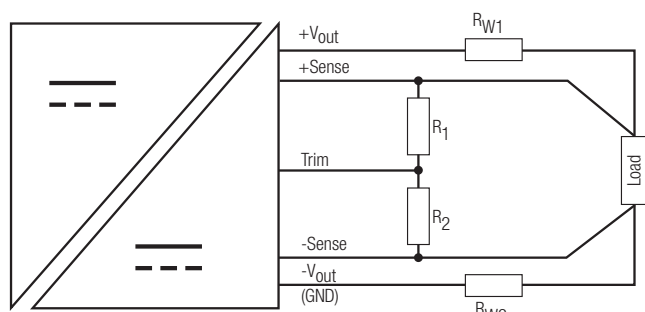

The output voltage can be adjusted by both trim and remote sense. The maximum combined adjustment range $\pm 10\%$. Derate the maximum output power if using the trim or sense function.


R_{W1} ... wire losses +
 R_{W2} ... wire losses -
 R_1 ... trim up resistor
 R_2 ... trim down resistor

REGULATIONS


Parameter	Condition	Value
Output Accuracy		$\pm 1.0\%$
Line Regulation	low line to high line at full load	$\pm 0.1\%$
Load Regulation	0% to 100% load	$\pm 0.2\%$ $\pm 0.1\%$ others
Transient Response	25% load step change	250 μs typ.

Transient Response to Dynamic Load Change from 100% to 75% to 100% of Full Load at nom. V_{in}


RP90Q-2405SRW

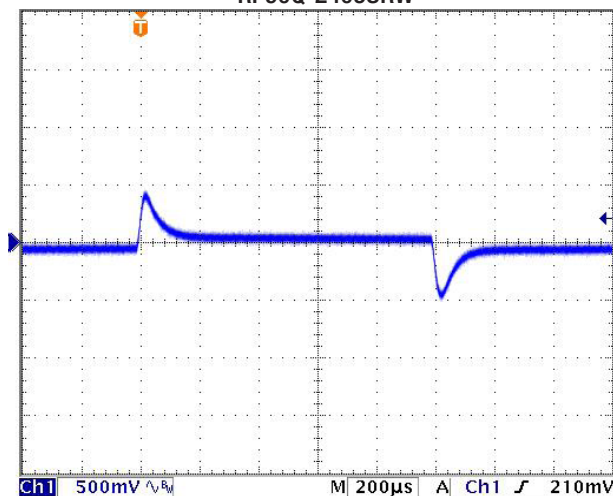

RP90Q-4805SRW

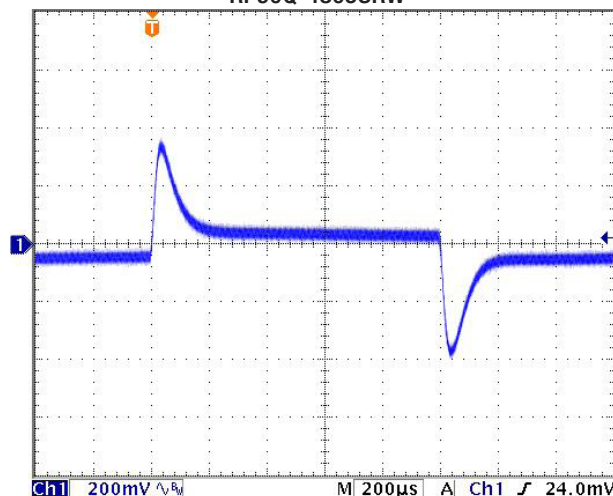

RP90Q-11005SRW

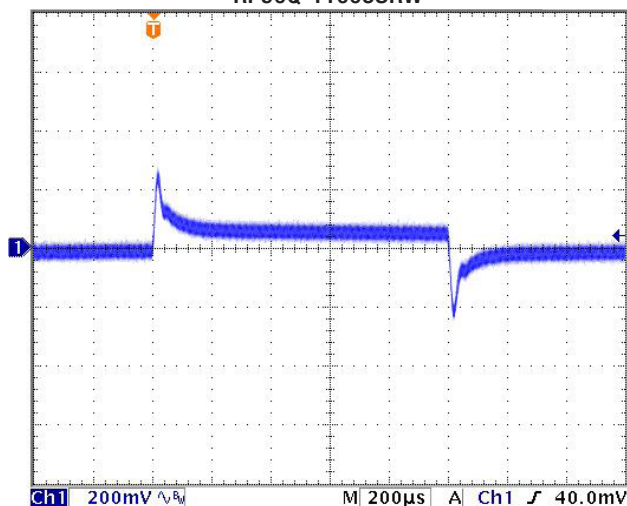

Specifications (measured @ $T_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

PROTECTIONS			
Parameter	Condition		Value
Short Circuit Protection (SCP)	below 100mΩ		continuous, automatic recovery
Over Voltage Protection (OVP)	% of nom. Vout		115%-130%, Hiccup Mode
Over Load Protection (OLP)	% Iout rated		110%-140%, Hiccup Mode
Over Temperature Protection (OTP)			+110°C
Isolation Voltage	110Vin	I/P to O/P I/P or O/P to Baseplate	3kVDC/1minute 1.5kVDC/1minute
	24Vin, 48Vin	I/P to O/P I/P or O/P to Baseplate	2.25kVDC/1minute 2.25kVDC/1minute
Isolation Resistance	500 VDC		1GΩ min.
Isolation Capacitance			1500pF max.
Isolation Grade	110Vin 24Vin, 48Vin		Reinforced Insulation Basic Insulation
Notes:			
Note4: An input fuse is required if the mains supply isn't over-current protected. Recommended fuse: 24Vin: 15A slow blow, 48Vin: 7.5A slow blow and 110Vin: 3A slow blow.			

ENVIRONMENTAL		
Parameter	Condition	Value
Operating Baseplate Temperature Range		-40°C to +100°C
Maximum Case Temperature		100°C
Temperature Coefficient		±0.02%/°C max.
Thermal Impedance	vertical direction by natural convection (0.1m/s) without Heat-sink vertical direction by natural convection (0.1m/s) with Heat-sink	9°C/W 7.5°C/W
Operating Humidity		5% - 95% RH
Pollution Degree		PD2
Shock	according to EN61373 standard	
Thermal Shock	according to MIL-STD-810F standard	
Vibration	according to EN61373 standard	
Fire protection on railway vehicles	according to EN45545-2, 2013 standard	
MTBF	according to MIL-HDBK-217F standard, 25°C	507.0 x 10 ³ hours

Thermal Calculation

$$R_{th\text{case-ambient}} = 9^\circ\text{C/W (vertical)}$$

$$R_{th\text{case-ambientHC}} = 7.5^\circ\text{C/W (vertical)}$$

$$R_{th\text{case-ambient}} = \frac{T_{\text{case}} - T_{\text{ambient}}}{P_{\text{dissipation}}}$$

$$P_{\text{dissipation}} = P_{\text{IN}} - P_{\text{OUT}} = \frac{P_{\text{OUTapp}}}{\eta} - P_{\text{OUTapp}}$$

T_{case}	=	Case Temperature
T_{ambient}	=	Environment Temperature
$P_{\text{dissipation}}$	=	Internal losses
P_{IN}	=	Input Power
P_{OUT}	=	Output Power
η	=	Efficiency under given Operating Conditions
$R_{th\text{case-ambient}}$	=	Thermal Impedance

Practical Example:

Take the RP90Q-2405SRW with 9V input Voltage and 50% load. What is the maximum ambient operating temperature? Use converter vertical in application without airflow.

$$\text{Eff}_{\text{min}} = 89\% @ V_{\text{nom}}$$

$$P_{\text{OUT}} = 90\text{W}$$

$$P_{\text{OUTapp}} = 90 \times 0.5 = 45\text{W}$$

$$\eta = 91\% \text{ (Efficiency vs. Load Graph)}$$

$$P_{\text{dissipation}} = \frac{45}{0.91} - 45 = 4.45\text{W}$$

without Heat-sink

$$R_{\text{th}} = \frac{T_{\text{casemax}} - T_{\text{amb}}}{P_{\text{dissipation}}} \rightarrow 9^\circ\text{C/W} = \frac{100 - T_{\text{amb}}}{4.45\text{W}}$$

$$T_{\text{amb}} = 60^\circ\text{C}$$

with Heat-sink

$$R_{\text{thHC}} = \frac{T_{\text{casemax}} - T_{\text{amb}}}{P_{\text{dissipation}}} \rightarrow 7.5^\circ\text{C/W} = \frac{100 - T_{\text{amb}}}{4.45\text{W}}$$







$$T_{\text{ambHC}} = 66^\circ\text{C}$$

continued on next page

Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

Derating Graph⁽⁵⁾

(@ Chamber - tested with forced convection)

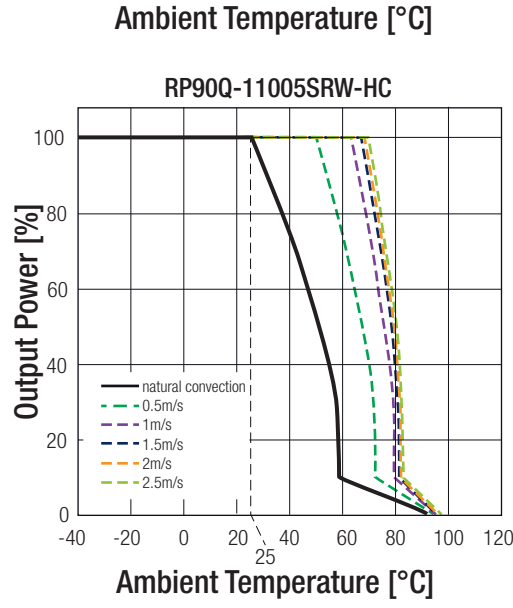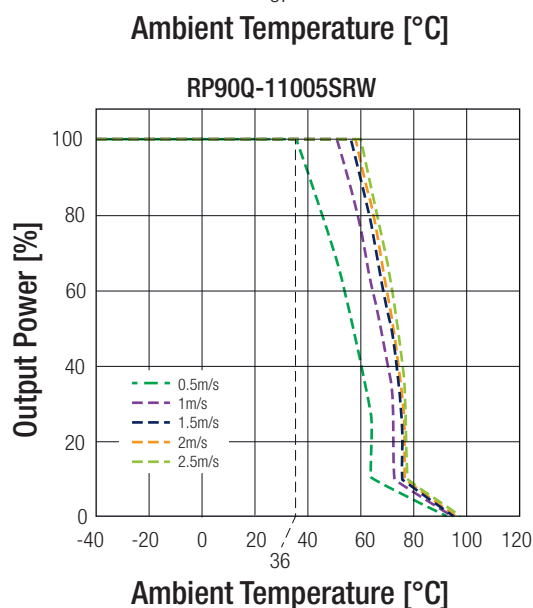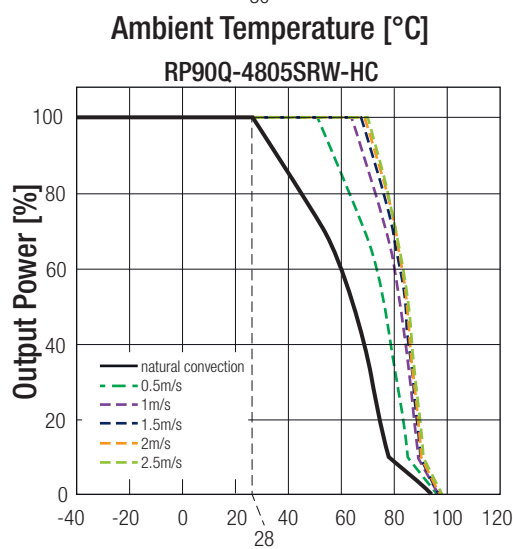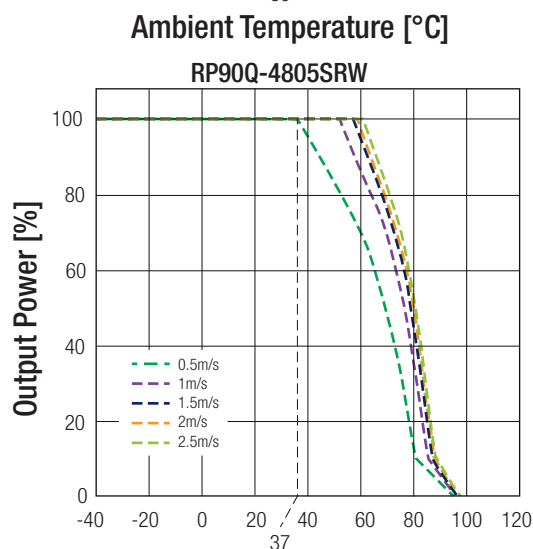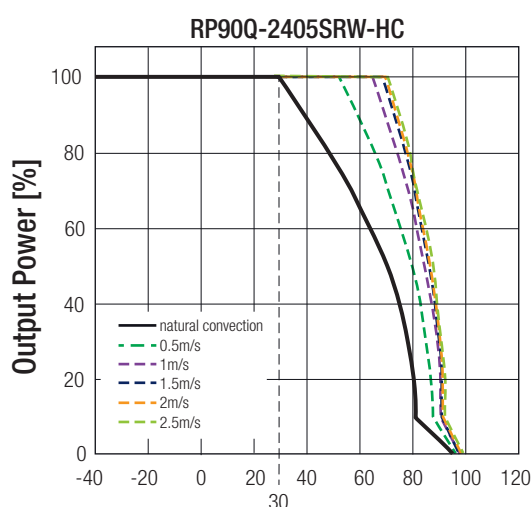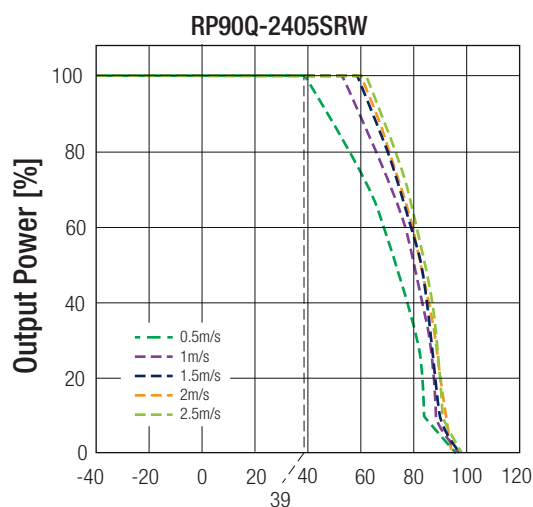

Notes:

Note5: Derating graphs are valid only for the shown part numbers. If you need detailed derating-information about a part-number not shown here please contact our technical support service at techsupportAT@recom-power.com

Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

SAFETY AND CERTIFICATIONS

Certificate Type (Safety)	Report / File Number	Standard
IEC/EN Information Technology Equipment - General Requirements for Safety	pending	IEC/EN60950-1
Railway Applications - Electrical Equipment used on rolling stock	pending	EN50155
EMI Compliance	Condition	Standard / Criterion
Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement	with external filter	EN55022, Class A and Class B
Industrial, scientific and medical equipment - Radio frequency disturbance characteristics - Limits and methods of measurement		EN55011, Class A and Class B
ESD Electrostatic discharge immunity test	Air $\pm 8\text{kV}$ and Contact $\pm 6\text{kV}$ 20 V/m $\pm 2\text{kV}$ EN55024 & EN50155 $\pm 2\text{kV}$ 10 V _{r.m.s} 100A/m continuous; 1000A/m 1s	EN61000-4-2, Criteria A
Radiated, radio-frequency, electromagnetic field immunity test		EN61000-4-3, Criteria A
Fast Transient and Burst Immunity ⁽⁹⁾		EN61000-4-4, Criteria A
Surge Immunity ⁽⁹⁾		EN61000-4-5, Criteria A
Immunity to conducted disturbances, induced by radio-frequency fields		EN61000-4-6, Criteria A
Power Magnetic Field Immunity		EN61000-4-8, Criteria A


Notes:

Note6: An external input filter capacitor is required if the module has to meet EN61000-4-4 and EN61000-4-5.

The **24Vin** and **48Vin** version recommend 2pcs of aluminium electrolytic capacitor to connect in parallel.
Recom suggest: Nippon Chemi-con KY series, 220 μF /100V.

The **110Vin** version recommend 2pcs of aluminium electrolytic capacitor to connect in parallel.
Recom suggest: Nippon Chemi-con KXJ series, 150 μF /200V

EMI Filtering according to EN55022/11 Class A and EN50121-1 (24Vin and 48Vin)

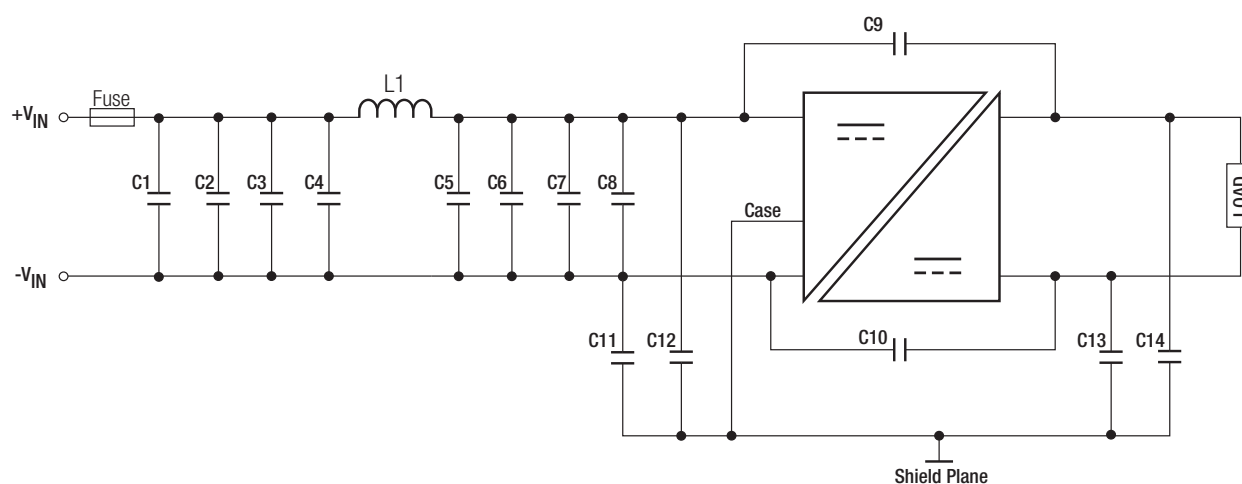


MODEL	C1	C2, C3, C4	C5	C6, C7, C8	C9 to C14	L1
RP90Q-24xxSRW	N/A	6.8 μF , 50V 1812 MLCC	N/A	6.8 μF , 50V 1812 MLCC	1000pF, 3kV 1808 MLCC	0.68 μH , 17A SMD Inductor
RP90Q-48xxSRW	4.7 μF , 100V 1812 MLCC	4.7 μF , 100V 1812 MLCC	4.7 μF , 100V 1812 MLCC	4.7 μF , 100V 1812 MLCC	1000pF, 3kV 1808 MLCC	3.3 μH , 10A SMD Inductor

continued on next page

Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)


RP90Q-2405SRW

Conducted Emission EN55022 Class A

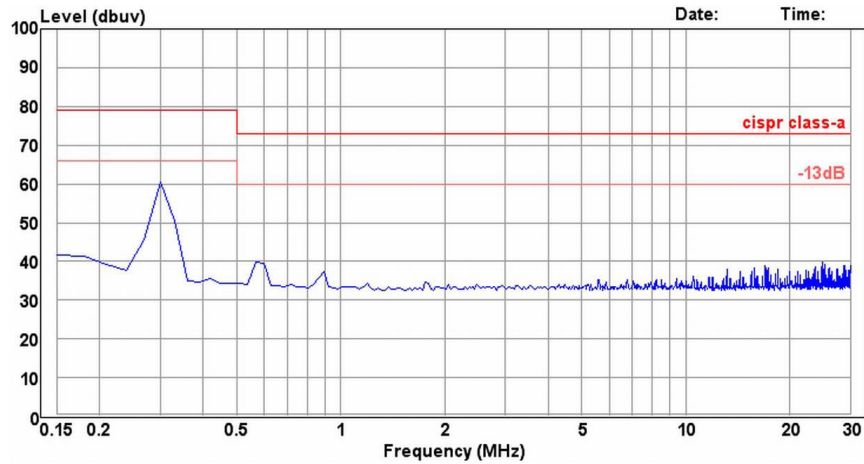


RP90Q-4805SRW

Conducted Emission EN55022 Class A

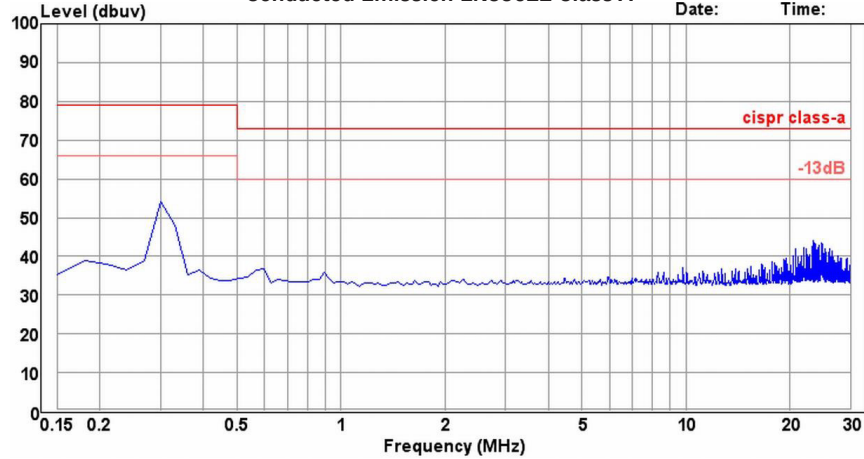

EMI Filtering according to EN55022/11 Class A and EN50121-1 (110Vin)

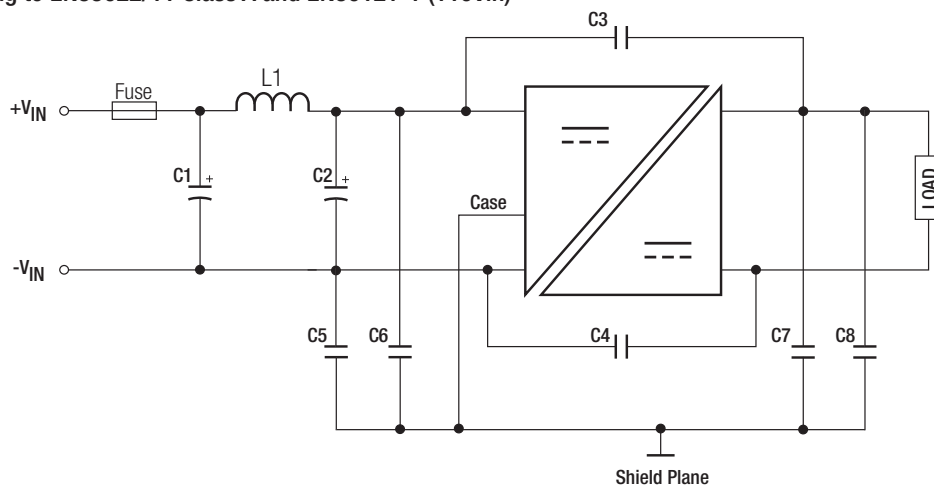


MODEL	C1, C2	C3 to C8	L1
RP90Q-110xxSRW	39 μF , 250V Al cap. (lie down) Rubycon BXF	1000pF, 3kV 1808 MLCC	30.1 μH , 5A SMD Inductor

continued on next page


Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

RP90Q-11005SRW

Conducted Emission EN55022 Class A

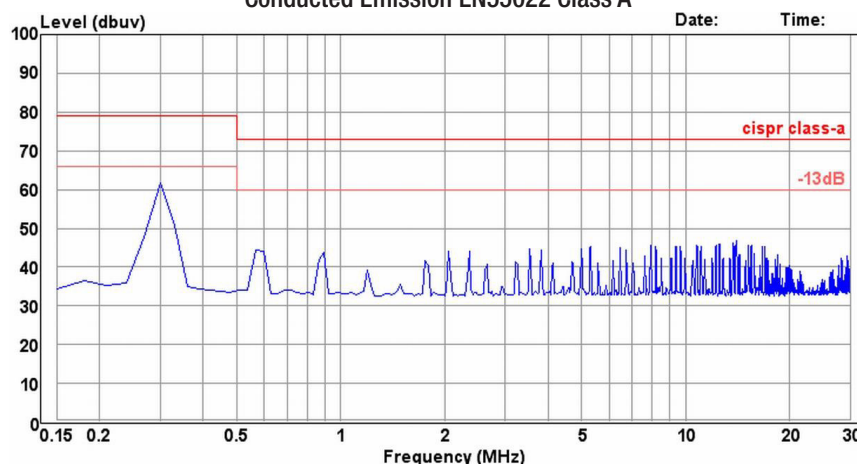


EMI Filtering according to EN55022/11 Class B (24Vin)

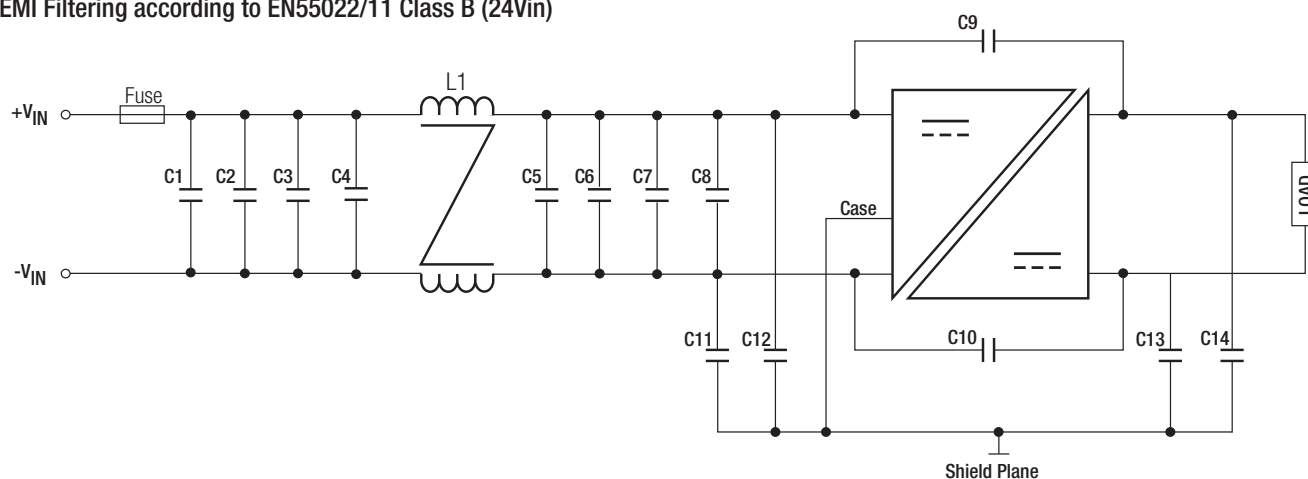

MODEL	C1 to C8	C9, C10, C13, C14	C11, C12	L1
RP90Q-24xxSRW	10 μF , 50V 1812 MLCC	1000pF, 3kV 1808 MLCC	2200pF, 3kV 1812 MLCC	285 μH CMC

RP90Q-2405SRW


Conducted Emission EN55022 Class B

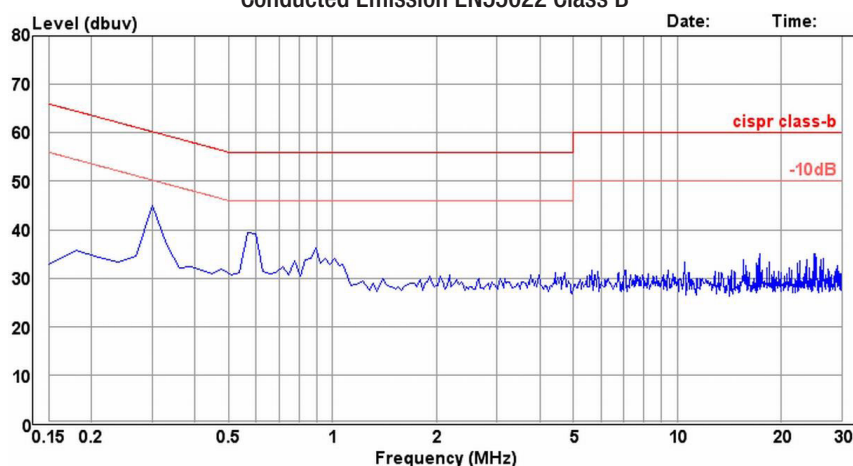

continued on next page

Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)


EMI Filtering according to EN55022/11 Class B (48Vin)

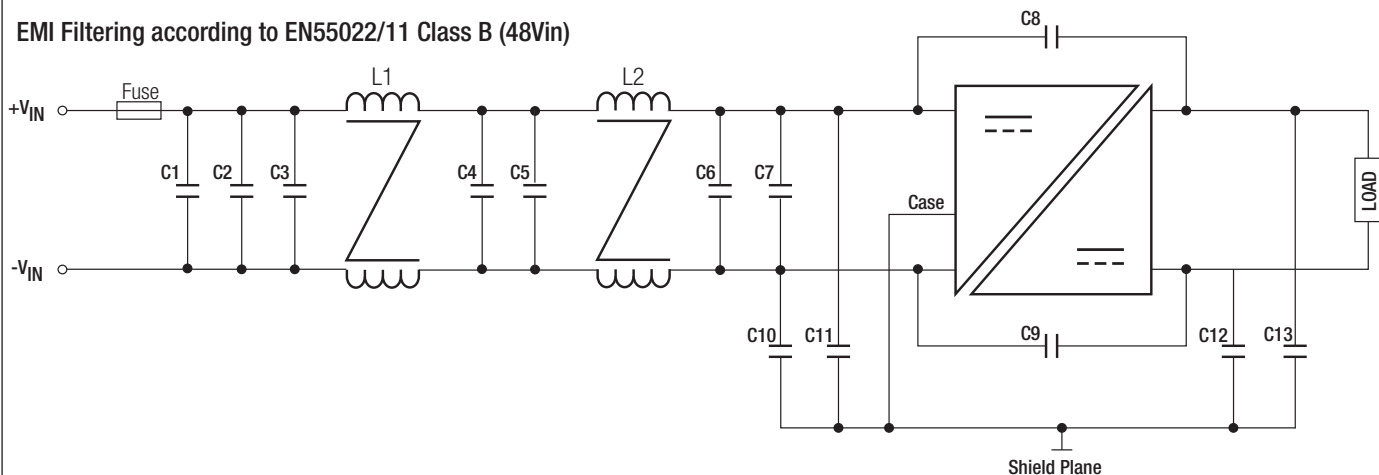


MODEL	C1 to C7	C8 to C13	L1	L2
RP90Q-48xxSRW	4.7 μF , 100V 1812 MLCC	1000pF, 3kV 1808 MLCC	620 μH CMC	285 μH CMC

RP90Q-4805SRW

Conducted Emission EN55022 Class B

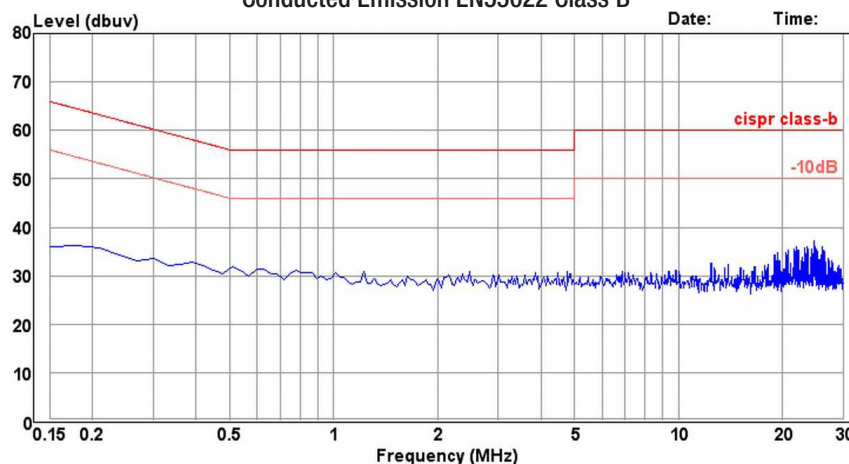

EMI Filtering according to EN55022/11 Class B (110Vin)

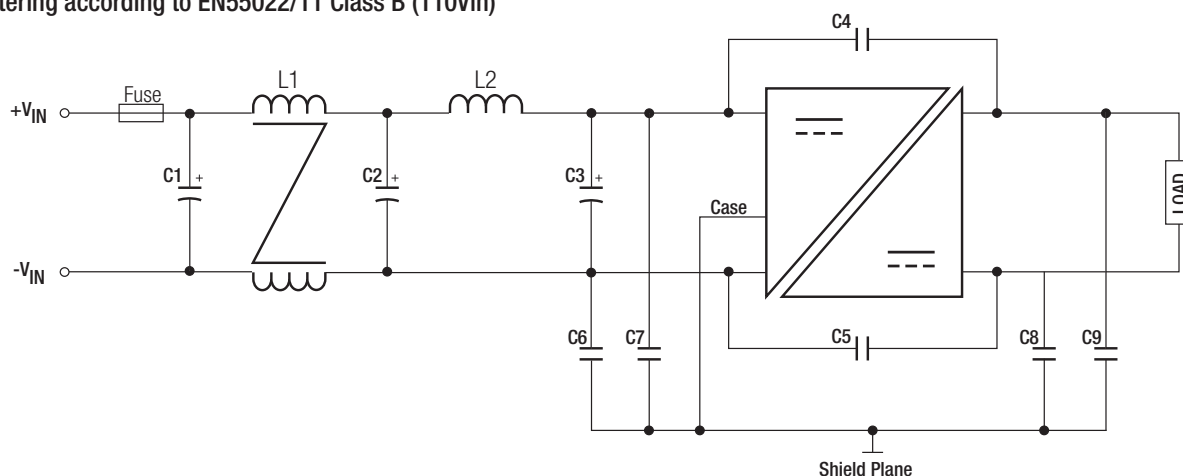


MODEL	C1, C2, C3	C4 to C9	L1	L2
RP90Q-110xxSRW	39 μF , 250V Al cap. (lie down) Rubycon BXF	1000pF, 3kV 1808 MLCC	735 μH CMC	30.1 μH , 5A SMD Inductor

continued on next page

Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

RP90Q-110xxSRW


Conducted Emission EN55022 Class B

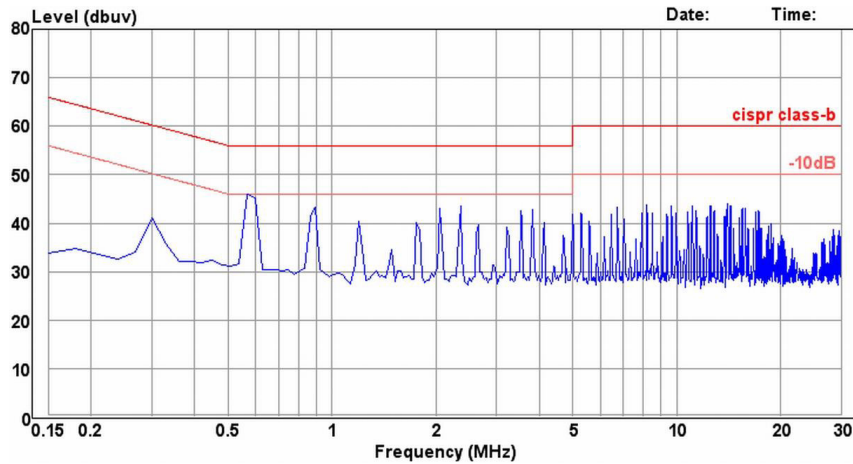

DIMENSIONS and PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Material	Case	Plastic
	Baseplate	Aluminium
	Potting	Silicone (UL94 V-0)
Packaging Dimension (LxWxH)	without Heat-sink	57.9 x 36.6 x 12.7mm
	with Heat-sink	57.9 x 36.6 x 18.8mm
Packaging Weight	without Heat-sink	64g
	with Heat-sink	88g


Dimension Drawing (mm)

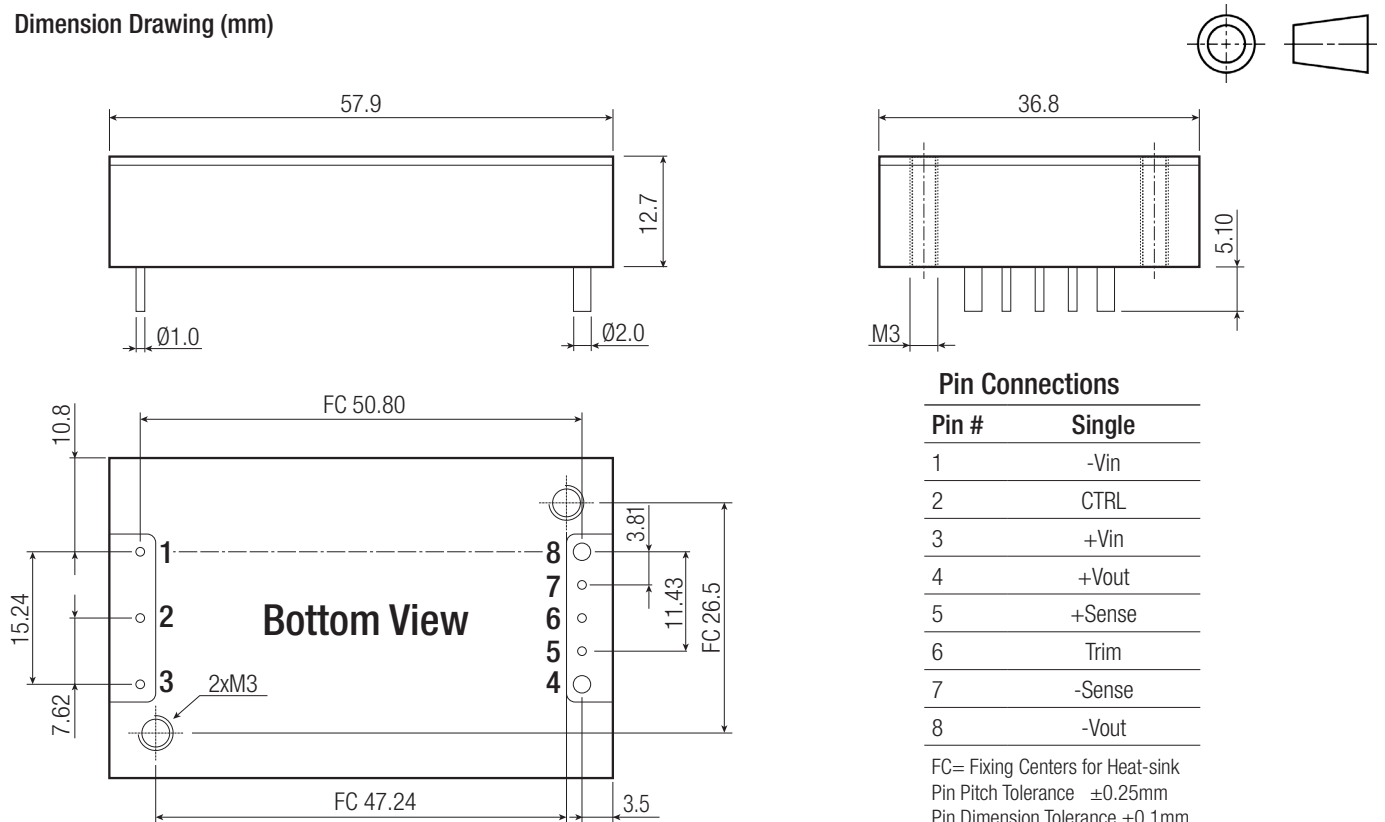

continued on next page



Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

Heat-sink

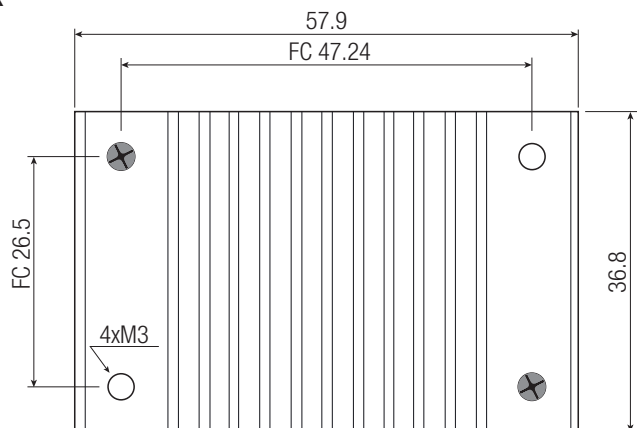

Notes:

Note7: Max. tightening torque for Heat-sink: 0.34Nm

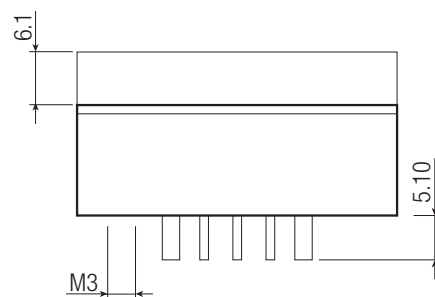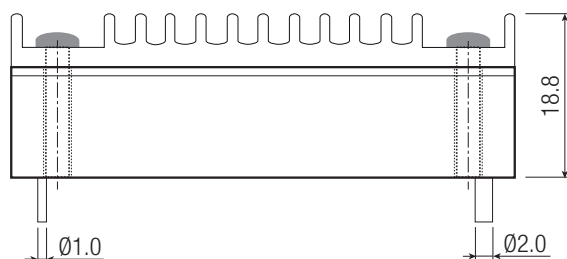

PACKAGING INFORMATION

Parameter	Type	Value
Packaging Dimension	Tray without Heat-sink	157.0 x 88.0 x 12.8mm
	Tray with Heat-sink	157.0 x 88.0 x 24.8mm
Packaging Quantity		2pcs
Storage Temperature Range		-55°C to +125°C
Storage Humidity		5% - 95% RH

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.