



Technical Paper |
mediaCON® USB-C Cable

Content

1 Mechanical.....	3
1.1 Durability Test	3
1.2 Cable Flexing Test	3
1.3 Cable Pull-Out Test.....	3
1.4 4-Axis Continuity Test	3
2 Electrical.....	4
2.1 SuperSpeed Pair Raw Cable Differential Impedance.....	4
2.2 SuperSpeed Pair Mated Connector Differential Impedance	4
2.3 Insertion Loss Fit at Nyquist Frequency: ILfitatNq.....	5
2.4 Integrated Multi-Reflection: IMR.....	6
2.5 Integrated Crosstalk on SS pairs: INEXT and ISSXT	6
2.6 Integrated Crosstalk on SS pairs and D+/D- pairs: IDDXT_1NEXT+FEXT and IDDXT_2NEXT	7
2.7 Integrated Differential Crosstalk D+/D- pairs: IDDXT	7
2.8 Integrated Return Loss: IRL	7
2.9 Differential-to-Common Mode Conversion (SCD12/SCD21).....	8
2.10 D+/D- Pair Attenuation	8
2.11 D+/D- Pair Differential Impedance	9
2.12 D+/D- Pair Propagation Delay	9
2.13 D+/D- Intra-Pair Skew	9
2.14 Coupling between CC and differential USB D+/D-.....	9
2.15 Coupling between VBUS and differential USB D+/D-	10
2.16 Single ended Coupling between SBU_A and CC,SBU_B and CC.....	10
2.17 Single-ended Coupling between CC and D-	10
2.18 Single-ended Coupling between SBU_A and SBU_B	10
2.19 Coupling between SBU_A / SBU_B and differential USB D+/D-	11
2.20 Voltage Drop Test	11

Technical Paper – mediaCON USB-C Cable

Title: NTP10

© NEUTRIK AG. All rights reserved.

Subject:

This technical paper covers the general NEUTRIK USB 3.1 Type-C cable requirements of mechanical, electrical, environmental and performance characteristics.

This documentation describes the results of the test series conducted at Neutrik AG and USB-C cable manufacturer.

The tests were carried out in accordance with the following Standard regulations:

- ANSI/EIA 364-C

Electrical Connector/Socket Test Procedures Including Environmental Classifications, approved 1994. Available in hard copy – reference search site <http://www.nssn.org/information.html>

- EIA-364-1000.01

Environmental Test Methodology for Assessing the Performance of Electrical Connectors and Sockets Used in Business Office Applications

- USB 2.0

Universal Serial Bus Specification, Revision 2.0. This specification is available on the World Wide Web site <http://www.usb.org>

- USB 3.1

Universal Serial Bus Specification, revision 3.1. This specification is available on the World Wide Web site <http://www.usb.org>.

- USB Type-C

Universal Serial Bus Type-C Cable Specification, Revision 1.1 (also referred to as the USB Type-C Specification). This specification is available on the World Wide Web site <http://www.usb.org>.

NEUTRIK AG is not to be held liable for statements and declarations given in this technical paper.

NEUTRIK AG explicitly exonerates itself from all liability for mistakes in this white paper.



1 Mechanical

1.1 Durability Test

Test Conditions	Performance Requirement
<p>EIA 364-09</p> <p>The durability test shall be done at a maximum rate of 200 cycles per hour and no physical damage to any part of the connector and cable assembly shall occur.</p>	<p>For all cable assembly :</p> <p>USB Type-C: 10'000 cycles</p> <ul style="list-style-type: none"> • Insertion Force: 20 N Max. • Extraction Force: 6 N to 20 N

1.2 Cable Flexing Test

Test Conditions	Performance Requirement
<p>EIA 364-41, Condition 1</p> <p>Dimension X= 3.7 times cable diameter and 100 cycles in each of two planes 120 degree arc.</p>	<ol style="list-style-type: none"> 1. No physical damage. 2. No discontinuity over 1 microsecond during flexing.

1.3 Cable Pull-Out Test

Test Conditions	Performance Requirement
<p>EIA 364-38, Test Condition A</p> <p>The cable assembly shall be subjected to a 40 N axial load for a minimum of 1 minute.</p>	<ol style="list-style-type: none"> 1. No physical damage. 2. No electrical discontinuity over 1 microsecond to the cable assembly.

1.4 4-Axis Continuity Test

Test Conditions	Performance Requirement
<p>The USB Type-C connector family shall be tested for continuity under stress using the test configurations shown below</p>	<p>Test in 4 different directions (left, right, up, down) Fixture device at 90 degree angle 8 N tensile force shall be applied to the cable in a downward direction, perpendicular to the axis of insertion, for a period of at least 10 seconds.</p>

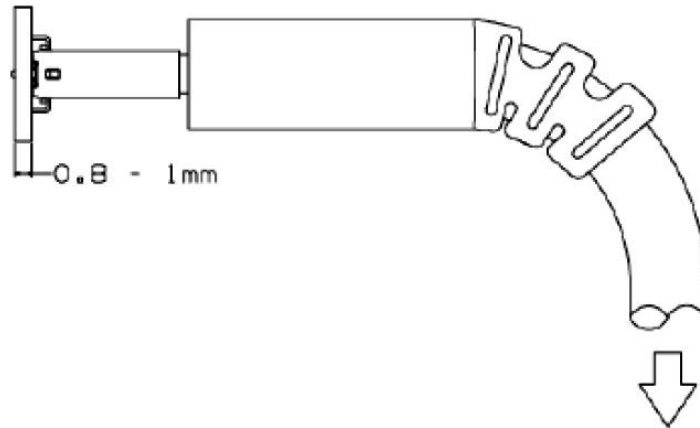


figure 1: Axis Continuity Test

2 Electrical

2.1 SuperSpeed Pair Raw Cable Differential Impedance

Test Conditions

The SuperSpeed pair impedance is measured at the rise time to be 200 ps (10%-90%) entering the reference plane.

Performance Requirement

For all cable assembly:

- 85 Ω to 95 Ω for Gen.2 application
- 83 Ω to 97 Ω for Gen.1 application

2.2 SuperSpeed Pair Mated Connector Differential Impedance

Test Conditions

The differential impedance is measured at the defined rise time entering the reference plane. The definition of rise time:

- 40ps (20%-80%) for Gen.2 speed
- 50ps (20%-80%) for Gen.1 speed

Performance Requirement

For all cable assembly :
USB Type-C: 85 $\Omega \pm 9 \Omega$

2.3 Insertion Loss Fit at Nyquist Frequency: ILfitatNq

Test Conditions	Performance Requirement
<p>Normalized with mated connector $85\pm 9 \ \Omega$ and raw cable $90\pm 5 \ \Omega$ differential impedance.</p>	<p>Type-C to Type-C:</p> <ul style="list-style-type: none"> For all USB 3.1 Gen.2 pairs: <ul style="list-style-type: none"> $\geq -4 \text{ dB}$ at 2.5 GHz $\geq -6 \text{ dB}$ at 5 GHz $\geq -11 \text{ dB}$ at 10 GHz For USB 3.1 Gen.1 cable assembly: <ul style="list-style-type: none"> $\geq -7 \text{ dB}$ at 2.5 GHz $\geq -12 \text{ dB}$ at 5 GHz Type-C to Legacy Cable: <ul style="list-style-type: none"> $\geq -4 \text{ dB}$ at 2.5GHz, $\geq -6 \text{ dB}$ at 5GHz, Type-C to Legacy Adaptor: <ul style="list-style-type: none"> $\geq -4 \text{ dB}$ at 2.5 GHz $\geq -3.5 \text{ dB}$ at 5 GHz

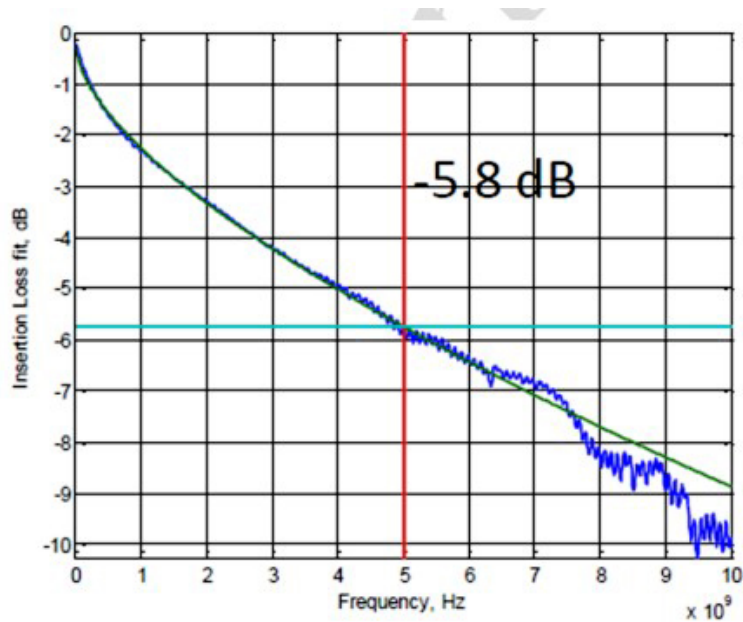


figure 2: Illustration of Insertion Loss

2.4 Integrated Multi-Reflection: IMR

Test Conditions

It measures the ripple of the insertion loss, caused by multiple reflections inside the cable assembly (mated with the fixture).

$V_{in}(f)$ is the input trapezoidal pulse spectrum with $T_b = \text{Unit interval} = 100 \text{ ps}$, $T_r = 0 \text{ to } 100\% \text{ rise time} = 0.4 * T_b$

Performance Requirement

The IMR limit is specified as a function of $IL_{fitatNq}$:

- Type-C to Type-C:
 $IMR \leq 0.126 * IL_{fitatNq}^2 + 3.024 * IL_{fitatNq} - 23.392$ in dB.
- Type-C to Legacy:
 $IMR \leq 0.126 * IL_{fitatNq}^2 + 3.024 * IL_{fitatNq} - 21.392$ in dB.
- Type-C to Legacy Adaptor:
 $IMR \leq -34 \text{ dB}$ for $T_b = 200 \text{ ps}$ and $\leq -27 \text{ dB}$ for $T_b = 100 \text{ ps}$.

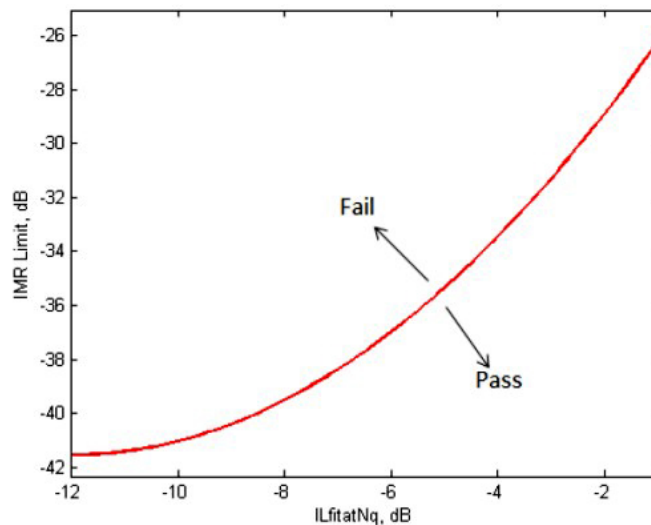


figure 3: IMR Limit as Function of $IL_{fitatNq}$

2.5 Integrated Crosstalk on SS pairs: INEXT and ISSXT

Test Conditions

The integration shall be done for each NEXT and FEXT between USB SuperSpeed pairs.

Performance Requirement

The IMR limit is specified as a function of $IL_{fitatNq}$:

- Type-C to Type-C:
 $INEXT \leq -40 \text{ dB to } 12.5 \text{ GHz}$
 $IFEXT \leq -40 \text{ dB to } 12.5 \text{ GHz}$
- Type-C to Legacy:
 $ISSXT \leq -38 \text{ dB}$
- Type-C to Legacy Adaptor:
 $ISSXT \leq -37 \text{ dB}$

2.6 Integrated Crosstalk on SS pairs and D+/D- pairs: IDDXT_1NEXT+FEXT and IDDXT_2NEXT

Test Conditions	Performance Requirement
<p>The integration shall be done for each NEXT and FEXT between USB SuperSpeed pairs.</p>	<ul style="list-style-type: none"> Type-C to Type-C: $IDDXT_1NEXT+FEXT \leq -34.5 \text{ dB}$ $IDDXT_2NEXT \leq -33 \text{ dB}$ <p>For all SuperSpeed pairs.</p>

2.7 Integrated Differential Crosstalk D+/D- pairs: IDDXT

Test Conditions	Performance Requirement
<p>The integration shall be done for each NEXT and FEXT between USB HighSpeed pairs.</p>	<ul style="list-style-type: none"> Type-C to Legacy Adapter: $\leq -23 \text{ dB}$

2.8 Integrated Return Loss: IRL

Test Conditions	Performance Requirement
<p>The integrated return loss manages the reflection between the cable assembly and the rest of the system (host and device).</p>	<p>The IRL limit is specified as a function of ILfitatNq :</p> <ul style="list-style-type: none"> Type-C to Type-C: $IRL \leq 0.046 * ILfitatNq^2 + 1.812 * ILfitatNq - 10.784 \text{ in dB}$ Type-C to Legacy: $IRL \leq 0.046 * ILfitatNq^2 + 1.812 * ILfitatNq - 9.784 \text{ in dB}$ Type-C to Legacy Adaptor: $IRL \leq -14.5 \text{ dB}$ for $Tb=200 \text{ ps}$ and $\leq -12 \text{ dB}$ for $Tb=100 \text{ ps}$.

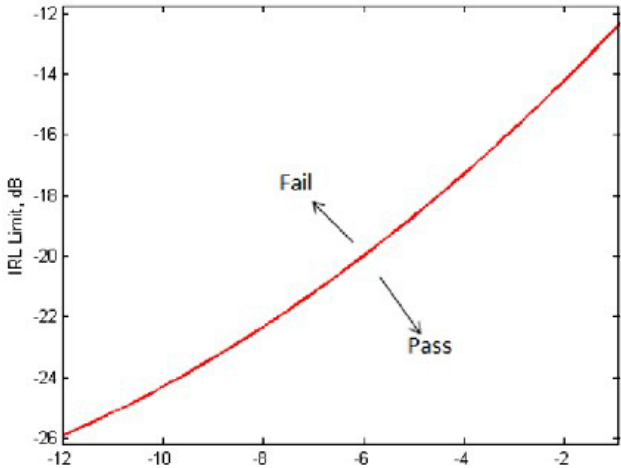


figure 4: IRL Limit at Function of ILfitatNq

2.9 Differential-to-Common Mode Conversion (SCD12/SCD21)

Test Conditions	Performance Requirement
Normalized with mated connector $85\pm 9 \Omega$ and raw cable $90\pm 5 \Omega$ differential impedance.	<ul style="list-style-type: none"> Type-C to Type-C: SCD12 ≤ -20 dB from 100 MHz to 10 GHz Type-C to Legacy: SCD12 ≤ -20 dB from 100 MHz to 10 GHz Type-C to Legacy Adaptor: SCD12 ≤ -15 dB from 100 MHz to 7.5 GHz

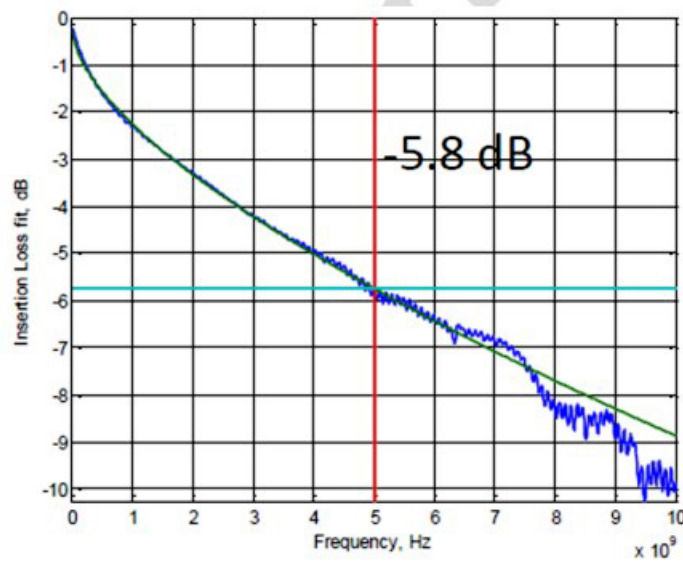


figure 5: Differential-to-Common Mode Conversion Requirement

2.10 D+/D- Pair Attenuation

Test Conditions	Performance Requirement
<p>EIA 364-101</p> <p>The measured frequency range should be from 50 MHz to 400 MHz with a frequency step of 10 MHz.</p>	<ul style="list-style-type: none"> Type-C to Type-C: <ul style="list-style-type: none"> ≥ -1.02 dB at 50 MHz ≥ -1.43 dB at 100 MHz ≥ -2.4 dB at 200 MHz ≥ -4.35 dB at 400 MHz Type-C to Legacy: <ul style="list-style-type: none"> ≥ -1.02 dB at 50 MHz ≥ -1.43 dB at 100 MHz ≥ -2.4 dB at 200 MHz ≥ -4.35 dB at 400 MHz Type-C to Legacy Adaptor: <ul style="list-style-type: none"> ≥ -0.7 dB at 400 MHz

2.11 D+/D- Pair Differential Impedance

Test Conditions	Performance Requirement
<p>The D+/D- pair impedance is measured at the rise time to be 400 ps (20%-80%) entering the reference plane.</p>	<p>75 Ω to 105 Ω</p>

2.12 D+/D- Pair Propagation Delay

Test Conditions	Performance Requirement
<p>EIA 364-103</p> <p>The D+/D- pair propagation delay is measured at the rise time to be 400 ps (20%-80%) entering the reference plane.</p> <p>The propagation delay is measured at the 50% voltage crossing of the received step response.</p>	<ul style="list-style-type: none"> Type-C to Type-C: 20 ns max

2.13 D+/D- Intra-Pair Skew

Test Conditions	Performance Requirement
<p>EIA 364-103</p> <p>The D+/D- pair propagation delay is measured at the rise time to be 400 ps (20%-80%) entering the reference plane.</p> <p>The intra-pair skew is measured at the 50% voltage crossing of the received step response.</p>	<ul style="list-style-type: none"> Type-C to Type-C: 100 ps max Type-C to Legacy: 100 ps max Type-C to Legacy Adaptor: 20 ps max

2.14 Coupling between CC and differential USB D+/D-

Test Conditions	Performance Requirement
<p>EIA 364-90</p> <p>The frequency range is from 300 KHz to 100 MHz. All the measured S-parameters are single-ended with a 50 Ω reference impedance.</p>	<ul style="list-style-type: none"> Type-C to Type-C: ≤ -60.5 dB at 0.3 MHz ≤ -50 dB at 1 MHz ≤ -26 dB at 16 MHz ≤ -26 dB at 100 MHz

2.15 Coupling between VBUS and differential USB D+/D-

Test Conditions	Performance Requirement
<p>EIA 364-90</p> <p>The frequency range is from 300 KHz to 100 MHz. All the measured S-parameters are single-ended with a 50 Ω reference impedance.</p>	<ul style="list-style-type: none"> Type-C to Type-C: <ul style="list-style-type: none"> ≤ -40 dB for $0.3 \text{ MHz} < f \leq 30 \text{ MHz}$, and $\leq 19.12 \log_{10}(f/30) - 40$ (in dB) for $30 \text{ MHz} < f \leq 100 \text{ MHz}$

2.16 Single ended Coupling between SBU_A and CC,SBU_B and CC

Test Conditions	Performance Requirement
<p>EIA 364-90</p> <p>The frequency range is from 300 KHz to 100 MHz. All the measured S-parameters are single-ended with a 50 Ω reference impedance.</p>	<ul style="list-style-type: none"> Type-C to Type-C: <ul style="list-style-type: none"> ≤ -65 dB at 0.3 MHz ≤ -55 dB at 1 MHz ≤ -30 dB at 18 MHz ≤ -30 dB at 100 MHz

2.17 Single-ended Coupling between CC and D-

Test Conditions	Performance Requirement
<p>EIA 364-90</p> <p>The frequency range is from 300 KHz to 100 MHz. All the measured S-parameters are single-ended with a 50 Ω reference impedance.</p>	<ul style="list-style-type: none"> For USB 2.0 Type-C to Type-C: <ul style="list-style-type: none"> ≤ -65 dB at 0.3 MHz ≤ -55 dB at 1 MHz ≤ -30 dB at 18 MHz ≤ -30 dB at 100 MHz For USB Full-Featured Type-C to Type-C <ul style="list-style-type: none"> ≤ -58 dB at 0.3 MHz ≤ -27.5 dB at 10 MHz ≤ -26 dB at 11.8 MHz ≤ -26 dB at 100 MHz

2.18 Single-ended Coupling between SBU_A and SBU_B


Test Conditions	Performance Requirement
<p>EIA 364-90</p> <p>The frequency range is from 300 KHz to 100 MHz. All the measured S-parameters are single-ended with a 50 Ω reference impedance.</p>	<ul style="list-style-type: none"> For Type-C to Type-C: <ul style="list-style-type: none"> ≤ -56.5 dB at 0.3 MHz ≤ -46 dB at 1 MHz ≤ -26 dB at 10 MHz ≤ -25 dB at 11.2 MHz ≤ -25 dB at 100 MHz

2.19 Coupling between SBU_A / SBU_B and differential USB D+/D-

Test Conditions	Performance Requirement
<p>EIA 364-90</p> <p>The frequency range is from 300 KHz to 100 MHz. All the measured S-parameters are single-ended with a 50 Ω reference impedance.</p>	<ul style="list-style-type: none"> For Type-C to Type-C: <ul style="list-style-type: none"> ≤ -80 dB at 0.3 MHz ≤ -40 dB at 30 MHz ≤ -40 dB at 100 MHz

2.20 Voltage Drop Test

Test Conditions	Performance Requirement
<p>The maximum rated VBUS current of the cable assembly shall be used.</p> <p>The measurement includes receptacles at both ends of the cable assembly, mounted on test fixtures.</p>	<p>250 mV max for GND and 500 mV max for VBUS.</p>

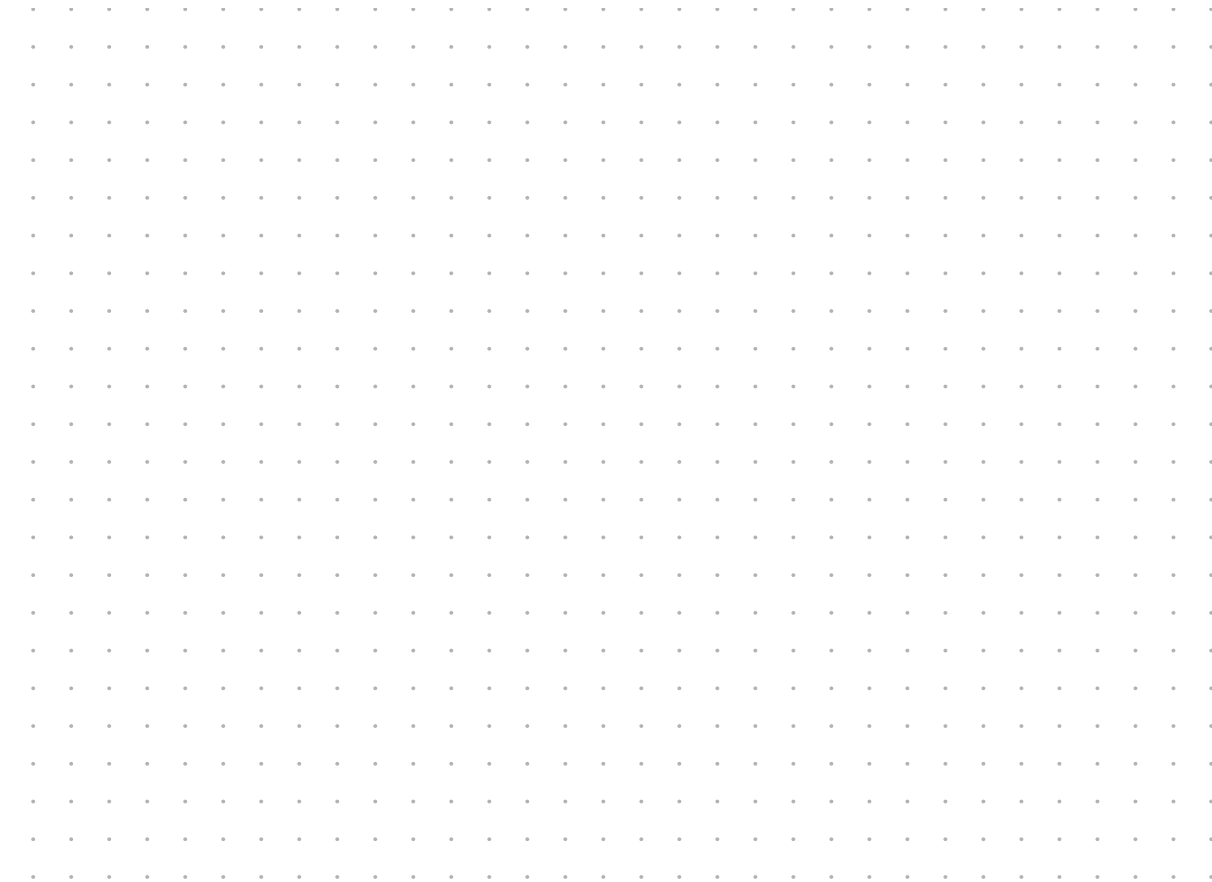

Liechtenstein (Headquarters)

Neutrik AG, Im alten Riet 143, 9494 Schaan
T +423 237 24 24, F +423 232 53 93, neutrik@neutrik.com

Germany / Netherlands / Denmark / Austria

Neutrik Vertriebs GmbH, Felix-Wankel-Strasse 1, 85221 Dachau, Germany
T +49 8131 28 08 90, neutrik@neutrik.de

Great Britain

Neutrik (UK) Ltd., Westridge Business Park, Cothey Way
Ryde, Isle of Wight PO33 1 QT
T +44 1983 811 441, sales@neutrik.co.uk

France

Neutrik France SARL, 52 rue d'aguesseau, 1er etage, 92100 Boulogne-Billancourt
T +33 1 41 31 67 50, info@neutrik.fr

USA

Neutrik USA Inc., 4115 Taggart Creek Road, Charlotte, North Carolina, 28208
T +1 704 972 30 50, info@neutrikusa.com

Japan

Neutrik Limited, Yusen-Higashinohonbashi-Ekimaie Bldg., 3-7-19
Higashinohonbashi, Chuo-ku, Tokyo 103
T +81 3 3663 47 33, mail@neutrik.co.jp

Hong Kong

Neutrik Hong Kong LTD., Suite 18, 7th Floor Shatin Galleria
Fotan, Shatin
T +852 2687 6055, sales@neutrik.com.hk

China

Ningbo Neutrik Trading Co., Ltd., Shiqi Street, Yinxian Road West
Fengjia Villiage, Yinzhou Area, Ningbo, Zhejiang, 315153
T +86 574 88250488 800, sales@neutrik.com.cn

India

Neutrik India Pvt. Ltd., Level 3, Neo Vikram, New Link Road,
Above Audi Show Room, Andheri West, Mumbai, 400058
T +91 982 05 43 424, anklesaria@neutrik.com

ASSOCIATED COMPANIES

Contrik AG

Steinackerstrasse 35, 8902 Urdorf, Switzerland
T +41 44 736 50 10, contrik@contrik.ch

H. Adam GmbH

Felix-Wankel-Straße 1, 85221 Dachau, Germany
T +49 08131 28 08-0, anfrage@adam-gmbh.de

