



Description

The is a silicon epitaxial-base NPN power transistors in monolithic Darlington configuration and are mounted in JEDEC TO-3 metal case. They are intended for use in power linear and switching applications.

Absolute Maximum Ratings


Parameter	Symbol	Values	Unit
Collector-Base Voltage ($I_E = 0$)	V_{CB0}	80	V
Collector-Emitter Voltage ($I_B = 0$)	V_{CEO}		
Emitter-Base Voltage ($I_C = 0$)	V_{EBO}		
Collector Current	I_C	10	A
Base Current	I_B	0.2	
Total Dissipation at $T_c \leq 25^\circ\text{C}$	P_{TOT}	150	W
Storage Temperature	T_{STG}	-65 to +200	°C
Maximum Operating Junction Temperature	T_J	200	

Electrical Characteristics ($T_{CASE} = 25^\circ\text{C}$ unless otherwise specified)


Parameter	Test Conditions	Symbol	Min.	Max.	Unit
Collector Cut-off Current ($R_{BE} = 1\text{k}\Omega$)	$V_{CE} = 80\text{V}$ $T_{CASE} = 150^\circ\text{C}$ $V_{CE} = 80\text{V}$	I_{CER}	-	1 5	μA
Collector Cut-off Current ($I_B = 0$)	$V_{CE} = 30\text{V}$ $V_{CE} = 40\text{V}$	I_{CEO}	-	1 1	
Emitter Cut-off Current ($I_C = 0$)	$V_{EB} = 5\text{V}$	I_{EBO}	-	2	-
Collector-Emitter Sustaining Voltage ($I_B = 0$)	$I_C = 100\text{mA}$	$V_{CEO(sus)}^*$	80	-	V
Collector-Emitter Saturation Voltage	$I_C = 5\text{A}$ $I_B = 20\text{mA}$ $I_C = 10\text{A}$ $I_B = 50\text{mA}$	$V_{CE(sat)}^*$	-	2 4	
Base-Emitter Voltage	$I_C = 5\text{A}$ $V_{CE} = 3\text{V}$	V_{BE}^*	-	3	
DC Current Gain	$I_C = 5\text{A}$ $V_{CE} = 3\text{V}$	h_{FE}^*	1,000	-	

*Pulsed : Pulse Duration = 300 μs , Duty Cycle 1.5%


TO-3



Internal Schematic Diagram

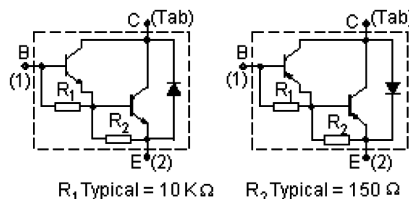

Diagram

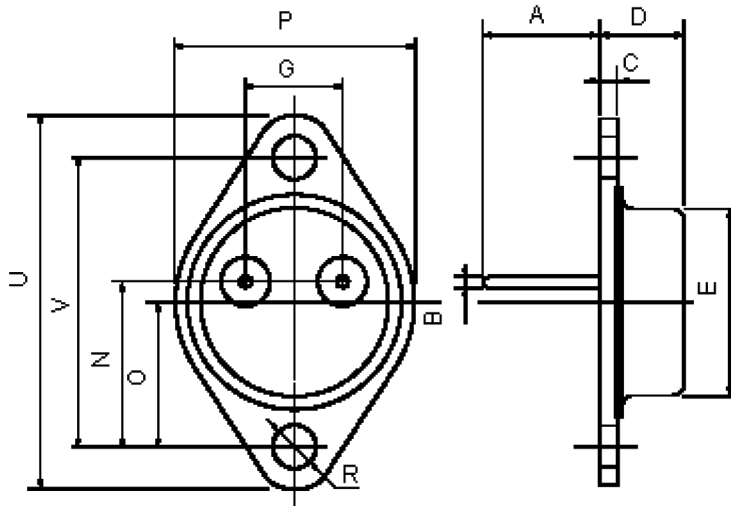

TO-3 Mechanical Data

Dimensions	Minimum	Maximum
A	11 (0.433)	13.1 (0.516)
B	0.97 (0.038)	1.15 (0.045)
C	1.5 (0.59)	1.65 (0.065)
D	8.32 (0.327)	8.92 (0.351)
E	19 (0.748)	20 (0.787)
G	10.7 (0.421)	11.1 (0.437)
N	16.5 (0.649)	17.2 (0.677)
P	25 (0.984)	26 (1.023)
R	4 (0.157)	4.09 (0.161)
U	38.5 (1.515)	39.3 (1.547)
V	30 (1.187)	30.3 (1.193)

Dimensions : Millimetres (Inches)

Part Number Table

Description	Part Number
Darlington Transistor, TO-3	MJ3001

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.