



# CSM-WP117A1P

CSM

COLOR SENSORS

**SICK**  
Sensor Intelligence.



Illustration may differ



## Ordering information

| Type         | Part no. |
|--------------|----------|
| CSM-WP117A1P | 1097438  |

Other models and accessories → [www.sick.com/CSM](http://www.sick.com/CSM)

## Detailed technical data

### Features

|                                   |                                 |
|-----------------------------------|---------------------------------|
| <b>Dimensions (W x H x D)</b>     | 12 mm x 31.5 mm x 21 mm         |
| <b>Sensing distance</b>           | ≤ 12.5 mm                       |
| <b>Sensing distance tolerance</b> | ± 3 mm                          |
| <b>Housing design</b>             | Small                           |
| <b>Light source</b>               | LED, RGB <sup>1)</sup>          |
| <b>Wave length</b>                | 640 nm, 525 nm, 470 nm          |
| <b>Light spot size</b>            | 1.5 mm x 6.5 mm                 |
| <b>Light spot direction</b>       | Vertical                        |
| <b>Adjustment</b>                 | Teach-in button, cable, IO-Link |
| <b>Teach-in mode</b>              | Static 1-point teach-in         |

<sup>1)</sup> Average service life: 100,000 h at T<sub>J</sub> = +25 °C.

### Mechanics/electronics

|                            |                                   |
|----------------------------|-----------------------------------|
| <b>Supply voltage</b>      | 12 V DC ... 24 V DC <sup>1)</sup> |
| <b>Ripple</b>              | < 5 V <sub>pp</sub> <sup>2)</sup> |
| <b>Current consumption</b> | < 50 mA <sup>3)</sup>             |
| <b>Switching frequency</b> | 1.7 kHz <sup>4)</sup>             |

<sup>1)</sup> Limit values: DC 12 V (-10 %) ... DC 24 V (+20 %). Operation in short-circuit protected network max. 8 A.

<sup>2)</sup> May not exceed or fall below U<sub>v</sub> tolerances.

<sup>3)</sup> Without load.

<sup>4)</sup> With light/dark ratio 1:1.

<sup>5)</sup> Signal transit time with resistive load.

<sup>6)</sup> At supply voltage > 24 V, I<sub>max</sub> = 50 mA. I<sub>max</sub> is consumption count of all Q<sub>N</sub>.

|   |   |
|---|---|
| <b>Response time</b>                        | 300 $\mu$ s <sup>5)</sup>   |
| <b>Jitter</b>                               | 150 $\mu$ s   |
| <b>Switching output</b>                     | PNP   |
| <b>Switching output (voltage)</b>           | PNP: HIGH = $U_V \leq 2$ V / LOW approx. 0 V  |
| <b>Switching mode</b>                       | Light/dark switching  |
| <b>Output (channel)</b>                     | 8 colors via IO-Link  |
| <b>Output current <math>I_{max}</math>.</b> | < 100 mA <sup>6)</sup>  |
| <b>Connection type</b>                      | Male connector M8, 4-pin  |
| <b>Protection class</b>                     | III   |
| <b>Circuit protection</b>                   | $U_V$ connections, reverse polarity protected<br>Output Q short-circuit protected<br>Interference pulse suppression |
| <b>Enclosure rating</b>                     | IP67  |
| <b>Weight</b>                               | Approx. 20 g  |
| <b>Housing material</b>                     | Plastic, ABS  |
| <b>Optics material</b>                      | Plastic, PMMA   |

1) Limit values: DC 12 V (-10 %) ... DC 24 V (+20 %). Operation in short-circuit protected network max. 8 A.

2) May not exceed or fall below  $U_V$  tolerances.

3) Without load.

4) With light/dark ratio 1:1.

5) Signal transit time with resistive load.

6) At supply voltage > 24 V,  $I_{max} = 50$  mA.  $I_{max}$  is consumption count of all  $Q_n$ .

## Communication interface

|                                 |  |
|---------------------------------|--|
| <b>IO-Link</b>                  | ✓, V1.1  |
| Data transmission rate          | 38,4 kbit/s (COM2)   |
| Cycle time                      | 2.3 ms   |
| VendorID                        | 26   |
| DeviceID HEX                    | 800071   |
| DeviceID DEC                    | 8388721  |
| Process data length             | 16 Bit   |
| <b>Process data structure A</b> | Bit 0 = switching signal $Q_{L1}$<br>Bit 1 = switching signal $Q_{L2}$<br>Bit 2 = Quality of Run Alarm<br>Bit 3 ... 5 = Emission Color<br>Bit 6 ... 15 = Measurement Value RGB   |
| <b>Process data structure B</b> | Bit 0 = switching signal $Q_{L1}$<br>Bit 1 = switching signal $Q_{L2}$<br>Bit 2 = switching signal $Q_{L3}$<br>Bit 3 = switching signal $Q_{L4}$<br>Bit 4 = switching signal $Q_{L5}$<br>Bit 5 = switching signal $Q_{L6}$<br>Bit 6 = switching signal $Q_{L7}$<br>Bit 7 = switching signal $Q_{L8}$<br>Bit 9 ... 15 = empty |
| <b>Digital output</b>           | $Q_1, Q_2$   |
| Number                          | 2  |

Ambient data

|                                      |                              |
|--------------------------------------|------------------------------|
| <b>Ambient operating temperature</b> | -10 °C ... +55 °C            |
| <b>Ambient temperature, storage</b>  | -20 °C ... +75 °C            |
| <b>Shock load</b>                    | According to IEC 60068       |
| <b>UL File No.</b>                   | NRKH.E348498 & NRKH7.E348498 |


Classifications

|                       |          |
|-----------------------|----------|
| <b>ECLASS 5.0</b>     | 27270907 |
| <b>ECLASS 5.1.4</b>   | 27270907 |
| <b>ECLASS 6.0</b>     | 27270907 |
| <b>ECLASS 6.2</b>     | 27270907 |
| <b>ECLASS 7.0</b>     | 27270907 |
| <b>ECLASS 8.0</b>     | 27270907 |
| <b>ECLASS 8.1</b>     | 27270907 |
| <b>ECLASS 9.0</b>     | 27270907 |
| <b>ECLASS 10.0</b>    | 27270907 |
| <b>ECLASS 11.0</b>    | 27270907 |
| <b>ECLASS 12.0</b>    | 27270907 |
| <b>ETIM 5.0</b>       | EC001817 |
| <b>ETIM 6.0</b>       | EC001817 |
| <b>ETIM 7.0</b>       | EC001817 |
| <b>ETIM 8.0</b>       | EC001817 |
| <b>UNSPSC 16.0901</b> | 39121528 |

Connection/Pin assignment

|                        |                          |
|------------------------|--------------------------|
| <b>Connection type</b> | Male connector M8, 4-pin |
| <b>Pin assignment</b>  |                          |
| BN 1                   | + (L+)                   |
| WH 2                   | Q                        |
| BU 3                   | -(M)                     |
| BK 4                   | Q/C                      |


**Dimensional drawing** (Dimensions in mm (inch))

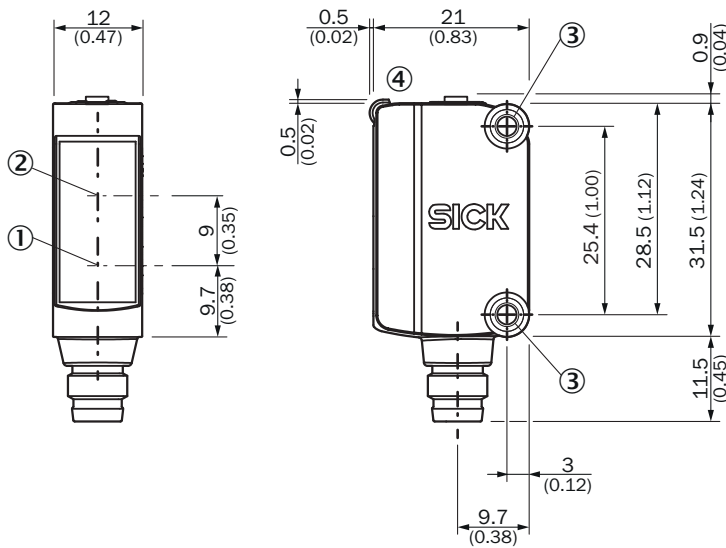

- ① Center of optical axis, sender
- ② Center of optical axis, receiver
- ③ Mounting holes M3
- ④ Display and adjustment elements

**Adjustments**


Display and adjustment elements



- ① Teach-in button
- ② LED yellow
- ③ LED green

**Pin assignment**

Connection type. see table: Connection/PIN assignment




Male connector, M8, 4-pin, uncoded

**Concept of operation**


Setting the switching threshold

**1. Trigger teach-in**

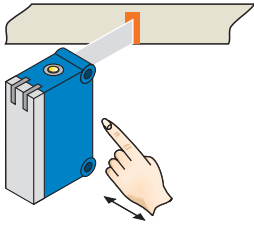


Position object in light field.  
 Press teach-in button > 1 s.

**2. Select color tolerance**

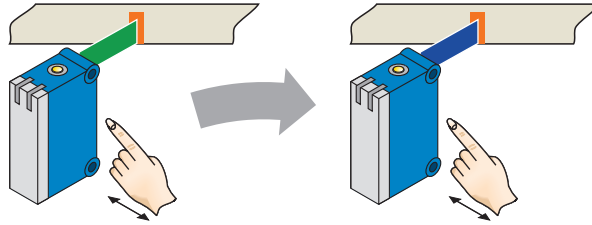

Press teach-in button when transmitted light is green  
 = **tolerance medium**  
 (standard setting).

Press teach-in button when transmitted light is blue  
 = **tolerance precise.**

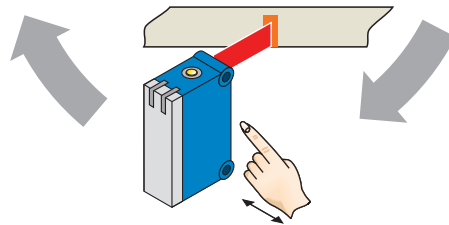


Press teach-in button when transmitted light is red  
 = **tolerance coarse.**

Teach-in can also be performed using an external control signal (only dynamic teach-in).





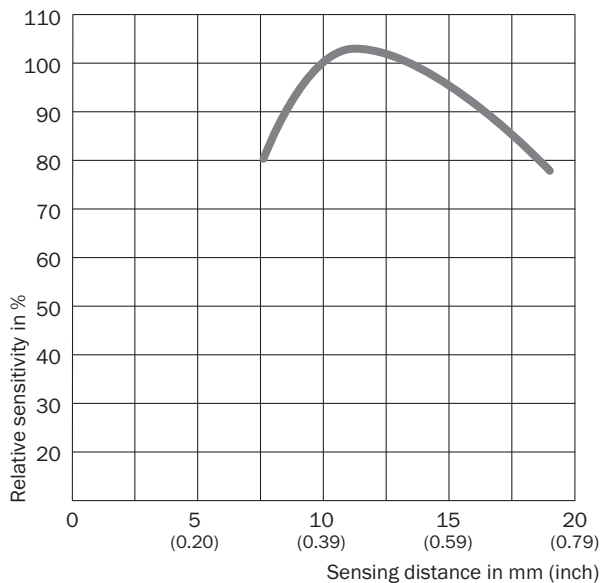


Keylock activation and deactivation: hold down teach-in button > 30 s.

**Sensing distance**



## Recommended accessories

Other models and accessories → [www.sick.com/CSM](http://www.sick.com/CSM)

|   | Brief description  | Type                                 | Part no. |
|---|--|--------------------------------------|----------|
| <b>Cloning modules</b>  |  |                                      |          |
|    | IO-Link version V1.1, Port class 2, PIN 2, 4, 5 galvanically connected, Supply voltage 18 V DC ... 32 V DC (limit values, operation in short-circuit protected network max. 8 A)   | IOLP2ZZ-M3201<br>(SICK Memory Stick) | 1064290  |
|    | IO-Link V1.1 Class A port, USB2.0 port, optional external power supply 24V / 1A  | IOLA2US-01101<br>(SiLink2 Master)    | 1061790  |
| <b>Mounting brackets and plates</b>   |  |                                      |          |
|    | Stainless steel (1.4301)   | BEF-WN-G6                            | 2062909  |
| <b>Plug connectors and cables</b>   |  |                                      |          |
|    | <ul style="list-style-type: none"> <li>• <b>Connection type head A:</b> Female connector, M8, 4-pin, straight, A-coded</li> <li>• <b>Connection type head B:</b> Flying leads</li> <li>• <b>Signal type:</b> Sensor/actuator cable</li> <li>• <b>Cable:</b> 5 m, 4-wire, PVC</li> <li>• <b>Description:</b> Sensor/actuator cable, unshielded</li> <li>• <b>Application:</b> Zones with chemicals</li> </ul>   | YF8U14-050VA3XLEAX                   | 2095889  |
|   | <ul style="list-style-type: none"> <li>• <b>Connection type head A:</b> Male connector, M8, 4-pin, straight</li> <li>• <b>Description:</b> Unshielded</li> <li>• <b>Connection systems:</b> Screw-type terminals</li> <li>• <b>Permitted cross-section:</b> 0.14 mm<sup>2</sup> ... 0.5 mm<sup>2</sup></li> </ul>  | STE-0804-G                           | 6037323  |
| <b>Sensor Integration Gateway</b>   |  |                                      |          |
|  | <ul style="list-style-type: none"> <li>• <b>Further functions:</b> Web server integrated, USB connection for easy configuration of the SIG200 Sensor Integration Gateway with SOPAS ET, the engineering tool from SICK, logic editor is available for easy configuration of logic functions</li> <li>• <b>Connection CONFIG:</b> 1 x M8, 4-pin female connector, USB 2.0 (USB-A)</li> <li>• <b>Logic editor:</b> yes</li> <li>• <b>Communication interface:</b> IO-Link, USB, Ethernet, PROFINET, REST API</li> <li>• <b>Product category:</b> IO-Link Master</li> </ul> | SIG200-0A0412200                     | 1089794  |
|  | <ul style="list-style-type: none"> <li>• <b>Further functions:</b> Web server integrated, USB connection for easy configuration of the SIG200 Sensor Integration Gateway with SOPAS ET, the engineering tool from SICK, logic editor is available for easy configuration of logic functions</li> <li>• <b>Connection CONFIG:</b> 1 x M8, 4-pin female connector, USB 2.0 (USB-A)</li> <li>• <b>Logic editor:</b> yes</li> <li>• <b>Communication interface:</b> IO-Link, USB, Ethernet, REST API</li> <li>• <b>Product category:</b> IO-Link Master</li> </ul>           | SIG200-0A0G12200                     | 1102605  |

Recommended services

Additional services → [www.sick.com/CSM](http://www.sick.com/CSM)

|  | Type                   | Part no.   |
|--|------------------------|------------|
| Function Block Factory   |                        |            |
| <ul style="list-style-type: none"> <li><b>Description:</b> The Function Block Factory supports common programmable logic controllers (PLCs) from various manufacturers, such as Siemens, Beckhoff, Rockwell Automation and B&amp;R. More information on the FBF can be found <a _blank"="" href="https://fbf.cloud.sick.com target=">here</a>.</li> <li><b>Note:</b> You can configure your function block at <a _blank"="" href="https://fbf.cloud.sick.com target=">Function Block Factory</a>. As a login please use your SICK ID.</li> </ul> | Function Block Factory | On request |



## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)