

MIKROELEKTRONIKA D.O.O, Batajnički drum 23, 11000 Belgrade, Serbia VAT: SR105917343 Registration No. 20490918
Phone: + 381 11 78 57 600 Fax: + 381 11 63 09 644 E-mail: office@mikroe.com

Cooler Click

www.mikroe.com





PID: MIKROE-6068

Cooler Click is a compact add-on board designed as a cooling solution to manage heat in electronic systems efficiently. This board features the DRV8213, a brushless DC motor driver from Texas Instruments, ensuring a high-performance operation. This board also directly integrates a TMP007 temperature sensor and an MF25060V2-1000U-A99 cooling fan onto its platform, offering a compact and ready-to-use cooling system. It operates across a wide PWM frequency range from 0 to 100kHz, supports both 3.3V and 5V logic levels, and features several protection mechanisms, including undervoltage lockout, overcurrent protection, and overtemperature shutdown. Ideal for various applications, the Cooler Click excels in server rack cooling, embedded systems, development boards, gaming consoles, automotive electronics, and medical equipment, making it a versatile choice for continuous cooling requirements in environments prone to overheating.

Cooler Click is fully compatible with the mikroBUS $^{\text{\tiny M}}$ socket and can be used on any host system supporting the $\underline{\mathsf{mikroBUS}^{\text{\tiny M}}}$ standard. It comes with the $\underline{\mathsf{mikroSDK}}$ open-source libraries, offering unparalleled flexibility for evaluation and customization. What sets this $\underline{\mathsf{Click}}$ board $^{\text{\tiny M}}$ apart is the groundbreaking $\underline{\mathsf{ClickID}}$ feature, enabling your host system to seamlessly and automatically detect and identify this add-on board.

How does it work?

Cooler Click is based on the DRV8213, an advanced brushless DC motor driver from Texas Instruments, as its core component. This innovative board integrates a miniature temperature sensor, TMP007, and a cooling fan, MF25060V2-1000U-A99, right on its surface, making it a ready-to-go cooling solution. It's perfectly suited for use in environments prone to overheating, such as server rack cooling, embedded systems and IoT devices, development board

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.








MIKROELEKTRONIKA D.O.O, Batajnički drum 23, 11000 Belgrade, Serbia VAT: SR105917343 Registration No. 20490918

Phone: + 381 11 78 57 600 Fax: + 381 11 63 09 644 E-mail: office@mikroe.com

prototyping, gaming consoles and PC cooling, automotive electronics, medical equipment cooling, or similar applications, where continuous cooling is essential.

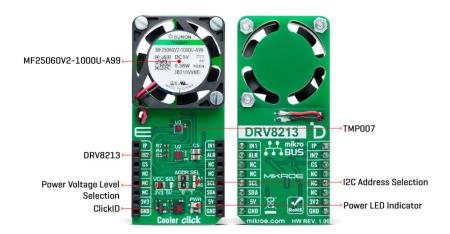

The DRV8213 is a comprehensive motor driver featuring an integrated full-bridge driver with current sensing and regulation capabilities and a unique current sense output. It's designed for efficiency, using a 2-pin PWM interface for motor speed control through the IN1 and IN2 pins on the mikroBUS™ socket, covering a wide PWM frequency range from 0 to 100kHz. Notably, its auto-sleep mode reduces the need for additional GPIO connections for sleep or turn-off functions by automatically entering a low-power mode when not in use. The DRV8213 is also enriched with several protection features, such as undervoltage lockout, overcurrent protection, and overtemperature shutdown, ensuring reliable operation under various conditions.

The TMP007 sensor, another onboard component from Texas Instruments, employs infrared thermopile technology to measure temperatures without direct contact with the object. This capability accurately monitors the surrounding temperature where the Click board $^{\mathsf{TM}}$ is placed. The sensor's output is digitized and processed along with the die temperature to compute the object temperature. It uses an I2C interface for communication with the host MCU and an alert function via the ALR pin of the mikroBUS $^{\mathsf{TM}}$ socket for temperature exceedance notifications.

Complementing these components is the MF25060V2-1000U-A99 fan, a high-performance cooling fan operating on a 5VDC supply capable of reaching speeds up to 10,000 RPM. This fan is essential for dissipating heat efficiently, ensuring the system remains cool under operation.

This Click board $^{\text{TM}}$ can operate with either 3.3V or 5V logic voltage levels selected via the VCC SEL jumper. This way, both 3.3V and 5V capable MCUs can use the communication lines properly. Also, this Click board $^{\text{TM}}$ comes equipped with a library containing easy-to-use functions and an example code that can be used as a reference for further development.

Specifications

Туре	Brushless
	Ideal for server rack cooling, embedded systems, development boards, gaming consoles, automotive electronics, and medical equipment, making it a versatile choice for continuous cooling requirements in

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.









MIKROELEKTRONIKA D.O.O, Batajnički drum 23, 11000 Belgrade, Serbia VAT: SR105917343 Registration No. 20490918
Phone: + 381 11 78 57 600 Fax: + 381 11 63 09 644 E-mail: office@mikroe.com

	environments prone to overheating		
On-board modules	DRV8213 - brushless DC motor driver from Texas Instruments		
Key Features	Complete cooling solution, integrated temperature sensor, cooling fan with rotation speed up to 10k RPM, PWM driver control with adjustable frequency, auto Sleep mode, protection features, alert interrupt, and more		
Interface	I2C,PWM		
ClickID	Yes		
Compatibility	mikroBUS™		
Click board size	L (57.15 x 25.4 mm)		
Input Voltage	3.3V or 5V		

Pinout diagram

This table shows how the pinout on Cooler Click corresponds to the pinout on the mikroBUS $^{\text{m}}$ socket (the latter shown in the two middle columns).

Notes	Pin	mikro™ BUS				Pin	Notes	
Current Monitor	IP	1	AN	PWM	16	IN1	Fan Driver Control 1	
Fan Driver Control 2	IN2	2	RST	INT	15	ALR	Alert Interrupt	
ID COMM	CS	3	CS	RX	14	NC		
	NC	4	SCK	TX	13	NC		
	NC	5	MISO	SCL	12	SCL	I2C Clock	
	NC	6	MOSI	SDA	11	SDA	I2C Data	
Power Supply	3.3V	7	3.3V	5V	10	5V	Power Supply	
Ground	GND	8	GND	GND	9	GND	Ground	

Onboard settings and indicators

Label	Name	Default	Description	
LD1	PWR	-	Power LED Indicator	
JP1	VCC SEL	Left	Power Voltage Level Selection 3V3/5V: Left position 3V3, Right position 5V	
JP2-JP3	ADDR SEL	Left	I2C Address Selection 0/1: Left position 0, Right position 1	

Cooler Click electrical specifications

Description	Min	Тур	Max	Unit
Supply Voltage	3.3	-	5	V
Maximum Rotation Speed		1	10.000	PRM

Software Support

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.





health and safety management system.



MIKROELEKTRONIKA D.O.O, Batajnički drum 23, 11000 Belgrade, Serbia VAT: SR105917343 Registration No. 20490918
Phone: + 381 11 78 57 600 Fax: + 381 11 63 09 644 E-mail: office@mikroe.com

www.mikroe.com

We provide a library for the Cooler Click as well as a demo application (example), developed using MIKROE <u>compilers</u>. The demo can run on all the main MIKROE <u>development boards</u>.

Package can be downloaded/installed directly from NECTO Studio Package
Manager(recommended), downloaded from our <u>LibStock™</u> or found on <u>Mikroe github account</u>.

Library Description

This library contains API for Cooler Click driver.

Key functions

- cooler_get_object_temperature This function reads the object's temperature data in degrees Celsius.
- cooler_set_out_state This function controls the operation of the cooler on/off.

Example Description

This example demonstrates the use of the Cooler click board by reading the target object temperature and controlling the cooler.

The full application code, and ready to use projects can be installed directly from NECTO Studio Package Manager(recommended), downloaded from our <u>LibStock™</u> or found on <u>Mikroe github</u> account.

Other Mikroe Libraries used in the example:

- MikroSDK.Board
- MikroSDK.Log
- · Click.Cooler

Additional notes and informations

Depending on the development board you are using, you may need <u>USB UART click</u>, <u>USB UART 2 Click</u> or <u>RS232 Click</u> to connect to your PC, for development systems with no UART to USB interface available on the board. UART terminal is available in all MIKROE <u>compilers</u>.

mikroSDK


This Click board[™] is supported with mikroSDK - MIKROE Software Development Kit. To ensure proper operation of mikroSDK compliant Click board[™] demo applications, mikroSDK should be downloaded from the LibStock and installed for the compiler you are using.

For more information about mikroSDK, visit the official page.

Resources

mikroBUS™

mikroSDK







health and safety management system.



MIKROELEKTRONIKA D.O.O, Batajnički drum 23, 11000 Belgrade, Serbia VAT: SR105917343 Registration No. 20490918

Phone: + 381 1178 57 600 Fax: + 381 11 63 09 644 E-mail: office@mikroe.com www.mikroe.com

Click board™ Catalog

Click Boards™

ClickID

Downloads

TMP007 datasheet

Cooler click example on Libstock

Cooler click 2D and 3D files v100

MF25060V2-1000U-A99 datasheet

DRV8213 datasheet

Cooler click schematic v100

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.





