



Echo 26A

18 x 18mm GPS Ceramic Patch Antenna



Key Features

- Low voltage low current consumption
- LNA gain of 27dB
- Centre frequency of 1575.42MHz

General Description

The Echo 26A is GPS antenna with a built in Low Noise Amplifier (LNA) for embedded applications.

This antenna produces an impressive peak gain of 27dB from the LNA, developing a strong signal that influences the speed of acquiring satellites.

Common applications include: vehicle/fleet/asset tracking, mobile applications and general position services.

Cable length and connector variations possible for small volume orders.

Additional Considerations

- Strong signal reduces satellite fix time
- Ceramic filter to reduce noise
- Meets all EU Criteria for electronic goods





Echo 26A

18 x 18mm GPS Ceramic Patch Antenna


Electrical Specifications

Impedance:	50 ohm
LNA Gain:	27 dB typical
VSWR:	<2.0 :1 Max
Supply voltage:	2.3~5.5 V DC
Current consumption:	2.5V - 6.6 mA 3V - 8.6 mA 4V - 12.6 mA 5V - 16 mA
Centre frequency:	1575.42 MHz \pm 1.023 MHz
Bandwidth:	10 MHz
Polarization:	RHCP
Noise figure:	1.5 dB typ
Ex-band attenuation SAW:	30 dB min @fo \pm 50 MHz 35 dB min @fo \pm 100 MHz


Mechanical Specifications

Dimensions:	19.7 x 19.6 x 6.6 mm
Cable:	1.13 mm
Connector:	IPEX
Mounting:	Internal

Overall Dimensions with PCB

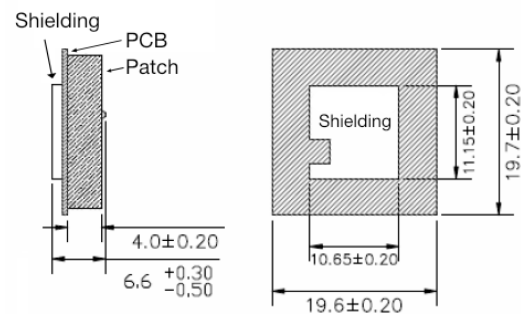


Patch Only Dimensions

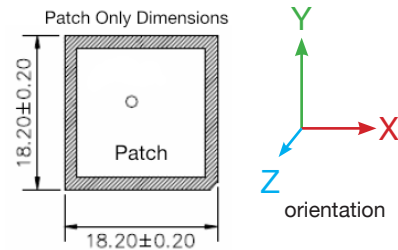

Environmental Specifications

Operating temperature:	-40 to +90 °C
Relative humidity:	10 to 95 %

Return Loss tested with 100 mm cable

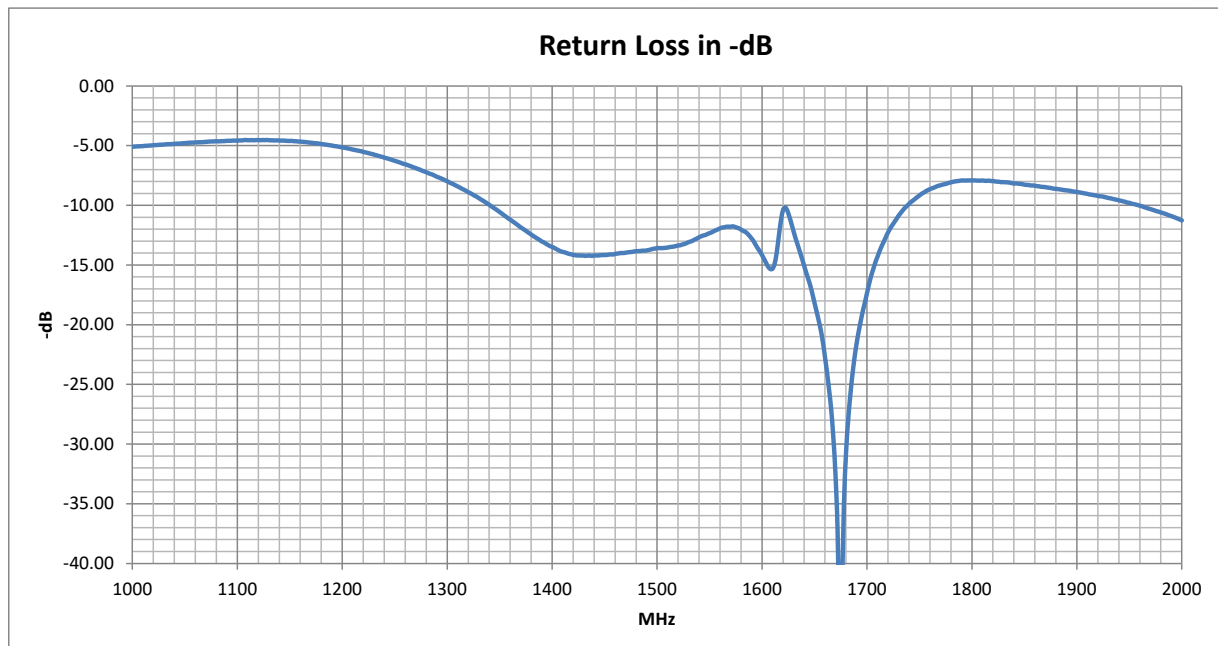





Echo 26A

18 x 18mm GPS Ceramic Patch Antenna

VSWR tested with 100 mm cable

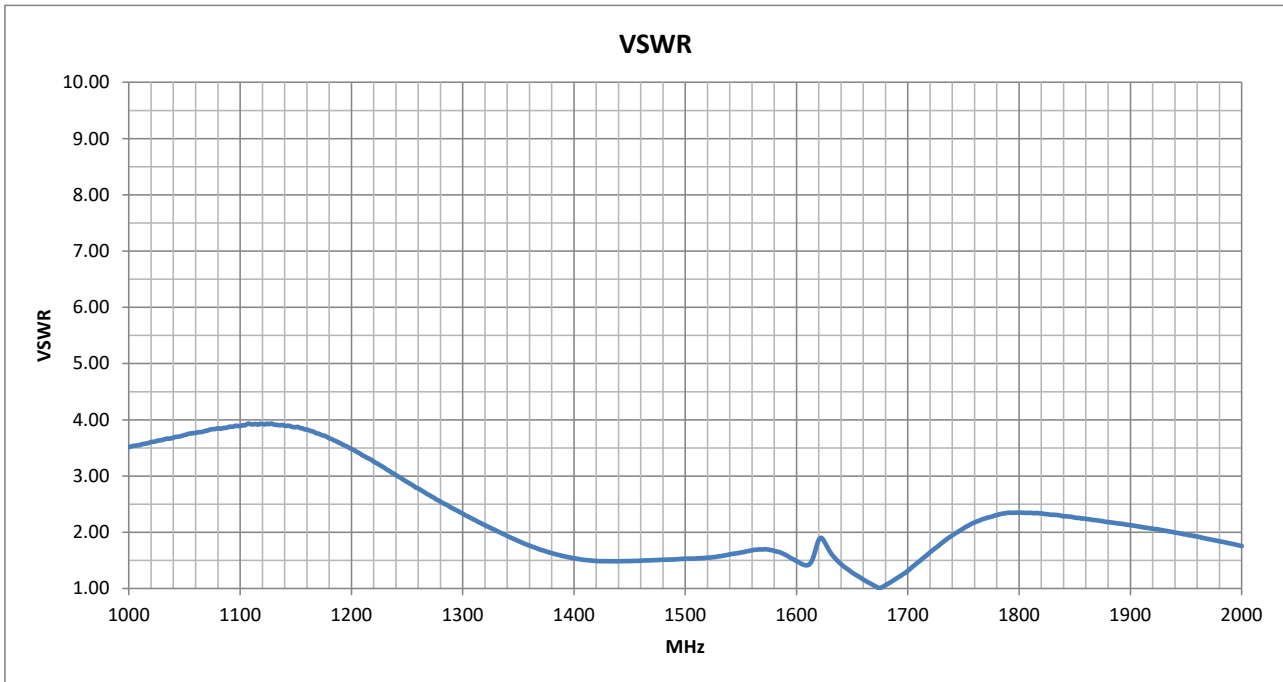

Average Gain tested with 100 mm cable

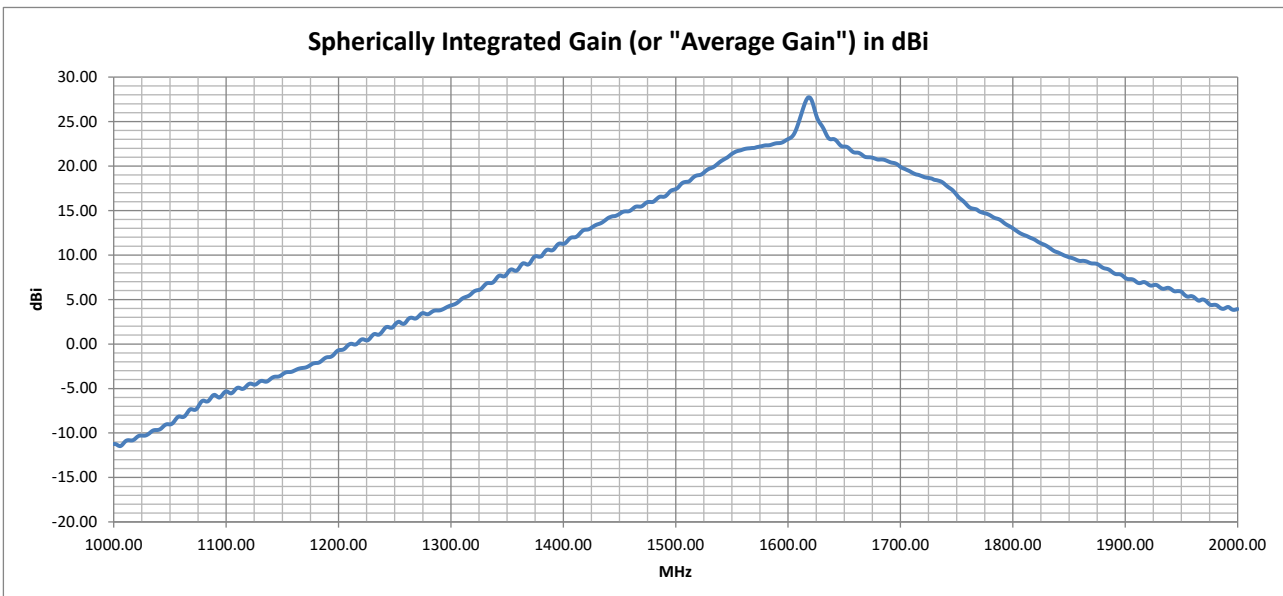




Echo 26A

18 x 18mm GPS Ceramic Patch Antenna

Radiation Plots tested with 100 mm cable

1570 MHz XY

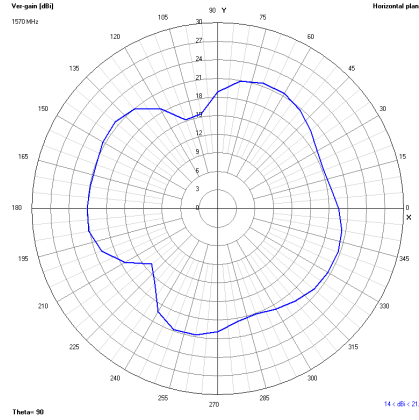


XZ




YZ




1580 MHz XY

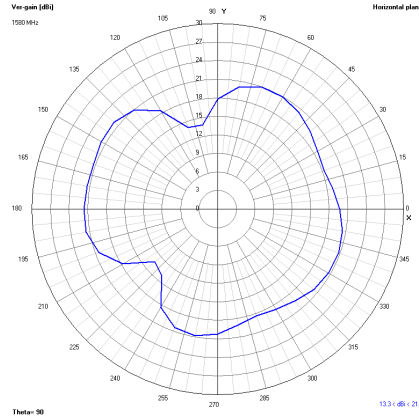

XZ

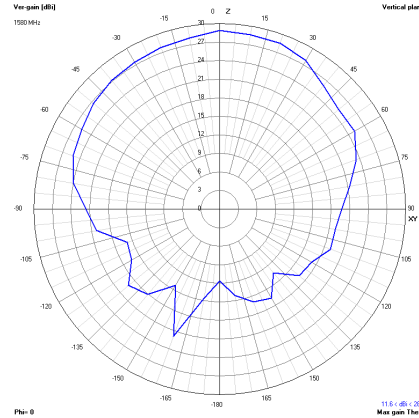

YZ

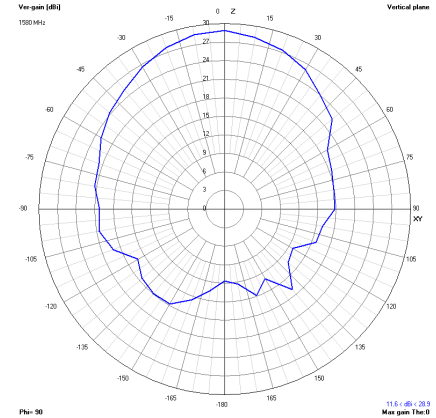




Echo 26A


18 x 18mm GPS Ceramic Patch Antenna

3D Radiation Plots tested with 100 mm cable

1570 MHz

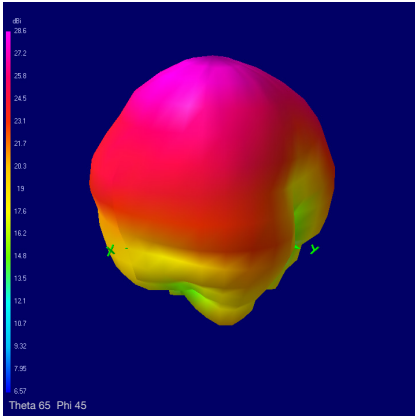

1580 MHz

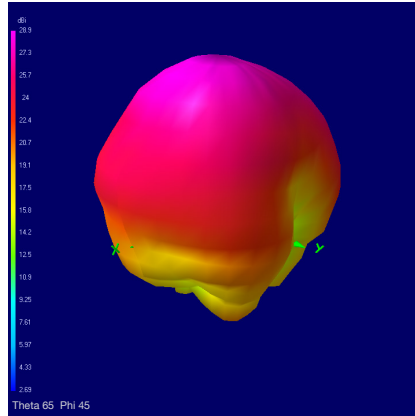

Ordering Details:

Part number	Description
ECHO26A/0.1M/IPEX/S/S/15	GPS Ceramic Patch Antenna, 100mm Cable, IPEX Connector