


RoHS
Compliant



Features

- Glass passivated chip
- Low forward voltage drop
- Ideal for printed circuit board
- High surge current capability
- Meet UL flammability classification 94V-0

Applications

General purpose use in AC/DC bridge full wave rectification, for SMPS, lighting ballast, adapter, etc.

Specifications

Reverse Voltage : 50 to 1,000 Volts

Forward Current : 15 Amperes

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristics	Symbol	GBJ 15005	GBJ 1501	GBJ 1502	GBJ 1504	GBJ 1506	GBJ 1508	GBJ 1510	Unit
Max. Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1,000	V
Max. RMS Voltage	VRMS	35	70	140	280	420	560	700	
Max. DC Blocking Voltage	V DC	50	100	200	400	600	800	1,000	
Max. Average Forward (with heatsink Note 2) Rectified Current at Tc = 100°C (without heatsink)	I(AV)	15 3.2							A
Peak Forward Surge Current 8.3mS Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	IFSM	240							
I ² t Rating For Fusing (t < 8.3 mS)	I ² t	240							
Peak Forward Voltage per Diode at 7.5A DC	VF	1							V
Max. DC Reverse Current at Rated @TJ=25°C DC Blocking Voltage per Diode @TJ=125°C		5 500							µA
Typical Junction Capacitance per Diode (Note 1)	CJ	60							pF
Typical Thermal Resistance to Ambient (Note 2)	RθJA	4.5							°C / W
Typical Thermal Resistance to case (Note 2)	RθJC	0.8							
Typical Thermal Resistance to lead (Note 2)	RθJL	1.5							
Operating Junction Temperature Range	TJ	-55 to +150							°C
Storage Temperature Range	TSTG								

Note: 1. Measured at 1MHz and applied reverse voltage of 4V DC
2. Device mounted on 300 × 300 × 1.6mm cu plate heatsink

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

Rating and Characteristic Curves

Fig. 1 - Forward Current Derating Curve

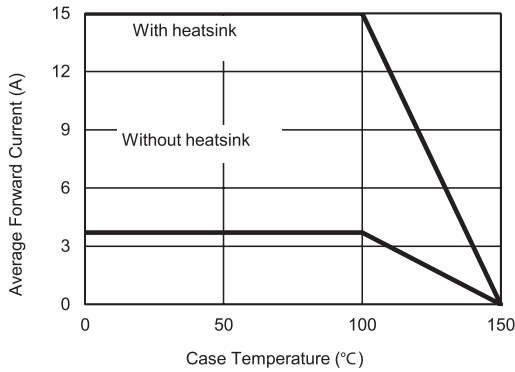


Fig. 2 - Maximum Non-Repetitive Surge Current

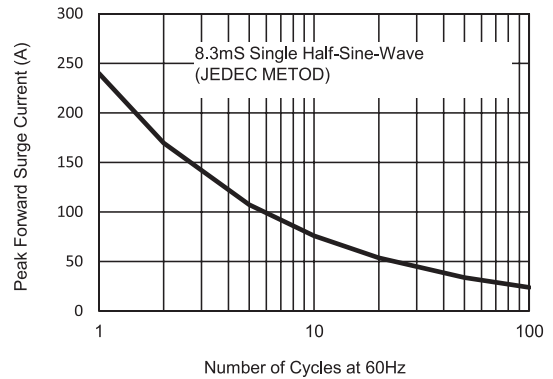


Fig. 3 - Typical Reverse Characteristics

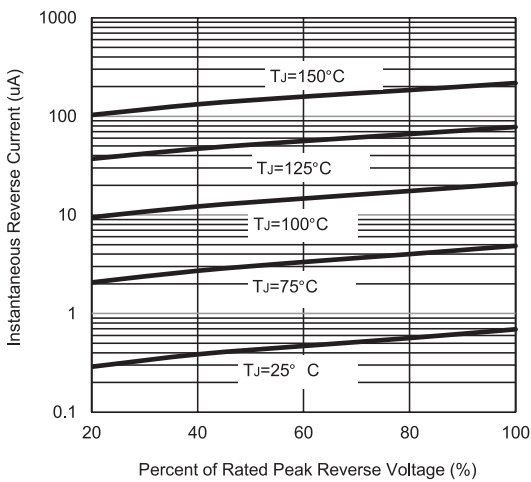


Fig. 4 - Typical Forward Characteristics



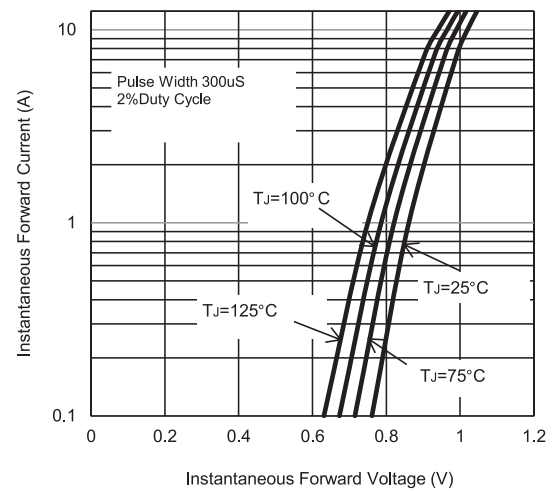


Fig. 5 - Typical Junction Capacitance

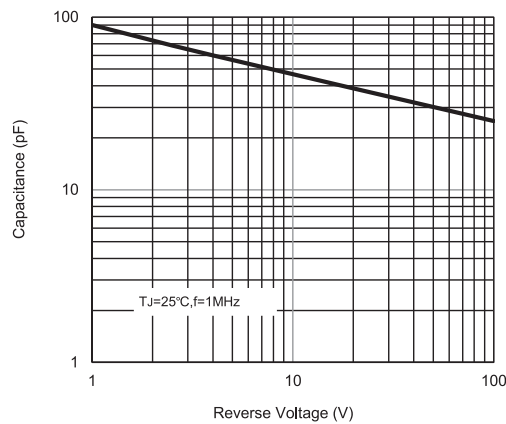

Diagram

GBJ

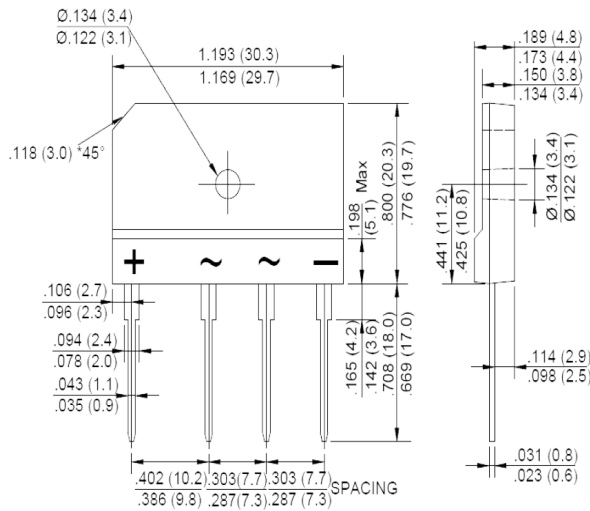

Part Number Table

Description	Part Number
Bridge Rectifier, Single Phase, 50V, 15A, SIP, 4 Pins, 1.1V	GBJ15005
Bridge Rectifier, Single Phase, 100V, 15A, SIP, 4 Pins, 1.1V	GBJ1501
Bridge Rectifier, Single Phase, 200V, 15A, SIP, 4 Pins, 1.1V	GBJ1502
Bridge Rectifier, Single Phase, 400V, 15A, SIP, 4 Pins, 1.1V	GBJ1504
Bridge Rectifier, Single Phase, 600V, 15A, SIP, 4 Pins, 1.1V	GBJ1506
Bridge Rectifier, Single Phase, 800V, 15A, SIP, 4 Pins, 1.1V	GBJ1508
Bridge Rectifier, Single Phase, 1kV, 15A, SIP, 4 Pins, 1.1V	GBJ1510

Dimensions : Inches (Millimetres)

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 sg.element14.com/b/multicomp-pro