


Bench-type True RMS Digital Multimeter

multicomp PRO

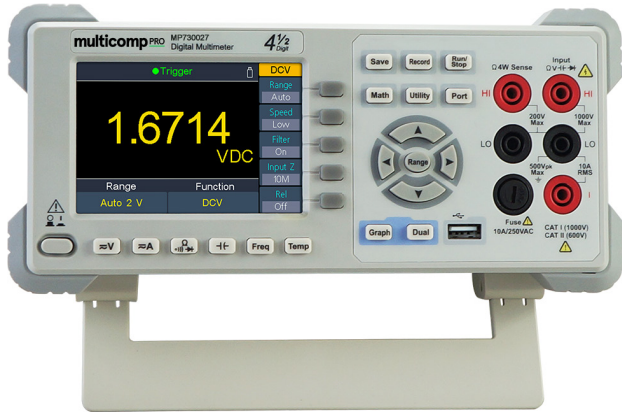

Features

- 4" 480 × 320 pixels high resolution LCD Display
- Resolutions up to 4-1/2 digits
- Reading rates up to 150 readings/s
- True RMS AC voltage / current measurement
- Dual line display supported
- Data-logger Function
- The change trend analysis accessible via special chart mode
- SCPI supported - remote control, and data-sharing possible via LAN, USB, RS232 port, and WiFi (WiFi module is optional)
- Multi- IO interface: USB Device / Host, RS232, LAN, and ext. trigger input

Performance Specifications

Parameters	Measurement Range	Frequency Range	Accuracy: 1 Year ± (% of reading + % of range)
DC Voltage	600mV, 6V, 60V, 600V, 1000V	-	0.02 ±0.01
True RMS AC Voltage	600mV, 6V, 60V, 600V, 750V	20Hz - 50Hz	2 + 0.1
		50Hz - 20kHz	0.2 + 0.06
		20kHz - 50kHz	1 + 0.05
		50kHz - 100kHz	3 + 0.08
DC Current	600.00µA 6.0000mA 60.000mA 600.00mA 6.000A 10.0000A	-	0.06 + 0.02
			0.06 + 0.02
			0.1 + 0.05
			0.2 + 0.02
			0.2 + 0.05
			0.250 + 0.05
True RMS AC Current	60.000mA, 600.00mA, 6.0000A, 10.000A	20Hz - 45Hz	2 + 0.10
		45Hz - 2kHz	0.50 + 0.10
		2kHz - 10kHz	2.50 + 0.20
Resistance	600.00Ω 6.0000kΩ 60.000kΩ 600.00kΩ 6.0000MΩ 60.000MΩ 100.00MΩ	-	0.040 + 0.01
			0.030 + 0.01
			0.030 + 0.01
			0.040 + 0.01
			0.120 + 0.03
			0.90 + 0.03
			1.75 + 0.03
Diode Test	3.0000V	-	0.5 + 0.01
Continuity	1000Ω	-	0.5 + 0.01

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicomp PRO

Bench-type True RMS Digital Multimeter

multicomp PRO

Parameters	Measurement Range	Frequency Range	Accuracy: 1 Year \pm (% of reading +% of range)
Frequency Period	600mV - 750V	20Hz - 2kHz	0.01 + 0.003
		2kHz - 20kHz	0.01 + 0.003
		20kHz - 200kHz	0.01 + 0.003
		200kHz - 1MHz	0.01 + 0.006
	60mA - 10A	20Hz - 2kHz	0.01 + 0.003
		2kHz - 10kHz	0.01 + 0.003
Test Current			
Capacitance	2.000nF	200nA	3 + 1.0
	20.00nF	200nA	1 + 0.5
	200.0nF	2 μ A	1 + 0.5
	2.000 μ F	10 μ A	1 + 0.5
	200 μ F	100 μ A	1 + 0.5
	10000 μ F	1mA	2 + 0.5
Temperature	Temperature sensors under 2 categories supported - Thermocouple (ITS-90 conversion between B / E / J / K / N / R / S / T type), and thermal resistance (RTD sensor conversion between Pt100 and Pt385 type)		
Other functions	Bar meter, histogram, trend chart, Max. Min. value, average value, standard deviation, DB / DBm, Pass / Fail		
Data-logger Function			
Logging Duration	5ms - 1000s		
Logging Length	1M points		
General			
Dimension (W \times H \times D)	235mm \times 110mm \times 295mm		
Weight (without package)	3kg		
Standard Accessories Included	Multimeter Lead, USB cable, User Manual, Fuse, Alligator Clip, Power cord		
Power Supply	100V AC to 240V AC		
Power Cord Plug Type	UK / EU		
Warranty	03 years		

Part Number Table

Description	Part Number
Bench-type True RMS Digital Multimeter	MP730027 EU-UK

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicomp PRO