
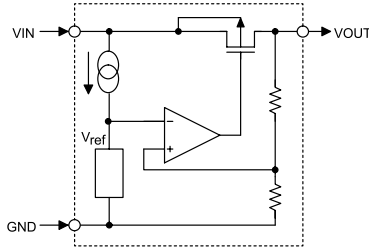


High Driver LDO Regulator multicomp^{PRO}

RoHS
Compliant



Features

- Low power consumption
- Low voltage drop
- Low temperature coefficient
- High input voltage (up to 24V)

Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating
Supply Voltage	V_{SS}	-0.3 to 26V
Power Consumption	P_c	250mW
Junction Temperature	T_J	125°C
Operating Temperature	T_{opr}	0°C to 70°C
Storage Temperature range	T_{STG}	-50°C to 125°C

Electrical Characteristic $T_a = 25^\circ\text{C}$

HT7530S, +3.0V output type

Parameter	Symbol	Test conditons		Min	Typ	Max	Unit
		V_{IN}	Conditions				
Output Voltage Tolerance	V_{OUT}	5V	$I_{OUT}=10\text{mA}$	2.85	3	3.15	V
Output Current	I_{OUT}			60	100		mA
Load Regulation	ΔV_{OUT}		$1\text{mA} \leq I_{OUT} \leq 50\text{mA}$		60	150	mV
Voltage Drop	V_{DIF}		$I_{OUT}=1\text{mA}$		100		
Current Consumption	I_{SS}	5V	No load		10	20	μA
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$		$4\text{V} \leq V_{IN} \leq 12\text{V}$ $I_{OUT}=1\text{mA}$		0.2		%/V
Input Voltage	V_{IN}					24	V
Temperature Coefficient	$\frac{\Delta V_{OUT}}{\Delta T_a}$	5V	$I_{OUT}=10\text{mA}$ $0^\circ\text{C} < T_a < 70^\circ\text{C}$		± 0.45		$\text{mV}/^\circ\text{C}$

High Driver LDO Regulator multicomp^{PRO}

HT7533S, +3.3V output type


Parameter	Symbol	Test conditons		Min	Typ	Max	Unit
		V _{IN}	Conditions				
Output Voltage Tolerance	V _{OUT}	5.5V	I _{OUT} =10mA	3.14	3.3	3.47	V
Output Current	I _{OUT}			60	100		mA
Load Regulation	ΔV _{OUT}		1mA ≤ I _{OUT} ≤ 50mA		60	150	mV
Voltage Drop	V _{DIF}		I _{OUT} =1mA		100		
Current Consumption	I _{SS}	5.5V	No load		10	20	uA
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$		4.5V ≤ V _{IN} ≤ 12V I _{OUT} =1mA		0.2		%/V
Input Voltage	V _{IN}					24	V
Temperature Coefficient	$\frac{\Delta V_{OUT}}{\Delta T_a}$	5.5V	I _{OUT} =10mA 0°C < T _a < 70°C		±0.5		mV/°C

HT7550S, +5.0V output type

Parameter	Symbol	Test conditons		Min	Typ	Max	Unit
		V _{IN}	Conditions				
Output Voltage Tolerance	V _{OUT}	7V	I _{OUT} =10mA	4.75	5	5.25	V
Output Current	I _{OUT}			100	150		mA
Load Regulation	ΔV _{OUT}		1mA ≤ I _{OUT} ≤ 70mA		60	150	mV
Voltage Drop	V _{DIF}		I _{OUT} =1mA		100		
Current Consumption	I _{SS}	7V	No load		10	20	uA
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$		6V ≤ V _{IN} ≤ 15V I _{OUT} =1mA		0.2		%/V
Input Voltage	V _{IN}					24	V
Temperature Coefficient	$\frac{\Delta V_{OUT}}{\Delta T_a}$	7V	I _{OUT} =10mA 0°C < T _a < 70°C		±0.75		mV/°C


Typical Characteristics

Basic circuits

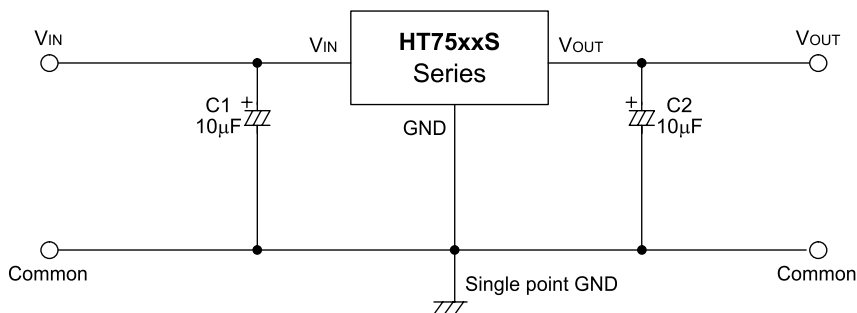

High Driver LDO Regulator **multicomp**PRO

Diagram

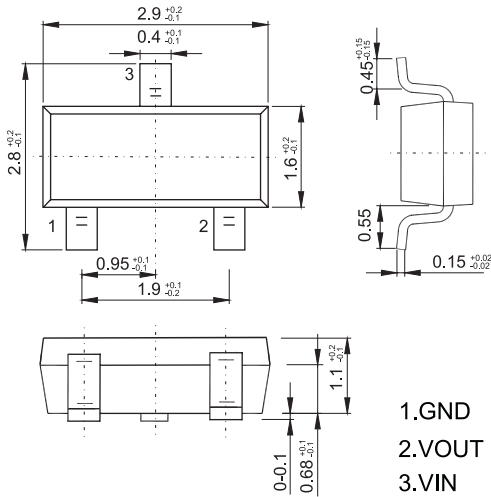

Part Number Table

Description	Part Number
High Driver LDO Regulator, 3.0V, ±5%, SOT-23-3	HT7530S
High Driver LDO Regulator, 3.3V, ±5%, SOT-23-3	HT7533S
High Driver LDO Regulator, 5.0V, ±5%, SOT-23-3	HT7550S

Dimensions : Millimetres

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicompPRO