


Panel Mount Indicator, Non-Relampable Neon Technology Mounting Hole, Ø 0.380"



All dimensions are in inches

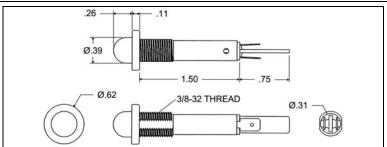

Recommended panel thickness: 0.030" to 0.250'

.187 x .020 terminals are standard

T_{STG} : -25°C - +80°C Storage temperature Ambient temperature T_A : -20°C - +60°C Voltage tolerance V_{OP} : ±10%

Part No.	Lens Color	Voltage	Current mA	Rated Life
Neon 115VAC Series				
WL-6010QM1	Red	105-125VAC	1.5mA	25,000 Hrs
WL-6010QM3	Amber	105-125VAC	1.5mA	25,000 Hrs
WL-6012QM5	Green	105-125VAC	1.5mA	25,000 Hrs
Neon 230VAC Series				
WL-6011QM1	Red	208-250VAC	1.5mA	25,000 Hrs
WL-6011QM3	Amber	208-250VAC	1.5mA	25,000 Hrs
WL-6013QM5	Green	208-250VAC	1.5mA	25,000 Hrs

Body Material: Nylon, white Lens Material: Polycarbonate Bezel Material: Stainless steel

Quick-connect, tinned brass

Terminals: Gaskets: Buna-N

required. Options: Additional options and lens styles available. Please contact Wamco for more information.

Most Wamco indicators carry Agency approvals.

regarding the specific product series and voltage

Please contact Wamco for the latest Agency information

Drawn SC 03/01/10 **Panel Mount Indicators** Datasheet: Rev: Checked EΒ 03/01/10 WL-601XQMX Series Neon 1 **Approved** EΒ 03/02/10

Certifications: