


Panel Mount Indicator, Non-Relampable LED Technology Mounting Hole, Ø 0.380"



All dimensions are in inches

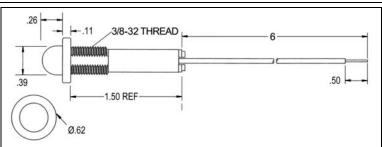

Recommended panel thickness: 0.030" to 0.250'

6" leads with 1/2" strip are standard

T_{STG} : -25°C - +80°C T_A : -20°C - +60°C Storage temperature Ambient temperature

Voltage tolerance V_{OP} : ±10%

Part No.	Lens Color	Voltage	Current mA	Rated Life
LED 12V Series				
WL-6091M1-12V	Red	12V-14V	20mA	100,000 Hrs
WL-6091M5-12V	Green	12V-14V	20mA	100,000 Hrs
WL-6091M7-12V	Yellow	12V-14V	20mA	100,000 Hrs
LED 24V Series				
WL-6091M1-24V	Red	24V-28V	20mA	100,000 Hrs
WL-6091M5-24V	Green	24V-28V	20mA	100,000 Hrs
WL-6091M7-24V	Yellow	24V-28V	20mA	100,000 Hrs

Body Material: Nylon, white Lens Material: Polycarbonate Bezel Material: Stainless steel Wire Gauge: 22 AWG

Certifications: Most Wamco indicators carry Agency approvals.

Please contact Wamco for the latest Agency information

regarding the specific product series and voltage

required.

Gaskets: Buna-N Options: Additional options and lens styles available.

Please contact Wamco for more information.

Drawn	SC	03/01/10	Panel Mount Indicators	Datasheet:	Rev:
Checked	EB	03/01/10	LED	WL-6091MX-XXX Series	Nev.
Approved	EB	03/02/10	LED	VVL-009 HVIX-XXX Series	