




(2,00mm) .0787"

T2M, S2M SERIES

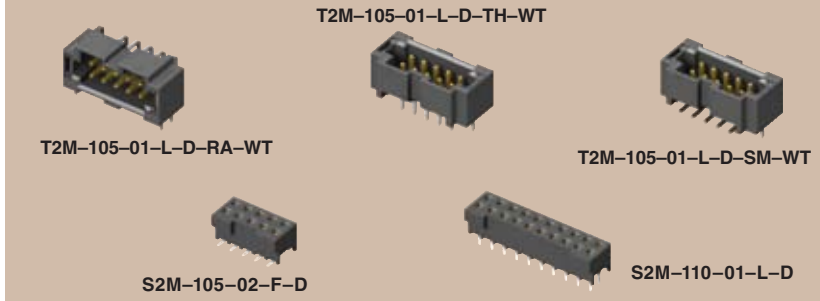

HIGH RELIABILITY HEADER & SOCKET

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?T2M

Insulator Material:

Black Liquid Crystal Polymer



Terminal Material:

Phosphor Bronze

Plating:

Sn or Au over 50µ" (1,27µm) Ni

Current Rating:

3A @ 80°C ambient

Operating Temp Range:

-55°C to +105°C with Tin;

-55°C to +125°C with Gold

RoHS Compliant:

Yes

Processing:

Lead-Free Solderable:

Yes

SMT Lead Coplanarity:

(0,10mm) .004" max

Note: Other Gold plating options available.

Contact Samtec.

Note: Some lengths, styles and options are non-standard, non-returnable.

T2M - 1 NO. OF POSITIONS - 01 - PLATING OPTION - D - OPTION - OTHER OPTION

Mates with: S2SD, S2M

05, 07, 10, 15, 20, 25, 30 (Per Row)

-L = 10µ" (0,25µm) Gold on contact, Matte Tin on tail

-TH = Through-hole



-RA = Right Angle

-SM = Surface Mount

-WT = Weld Tab (S2SD & S2SDT -SR/-DR required mate)

-K = (7,50mm) .295" DIA Polyimide film Pick & Place Pad (-SM only)

-TR = Tape & Reel (-SM only)

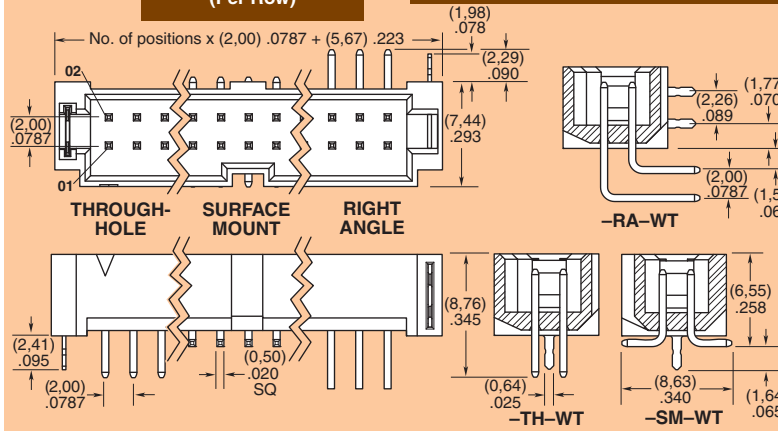

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?S2M

Insulator Material:

Black Liquid Crystal Polymer

Contact Material:

BeCu

Plating:

Sn or Au over 50µ" (1,27µm) Ni

Operating Temp Range:

-55°C to +125°C

Contact Resistance:

10 mΩ max

Insertion Depth:

(3,05mm) .120" to (3,25mm) .128"

Insertion Force:

(Single contact only) 2.0oz (0,56N) average

Withdrawal Force:

(Single contact only) 1.5oz (0,42N) average

Max Cycles:

100 with 10µ" (0,25µm) Au

RoHS Compliant:

Yes

Processing:

Lead-Free Solderable:

Yes

SMT Lead Coplanarity:

(0,10mm) .004" max



S2M - 1 NO. OF POSITIONS - LEAD STYLE - PLATING OPTION - D - OPTION - OTHER OPTION

Mates with: T2SD, T2M

05, 07, 10, 15, 20, 25, 30 (Per Row)

-01 = Through-hole

-02 = Surface Mount


-F = Gold flash on contact, Matte Tin on tail

-L = 10µ" (0,25µm) Gold on contact, Matte Tin on tail

-K = (5,50mm) .217" DIA Polyimide film Pick & Place Pad (-SM only)


-LC = Locking Clip (Manual placement required) (-SM only)

-TR = Tape & Reel Packaging

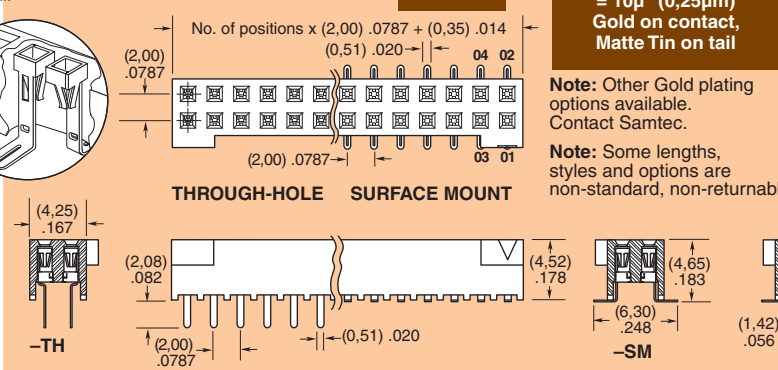

Note: Other Gold plating options available. Contact Samtec.

Note: Some lengths, styles and options are non-standard, non-returnable.



Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM