AC TO AC ADAPTOR

Ideal Power Ltd.	77DE-06-12M	INPUT VOLTAGE	230VAC
		OUTPUT VOLTAGE	12VAC

ELECTRICAL & MECHANICAL SPECIFICATION

18718

18718

Intertek

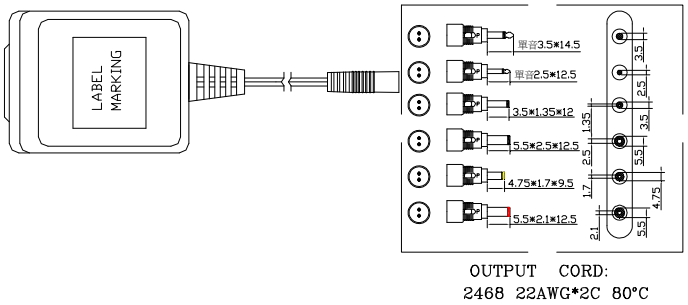

OUTPUT CORD:
2468 22AWG*2C 80°C

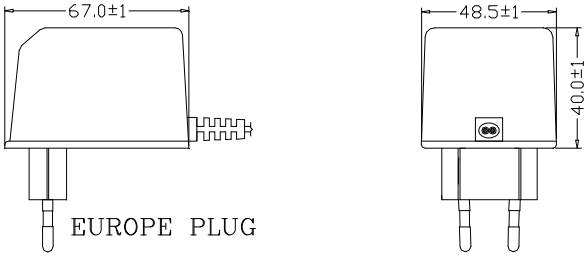

Output Cable: ***2468 22AWG*2C 1.8M LENGTH+JACK***

ELECTRONICAL SPECIFICATION

Input Voltage	***230***	Volts
Frequency (Hz)	***50***	Hz
Power Rated (W)	***10***	W
Exciting Current With No load	***60***	mA Max
Exciting Current With Full load	***80***	mA Max
Output Voltage	***12.0***	Volts±5%
Output Current	***0.5***	Amp
Output Voltage Without Load	***15.6***	Volts±5%
HI-POT :		
Test Time	***1***	Min
PRI TO SEC	***3750***	Volts
PRI TO CORE	***3750***	Volts
SEC TO CORE	***1250***	Volts
Efficiency	***70***	%
Insulation Class	***B (130)***	℃

MECHANICAL SPECIFICATION

Dimensions (L*W*H)	***67.0*48.5*40.0***	mm
Weight	***245***	g
Environment:		
Operating Temperature	***-10 To 40***	℃
Storage Temperature	***-20 To 70***	℃
Relative Temperature 40℃±2℃		
RELATIVE HUMIDITY	***90% RH***	

ELECTRICAL CIRCUIT

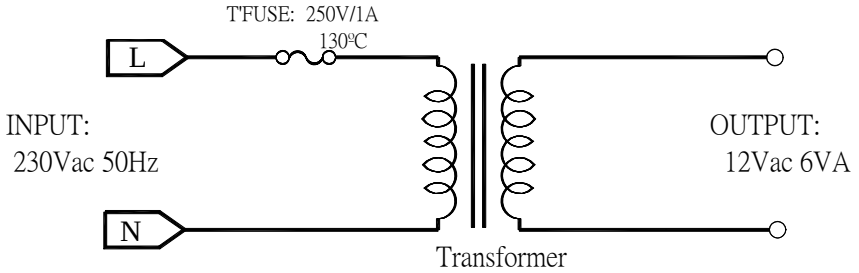

Head Office : Acorn House, Tree Beech Enterprise Park, Gunn, Barnstaple, Devon, England EX32 7NZ
TEL: +44 (0) 845 260 3400 FAX: +44 (0) 845 260 3400 E-Mail: info@idealpower.co.uk WEB: www.idealpower.co.uk