

# 30W 12V SMPS Demo Board with ICE3RBR0665JG

## AN-DEMO-3RBR0665JG

### About this document

#### Scope and purpose

This document is an engineering report that describes universal input 30 W 12 V off-line flyback converter power supply using Infineon CoolSET™ F3R family, ICE3RBR0665JG (DSO16/12). The converter is operated in Discontinuous Conduction Mode, 65 kHz fixed frequency, low standby power and various mode of protections for a high reliable system. This demo board is designed to evaluate the performance of ICE3RBR0665JG in ease of use.

#### Intended audience

This document is intended for power supply design/application engineer, students, etc.) who wish to design low cost and high reliable systems of off-line Switched Mode Power Supply (SMPS) for enclosed adapter, blu-ray/DVD player, set-top box, game console, smart meter, auxiliary power supply of white goods, PC, server, etc.

### Table of Contents

|          |   |           |
|----------|---|-----------|
|          | <b>About this document</b> .....                  | <b>1</b>  |
| <b>1</b> | <b>Abstract</b> .....                             | <b>3</b>  |
| <b>2</b> | <b>Demonstrator board</b> .....                   | <b>4</b>  |
| <b>3</b> | <b>Specifications of Demonstrator Board</b> ..... | <b>5</b>  |
| <b>4</b> | <b>Circuit description</b> .....                  | <b>6</b>  |
| 4.1      | Line input .....                                  | 6         |
| 4.2      | Start up .....                                    | 6         |
| 4.3      | Operation mode .....                              | 6         |
| 4.4      | Soft start.....                                   | 6         |
| 4.5      | RCD clamper circuit.....                          | 6         |
| 4.6      | Peak current control of primary current.....      | 6         |
| 4.7      | Output stage .....                                | 6         |
| 4.8      | Feedback and regulation.....                      | 6         |
| 4.9      | Active burst mode .....                           | 7         |
| 4.10     | Jittering and soft gate drive .....               | 7         |
| 4.11     | Protection function .....                         | 7         |
| <b>5</b> | <b>Circuit diagram</b> .....                      | <b>9</b>  |
| <b>6</b> | <b>PCB layout</b> .....                           | <b>11</b> |
| 6.1      | Top side .....                                    | 11        |
| 6.2      | Bottom side.....                                  | 11        |
| <b>7</b> | <b>Bill of material</b> .....                     | <b>12</b> |
| <b>8</b> | <b>Transformer construction</b> .....             | <b>13</b> |
| <b>9</b> | <b>Test results</b> .....                         | <b>14</b> |
| 9.1      | Efficiency, regulation and output ripple.....     | 14        |
| 9.2      | Standby power.....                                | 16        |
| 9.3      | Line regulation.....                              | 16        |

**Abstract**

|           |   |           |
|-----------|---|-----------|
| 9.4       | Load regulation .....   | 17        |
| 9.5       | Maximum input power.....  | 17        |
| 9.6       | ESD immunity (EN61000-4-2).....                                   | 17        |
| 9.7       | Surge immunity (EN61000-4-5).....                                 | 17        |
| 9.8       | Conducted emissions (EN55022 class B) .....                       | 18        |
| 9.9       | Thermal measurement .....   | 20        |
| <b>10</b> | <b>Waveforms and scope plots .....</b>                            | <b>21</b> |
| 10.1      | Startup at low/high AC line input voltage with maximum load ..... | 21        |
| 10.2      | Soft start.....   | 21        |
| 10.3      | Frequency jittering.....  | 22        |
| 10.4      | Drain and current sense voltage at maximum load.....              | 22        |
| 10.5      | Load transient response (Dynamic load from 10% to 100%) .....     | 23        |
| 10.6      | Output ripple voltage at maximum load .....                       | 23        |
| 10.7      | Output ripple voltage at burst mode 1 W load .....                | 24        |
| 10.8      | Active burst mode .....   | 24        |
| 10.9      | VCC over voltage protection.....                                  | 25        |
| 10.10     | Over load protection .....  | 25        |
| 10.11     | VCC under voltage/Short optocoupler protection .....              | 26        |
| 10.12     | External auto restart enable.....                                 | 26        |
| <b>11</b> | <b>References .....</b>   | <b>27</b> |
|           | <b>Revision History .....</b>                                     | <b>27</b> |

**Abstract**

## **1 Abstract**

This document is an engineering report of an universal input 30 W 12 V off-line flyback converter power supply utilizing F3R CoolSET™ ICE3RBR0665JG. The application demo board is operated in Discontinuous Conduction Mode (DCM) and is running at 65 kHz fixed switching frequency. It has a single output voltage with secondary side control regulation. It is especially suitable for small power supply such as enclosed adapter, blu-ray/DVD player, set-top box, game console, smart meter or open frame auxiliary power supply of white goods, PC, server, etc. Besides having the basic features of the F3 CoolSET™ such as Active Burst Mode, propagation delay compensation, soft gate drive, auto restart protection for serious fault (Vcc over voltage protection, Vcc under voltage protection, over temperature, over-load, open loop and short opto-coupler), it also has the BiCMOS technology design, built-in soft start time, built-in and extendable blanking time, frequency jitter feature with built-in jitter period and external auto-restart enable, etc. The key features of this product are the best-in-class low standby power and the good EMI performance.

## 2 Demonstrator board

This document contains the list of features, the power supply specification, schematic, bill of material and the transformer construction documentation. Typical operating characteristics such as performance curve and scope waveforms are showed at the rear of the report.



Figure 1 DEMO-3RBR0665JG (Top View)

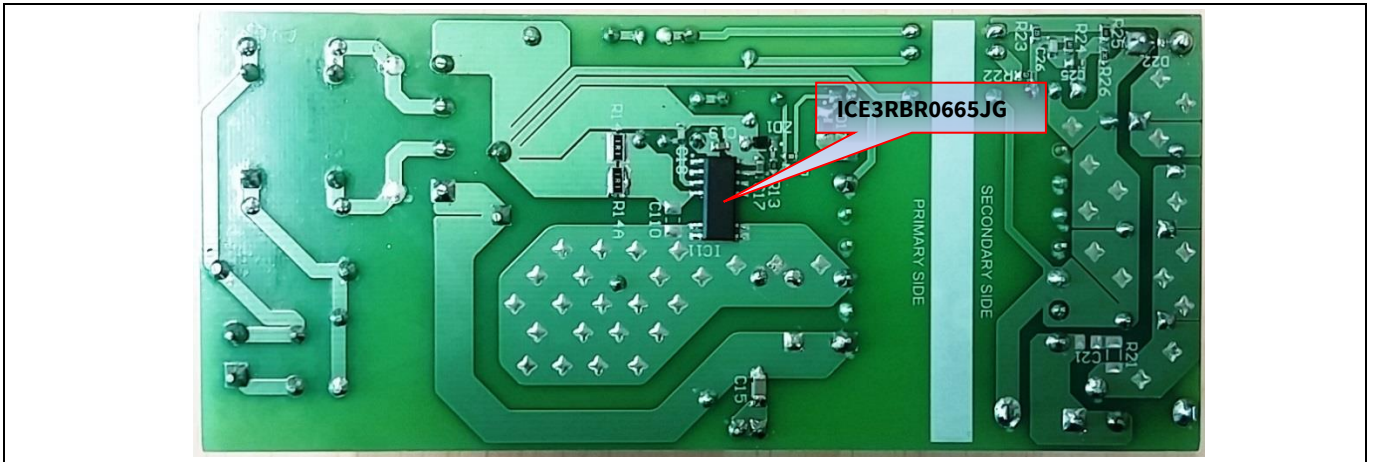


Figure 2 DEMO-3RBR0665JG (Bottom view)

### 3 Specifications of Demonstrator Board

**Table 1 Specifications of DEMO-3RBR0665JG**

|   |   |
|---|---|
| Input voltage and frequency   | 85 V <sub>AC</sub> (60 Hz) ~ 265 V <sub>AC</sub> (50Hz)                   |
| Output voltage, current and power   | 12 V, 2.5 A, 30 W   |
| Dynamic load response<br>(10% to 100% load, slew rate at 1.5 A/μs, 100 Hz)                      | ±3% of nominal output voltage<br>(V <sub>ripple_p-p</sub> < 250 mV)       |
| Output ripple voltage<br>(full load, 85 V <sub>AC</sub> ~ 265 V <sub>AC</sub> )                 | ±1% of nominal output voltage<br>(V <sub>ripple_p-p</sub> < 50 mV)        |
| Active mode four point average efficiency (25%, 50%, 75%, 100% load) (EU CoC Version 5, Tier 1) | > 85% at 115 V <sub>AC</sub> and 230 V <sub>AC</sub>                      |
| 10% load efficiency (EU CoC Version 5, Tier 1)  | > 80% at 115 V <sub>AC</sub> and 230 V <sub>AC</sub>                      |
| No load power consumption (EU CoC Version 5, Tier 1)  | < 50 mW at 265 V <sub>AC</sub>  |
| Conducted emissions (EN55022 class B)   | Pass with 7 dB margin   |
| ESD immunity (EN61000-4-2)  | Special Level (±10 kV for both contact and air discharge)                 |
| Surge immunity (EN61000-4-5)  | Installation class 3 (±2 kV for line to line and ±2 kV for line to earth) |
| Form factor case size (L x W x H)   | (120 x 52 x 26) mm <sup>3</sup>   |

**Circuit description**

## **4 Circuit description**

### **4.1 Line input**

The AC line input side comprises the input fuse F1 as over-current protection. The choke L11, X-capacitors C11, and Y-capacitor C12 act as EMI suppressors. Optional spark gap device SA1, SA2 and varistor VAR can absorb high voltage stress during lightning surge test. After the bridge rectifier BR1 and the input bulk capacitor C13, a voltage of 90 to 375 V<sub>DC</sub> is present which depends on input line voltage.

### **4.2 Start up**

Since there is a built-in startup cell in the ICE3RBR0665JG, no external start up resistor is required. The startup cell is connecting the drain pin of the IC. Once the voltage is built up at the drain pin of the ICE3RBR0665JG, the startup cell will charge up the VCC capacitor C16 and C17. When the V<sub>VCC</sub> exceeds the on-threshold (V<sub>VCC</sub> = 18 V), the IC starts up. Then the VCC voltage is bootstrapped by the auxiliary winding to sustain the operation.

### **4.3 Operation mode**

During operation, the VCC pin is supplied via a separate transformer winding with associated rectification D12 and buffering C16 and C17. In order not to exceed the maximum voltage at VCC pin due to poor coupling of transformer winding, an external zener diode ZD11 and resistor R13 can be added.

### **4.4 Soft start**

The soft start is a built-in function and is set at 20 ms.

### **4.5 RCD clamper circuit**

While turns off the CoolMOS™, the clamper circuit R11, C15 and D11 absorbs the current caused by transformer leakage inductance once the voltage exceeds designed clamp voltage. Finally drain to source voltage is lower than the maximum break down voltage of CoolMOS™.

### **4.6 Peak current control of primary current**

The CoolMOS™ drain source current is sensed via external shunt resistors R14 and R14A which determine the tolerance of the current limit control. Since ICE3RBR0665JG is a current mode controller, it would have a cycle-by-cycle primary current and feedback voltage control which can make sure the maximum power of the converter is controlled in every switching cycle. Besides, the patented propagation delay compensation is implemented to ensure the maximum input power can be controlled in an even tighter manner. The demo board shows approximately ±1.04% of average maximum input power (Figure 12).

### **4.7 Output stage**

On the secondary side the power is coupled out by a schottky diode D21. The capacitor C22 and C23 provide energy buffering following with the LC filter L21 and C24 to reduce the output voltage ripple considerably. Storage capacitors C22 and C23 are selected to have a very small internal resistance (ESR) to minimize the output voltage ripple.

### **4.8 Feedback and regulation**

The output voltage is controlled using a TL431 (IC21). This device incorporates the voltage reference as well as the error amplifier and a driver stage. Compensation network C25, C26, R24, R25 and R26 constitutes the

## Circuit description

external circuitry of the error amplifier of IC21. This circuitry allows the feedback to be precisely matched to dynamically varying load conditions and provides stable control. The maximum current through the optocoupler diode and the voltage reference is set by using resistors R22 and R23. Optocoupler IC12 is used for floating transmission of the control signal to the “Feedback” input via capacitor C18. The optocoupler used meets DIN VDE 884 requirements for a wider creepage distance.

### 4.9 Active burst mode

At light load condition, the SMPS enters into Active Burst Mode. At this start, the controller is always active and thus the VCC must always be kept above the switch off threshold  $V_{CCoff} \geq 10.5$  V. During active burst mode, the efficiency increases significantly and at the same time it supports low ripple on  $V_{OUT}$  and fast response on load jump. When the voltage level at FB falls below 1.35 V, the internal blanking timer starts to count. When it reaches the built-in 20 ms blanking time, it will enter Active Burst Mode. The Blanking Window is generated to avoid sudden entering of Burst Mode due to load jump.

During Active Burst Mode the current sense voltage limit is reduced from 1.03 V to 0.34 V so as to reduce the conduction losses and audible noise. All the internal circuits are switched off except the reference and bias voltages to reduce the total VCC current consumption to below 450  $\mu$ A. At burst mode, the FB voltage is changing like a saw tooth between 3 and 3.5 V. To leave Burst Mode, FB voltage must exceed 4 V. It will reset the Active Burst Mode and turn the SMPS into Normal Operating Mode. Maximum current can then be provided to stabilize  $V_{OUT}$ .

### 4.10 Jittering and soft gate drive

In order to reduce the emissions of electromagnetic interference (EMI) due to switching noise, the ICE3RBR0665JG is implemented with frequency jittering and soft gate drive. The jitter frequency is internally set to 65 kHz ( $\pm 2.6$  kHz) and the jitter period is 4 ms.

### 4.11 Protection function

Protection is one of the major factors to determine whether the system is safe and robust. Therefore sufficient protection is necessary. ICE3RBR0665JG provides all the necessary protections to ensure the system is operating safely. The protections include VCC over voltage, over load/open loop, VCC under voltage/short optocoupler, over temperature, external protection enable and brownout. When those faults are found, the system will go into auto restart which means the system will stop for a short period of time and restart again. If the fault persists, the system will stop again. It is then until the fault is removed, the system resumes to normal operation. A list of protections and the failure conditions are showed in the below table.

**Circuit description**

**Table 2 Protection function of ICE3RBR0665JG**

| <b>Protection function</b>               | <b>Failure condition</b>  | <b>Protection Mode</b> |
|--|---|------------------------|
| Vcc Overvoltage                          | 1. $V_{VCC} > 20.5 \text{ V}$ and $FB > 4.0 \text{ V}$ & during soft start period<br>2. $V_{VCC} > 25.5 \text{ V}$                                  | Auto Restart           |
| Overtemperature<br>(controller junction) | $T_J > 130^\circ\text{C}$   | Auto Restart           |
| Overload / Open loop                     | $V_{FB} > 4.0 \text{ V}$ , last for 20 ms and extended blanking time<br>(Extended blanking time counted from charging $V_{BA}$ from 0.9 V to 4.0 V) | Auto Restart           |
| Vcc Undervoltage / Short<br>Optocoupler  | $V_{VCC} < 10.5 \text{ V}$  | Auto Restart           |
| Auto Restart enable                      | $V_{BA} < 0.33 \text{ V}$   | Auto Restart           |



Circuit diagram

5 Circuit diagram

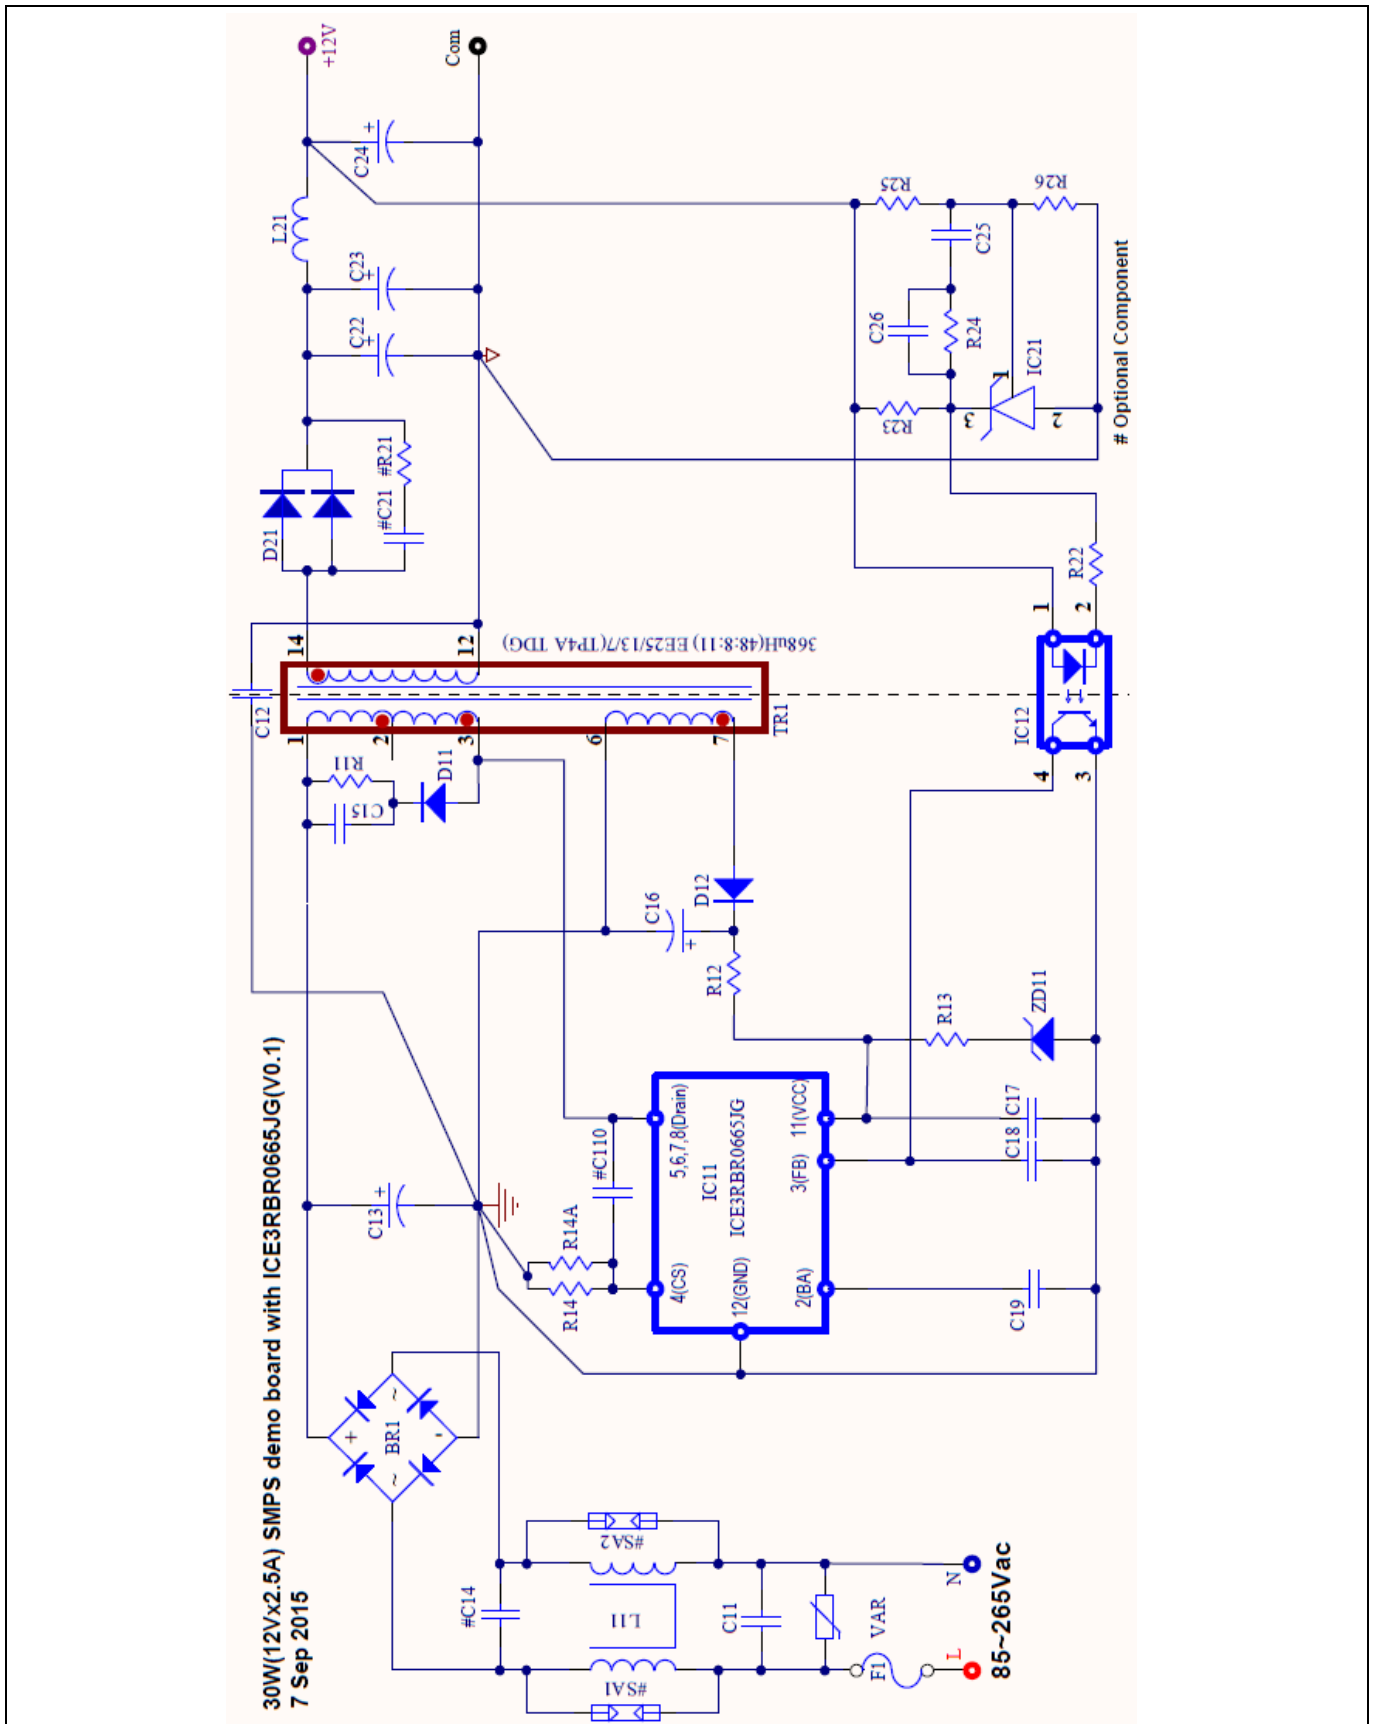


Figure 3 Schematic of DEMO-3RBR0665JG

**Circuit diagram**

*Note: General guideline for layout design of Printed Circuit Board (PCB):*

1. *Star ground at bulk capacitor C13: all primary grounds should be connected to the ground of bulk capacitor C13 separately in one point. It can reduce the switching noise going into the sensitive pins of CoolSET™ device effectively. The primary star ground can be split into five groups as follows,*
  - i. *Signal ground includes all small signal grounds connecting to the CoolSET™ GND pin such as filter capacitor ground C17, C18, C19 and opto-coupler ground.*
  - ii. *VCC ground includes the VCC capacitor ground C16 and the auxiliary winding ground, pin 5 of the power transformer.*
  - iii. *Current Sense resistor ground includes current sense resistor R14 and R14A.*
  - iv. *EMI return ground includes Y capacitor C12.*
  - v. *DC ground from bridge rectifier, BR1*
2. *Filter capacitor close to the controller ground: Filter capacitors, C17, C18 and C19 should be placed as close to the controller ground and the controller pin as possible so as to reduce the switching noise coupled into the controller.*
3. *High voltage traces clearance: High voltage traces should keep enough spacing to the nearby traces. Otherwise, arcing would incur.*
  - i. *400 V traces (positive rail of bulk capacitor C13) to nearby trace: > 2.0 mm*
  - ii. *600V traces (drain voltage of CoolSET™ IC11) to nearby trace: > 2.5 mm*
4. *Recommended minimum 232mm<sup>2</sup> copper area at drain pin to add on PCB for better thermal performance.*
5. *Power loop area (bulk capacitor C13, primary winding of the transformer TR1 (Pin 1 and 3), IC11 Drain pin, IC11 CS pin and current sense resistor R14/R14A) should be as small as possible to minimize the switching emission.*

PCB layout

## 6 PCB layout

### 6.1 Top side

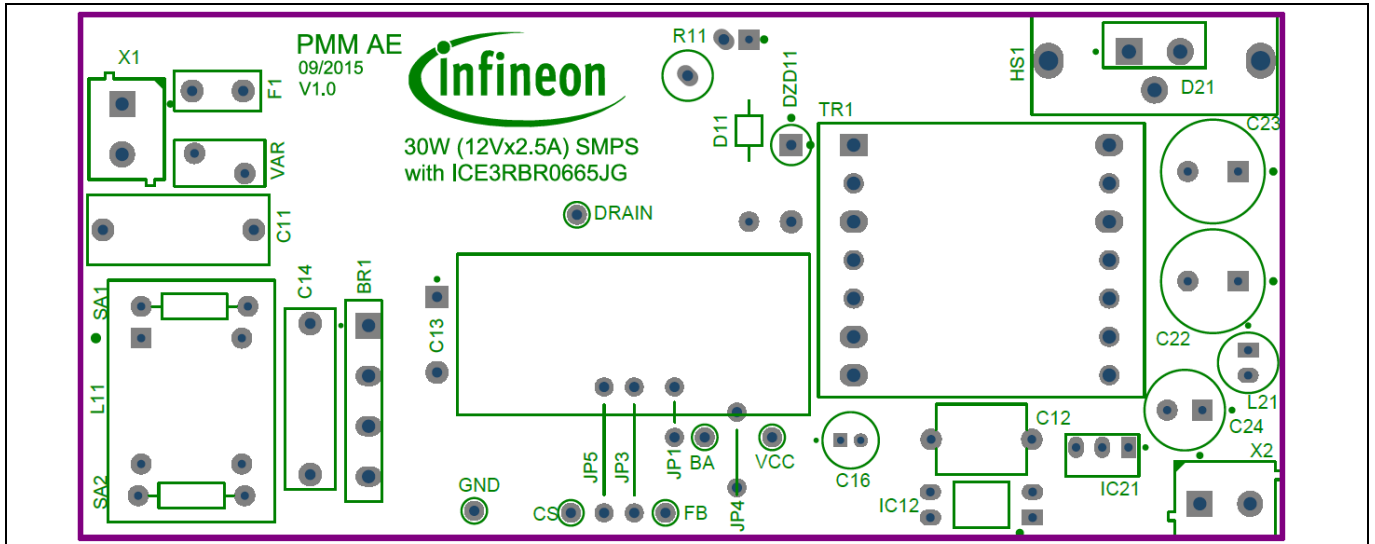


Figure 4 Top side component legend

### 6.2 Bottom side

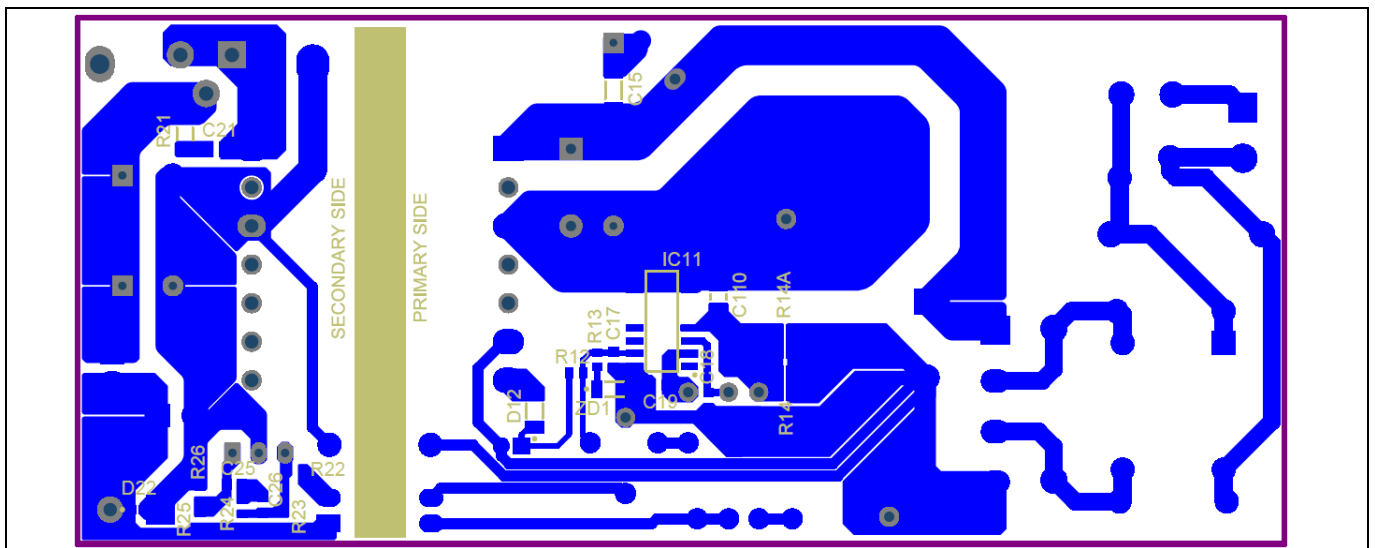


Figure 5 Bottom side copper and component legend

**Bill of material**

## 7 Bill of material

**Table 3 Bill of material (V0.4)**

| No. | Designator           | Description              | Part Number         | Manufacturer      | Quantity |
|-----|----------------------|--------------------------|---------------------|-------------------|----------|
| 1   | BR1                  | 600V/2A                  | DS2B60A             | Shindengen        | 1        |
| 2   | C11                  | 0.1 $\mu$ F/305V         | B329221C3104        | Epcos             | 1        |
| 3   | C12                  | 2.2nF/500V               | DE1E3RA222MA4BQ     | Murata            | 1        |
| 4   | C13                  | 82 $\mu$ F/450V          | 450BXW82MEFC16X35   | Rubycon           | 1        |
| 5   | C15                  | 1nF/600V                 | GRM31A7U2J102JW31D9 | Murata            | 1        |
| 6   | C16                  | 22 $\mu$ F/50V           | 50PX22MEFC5X11      | Rubycon           | 1        |
| 7   | C17, C19             | 100nF/50V                | GRM188R71H104KA93D  | Murata            | 2        |
| 8   | C18, C26             | 1nF/50V                  | GRM1885C1H102GA01D  | Murata            | 2        |
| 9   | C22                  | 1200 $\mu$ F/16V         | 16ZLK1200M10X20     | Rubycon           | 1        |
| 10  | C23                  | 1200 $\mu$ F/16V         | 16ZLK1200M10X20     | Rubycon           | 1        |
| 11  | C24                  | 680 $\mu$ F/16V          | 16ZLH680MEFC8X16    | Rubycon           | 1        |
| 12  | C25                  | 220nF/50V                | GRM188R71H224KAC4D  | Murata            | 1        |
| 13  | D11                  | 0.8A/600V                | D1NK60              | Shindengen        | 1        |
| 14  | D12                  | 0.25A/200V               | BAS21-03W           | Infineon          | 1        |
| 15  | D21                  | 30A/100V                 | STPS30M100SFP       |                   | 1        |
| 16  | F1                   | 1.6A/300V                | 36911600000         |                   | 1        |
| 17  | HS1                  | Heat Sink(D21)           | 574502B03300G       |                   | 1        |
| 18  | IC11                 | ICE3RBR0665JG(DSO-16/12) | ICE3RBR0665JG       | Infineon          | 1        |
| 19  | IC12                 | SFH617A-3(DIP-4)         | SFH617A-3           |                   | 1        |
| 20  | IC21                 | TL431BVLPG(T0-92)        | TL431BVLPG          |                   | 1        |
| 21  | L11                  | 47mH/0.65A               | 750342434           | Würth Electronics | 1        |
| 22  | L21                  | 2.2 $\mu$ H/4.3A         | 744 746 202 2       | Würth Electronics | 1        |
| 23  | R11                  | 68k/2W/500V              | RSF200JB-73-68K     |                   | 1        |
| 24  | R12                  | 10 $\Omega$ (0603)       |                     |                   | 1        |
| 25  | R13                  | 10 $\Omega$ (0603)       |                     |                   | 1        |
| 26  | R14, R14A            | 1.1 $\Omega$ /0.75W      | ERJB2BF1R1V         |                   | 2        |
| 27  | R22                  | 820 $\Omega$ /0603       |                     |                   | 1        |
| 28  | R23                  | 1.2k $\Omega$ /0603      |                     |                   | 1        |
| 29  | R24                  | 68k $\Omega$ /0603       |                     |                   | 1        |
| 30  | R25                  | 38k $\Omega$ /1%/0603    |                     |                   | 1        |
| 31  | R26                  | 10k $\Omega$ /1%/0603    |                     |                   | 1        |
| 32  | TR1                  | 368 $\mu$ H(48:8:11)     | 750343023           | Würth Electronics | 1        |
| 33  | Test point           | BA,FB,CS,Drain,Vcc,Gnd   | 5003                |                   | 1        |
| 34  | VAR                  | 275/0.25W                | B72207S2271K101     | Epcos             | 1        |
| 35  | ZD11                 | 22V Zener                | UDZS22B             |                   | 1        |
| 36  | (L N),<br>(+12V Com) | Connector                | 691102710002(WE)    | Würth Electronics | 2        |

Transformer construction

## 8 Transformer construction

Core and material: EE25/13/7(EF25), TP4A (TDG)

Bobbin: 14-Pins, THT, horizontal version (070-5644)

Primary Inductance:  $L_p = 368 \mu\text{H}$  ( $\pm 10\%$ ), measured between pin 1 and pin 3

Manufacturer and part number: Würth Electronics Midcom (750343023)

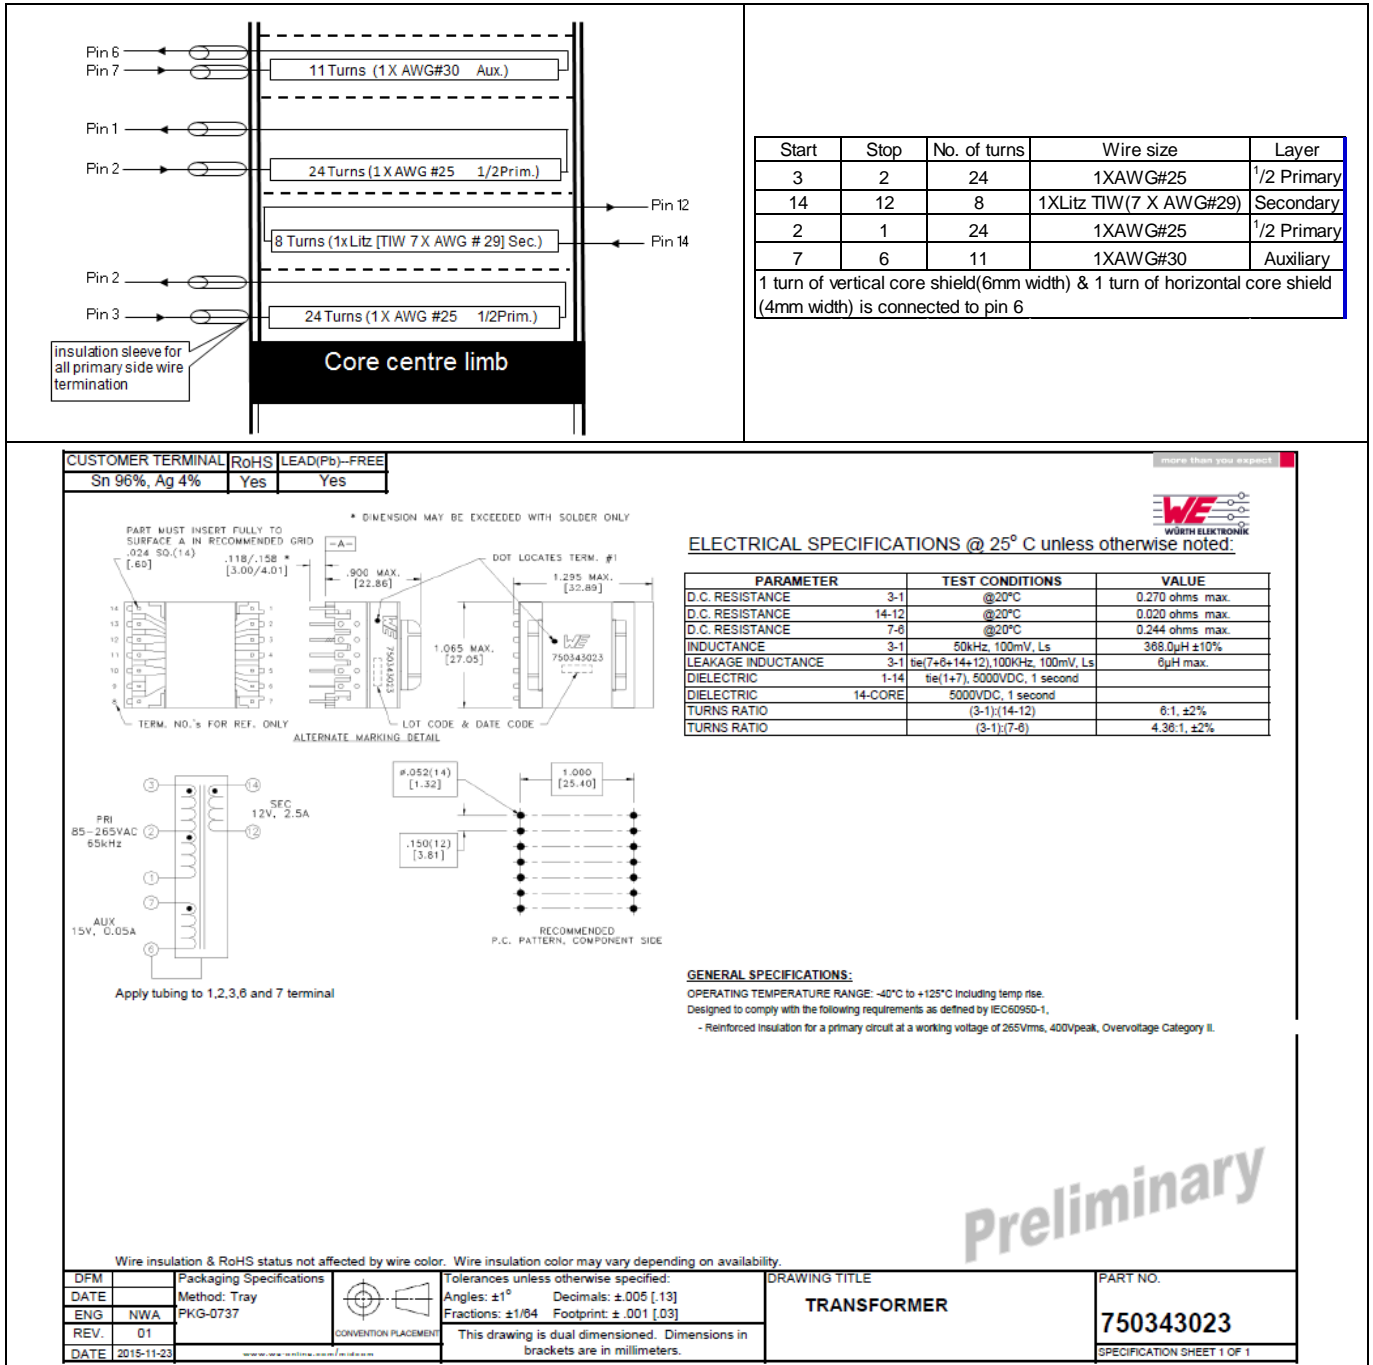


Figure 6 Transformer structure

Test results

## 9 Test results

### 9.1 Efficiency, regulation and output ripple

**Table 4 Efficiency, regulation & output ripple**

| Input<br>(V <sub>AC</sub> /Hz) | P <sub>in</sub><br>(W) | V <sub>out</sub><br>(V <sub>DC</sub> ) | I <sub>out</sub><br>(A) | V <sub>OutRPP</sub><br>(mV) | P <sub>out</sub><br>(W) | Efficiency<br>(η) (%) | Average<br>η (%) | OLP P <sub>in</sub><br>(W) | OLP I <sub>out</sub><br>(A) |
|--------------------------------|------------------------|--|-------------------------|-----------------------------|-------------------------|-----------------------|------------------|----------------------------|-----------------------------|
| 85 V <sub>AC</sub> /60 Hz      | 0.03193                | 12.02                                  | 0.00                    | 31.65                       | /                       | /                     | /                | 49.75                      | 3.34                        |
|                                | 3.58                   | 12.02                                  | 0.25                    | 39.61                       | 3.01                    | 83.94                 | /                |                            |                             |
|                                | 8.99                   | 12.02                                  | 0.63                    | 5.71                        | 7.51                    | 83.57                 | 84.04            |                            |                             |
|                                | 17.55                  | 12.02                                  | 1.25                    | 7.42                        | 15.03                   | 85.61                 |                  |                            |                             |
|                                | 26.73                  | 12.02                                  | 1.88                    | 8.84                        | 22.54                   | 84.32                 |                  |                            |                             |
|                                | 36.35                  | 12.02                                  | 2.50                    | 12.36                       | 30.05                   | 82.67                 |                  |                            |                             |
| 115 V <sub>AC</sub> /60 Hz     | 0.03178                | 12.02                                  | 0.00                    | 32.22                       | /                       | /                     | /                | 49.37                      | 3.45                        |
|                                | 3.56                   | 12.02                                  | 0.25                    | 40.56                       | 3.01                    | 84.41                 | /                |                            |                             |
|                                | 8.74                   | 12.02                                  | 0.63                    | 5.83                        | 7.51                    | 85.96                 | 86.16            |                            |                             |
|                                | 17.27                  | 12.02                                  | 1.25                    | 7.45                        | 15.03                   | 87.00                 |                  |                            |                             |
|                                | 26.13                  | 12.02                                  | 1.88                    | 9.02                        | 22.54                   | 86.25                 |                  |                            |                             |
|                                | 35.18                  | 12.02                                  | 2.50                    | 10.17                       | 30.05                   | 85.42                 |                  |                            |                             |
| 230 V <sub>AC</sub> /50 Hz     | 0.03550                | 12.02                                  | 0.00                    | 35.28                       | /                       | /                     | /                | 49.71                      | 3.56                        |
|                                | 3.61                   | 12.02                                  | 0.25                    | 44.59                       | 3.01                    | 83.24                 | /                |                            |                             |
|                                | 8.99                   | 12.02                                  | 0.63                    | 6.15                        | 7.51                    | 83.57                 | 85.96            |                            |                             |
|                                | 17.75                  | 12.02                                  | 1.25                    | 7.54                        | 15.03                   | 84.65                 |                  |                            |                             |
|                                | 25.66                  | 12.02                                  | 1.88                    | 8.75                        | 22.54                   | 87.83                 |                  |                            |                             |
|                                | 34.22                  | 12.02                                  | 2.50                    | 10.07                       | 30.05                   | 87.81                 |                  |                            |                             |
| 265V <sub>AC</sub> /50 Hz      | 0.03778                | 12.02                                  | 0.00                    | 37.55                       | /                       | /                     | /                | 50.41                      | 3.6                         |
|                                | 3.65                   | 12.02                                  | 0.25                    | 47.43                       | 3.01                    | 82.33                 | /                |                            |                             |
|                                | 9.06                   | 12.02                                  | 0.63                    | 5.91                        | 7.51                    | 82.92                 | 86.11            |                            |                             |
|                                | 17.49                  | 12.02                                  | 1.25                    | 7.57                        | 15.03                   | 85.91                 |                  |                            |                             |
|                                | 25.68                  | 12.02                                  | 1.88                    | 8.58                        | 22.54                   | 87.76                 |                  |                            |                             |
|                                | 34.20                  | 12.02                                  | 2.50                    | 9.78                        | 30.05                   | 87.87                 |                  |                            |                             |

Test results

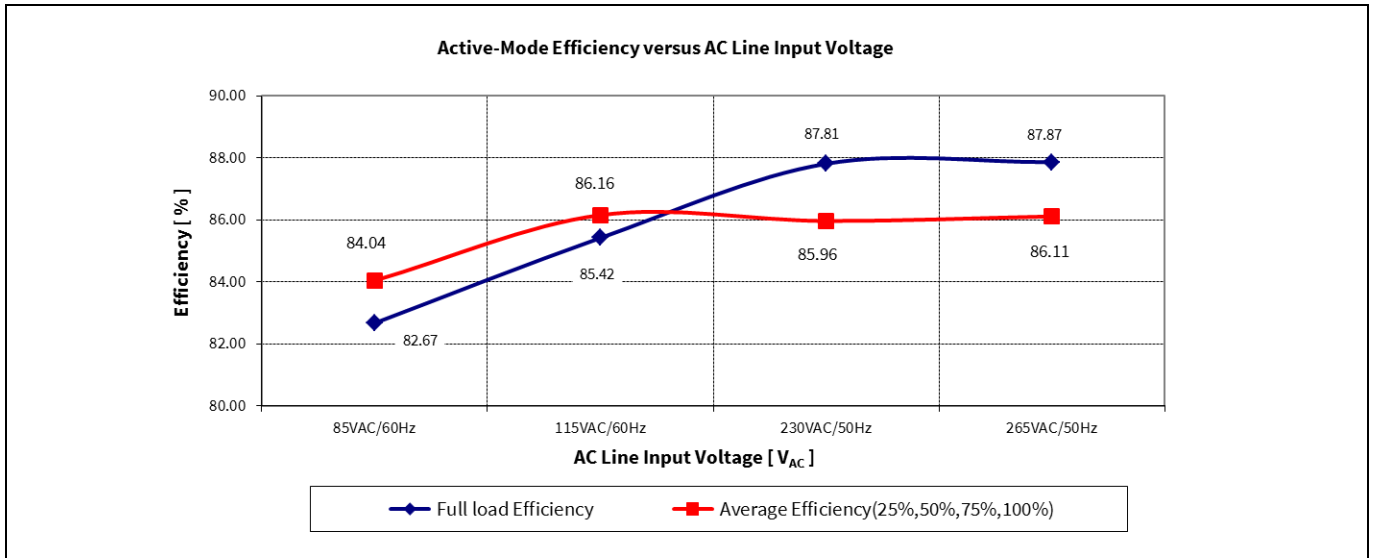


Figure 7 Efficiency vs AC line input voltage

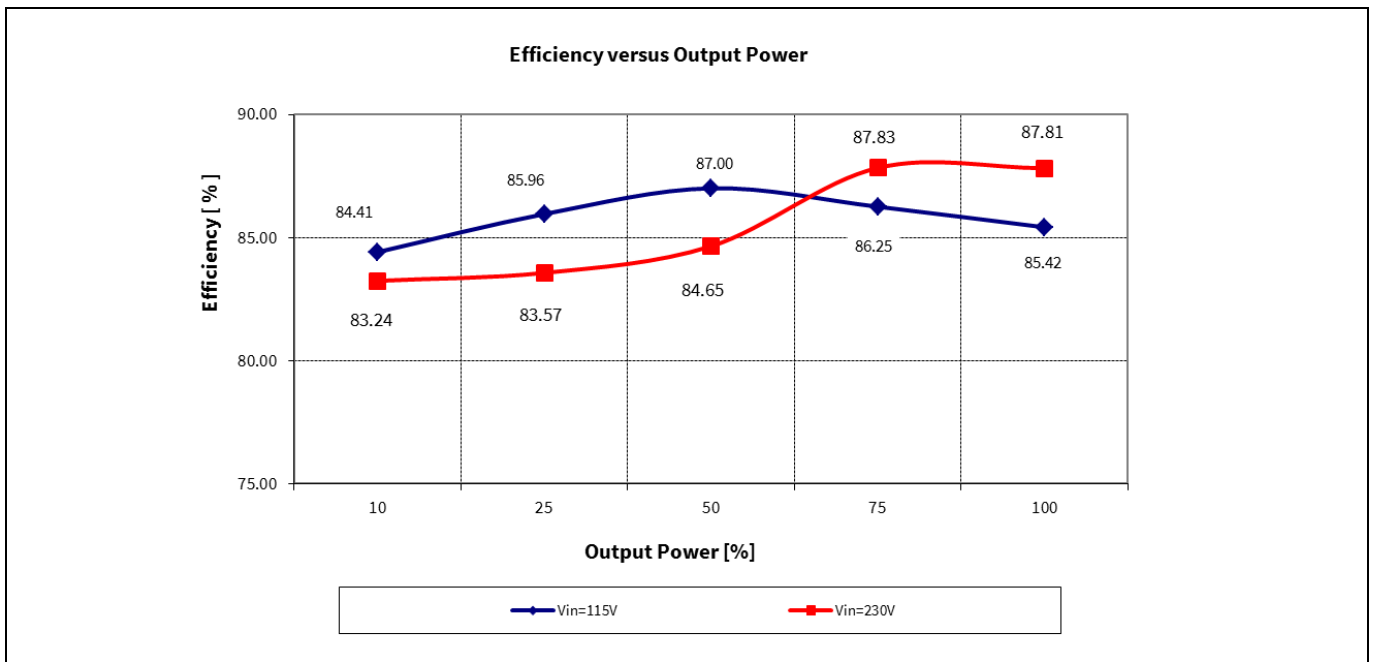


Figure 8 Efficiency vs output power at 115 V<sub>AC</sub> and 230 V<sub>AC</sub> line

Test results

### 9.2 Standby power

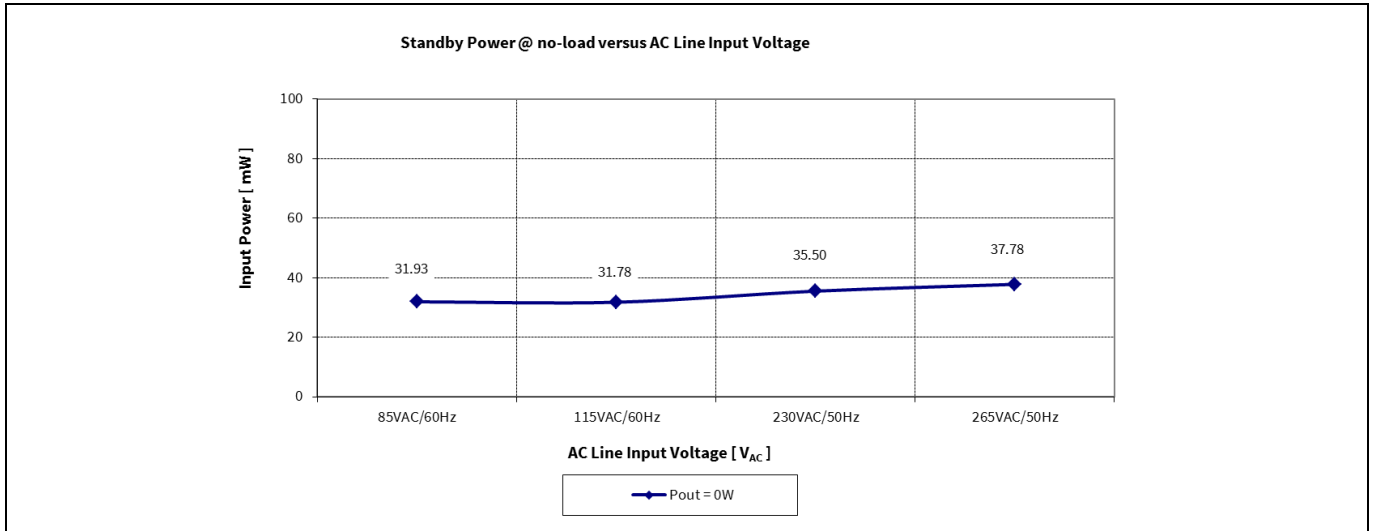


Figure 9 Standby power at no load vs AC line input voltage (measured by Yokogawa WT210 power meter - integration mode)

### 9.3 Line regulation

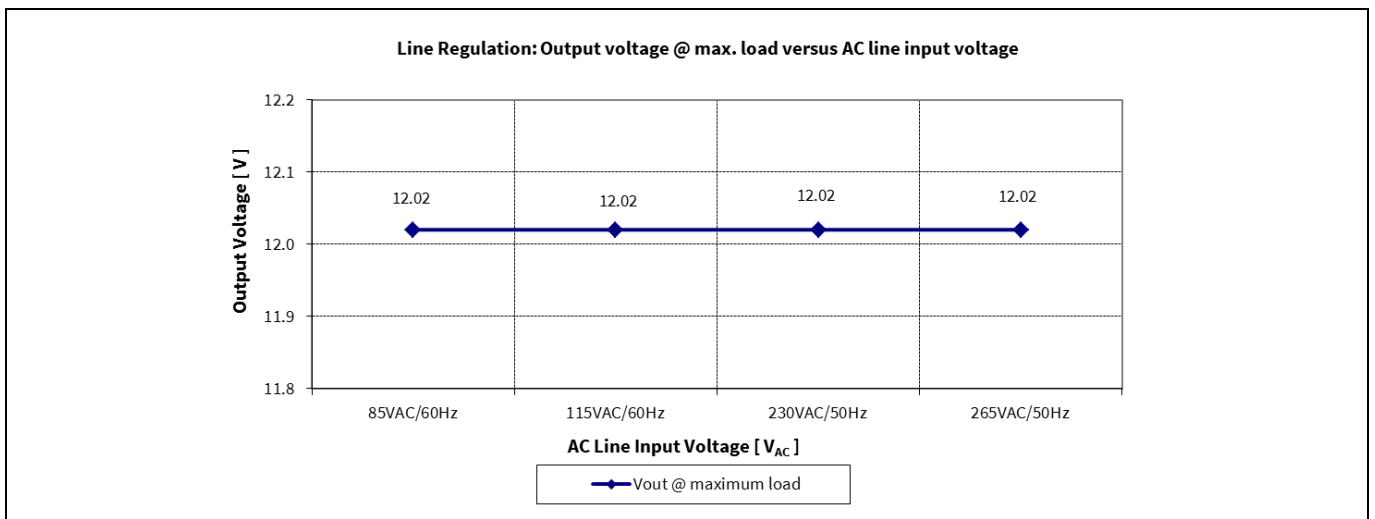


Figure 10 Line regulation Vout at full load vs AC line input voltage



Test results

### 9.4 Load regulation

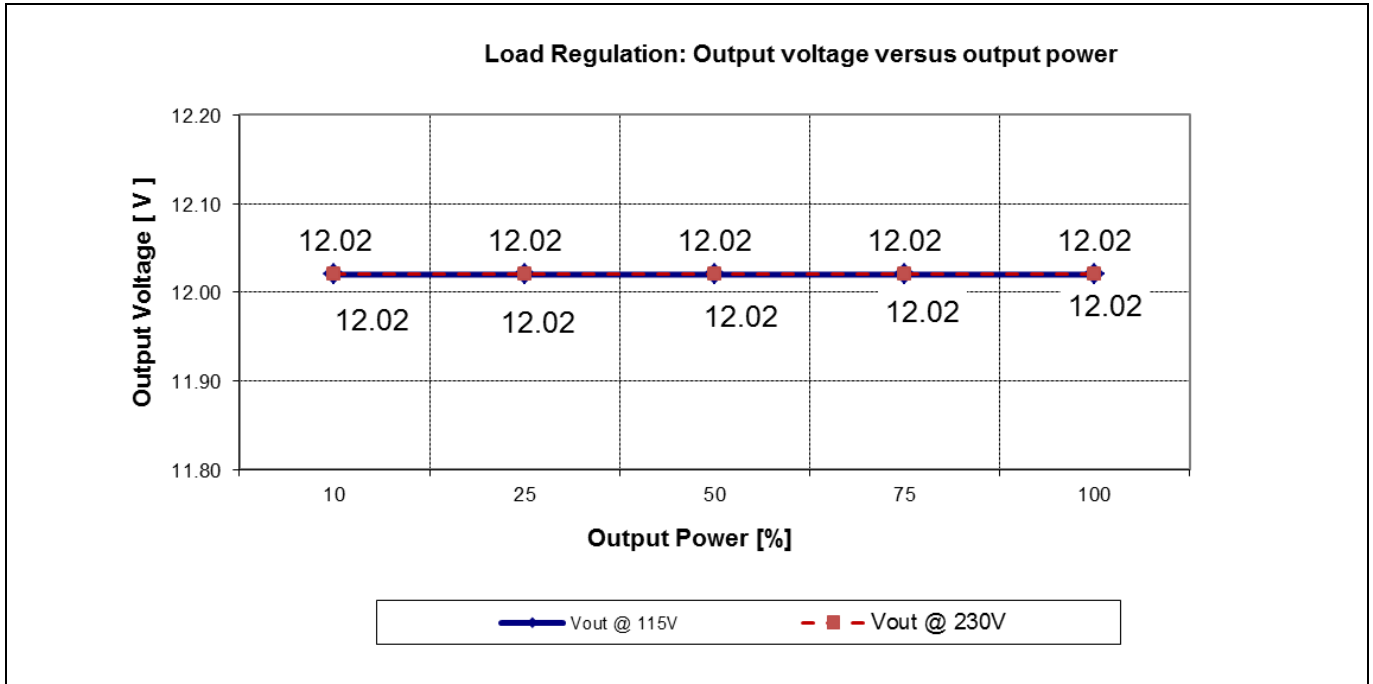


Figure 11 Load regulation  $V_{out}$  vs output power

### 9.5 Maximum input power

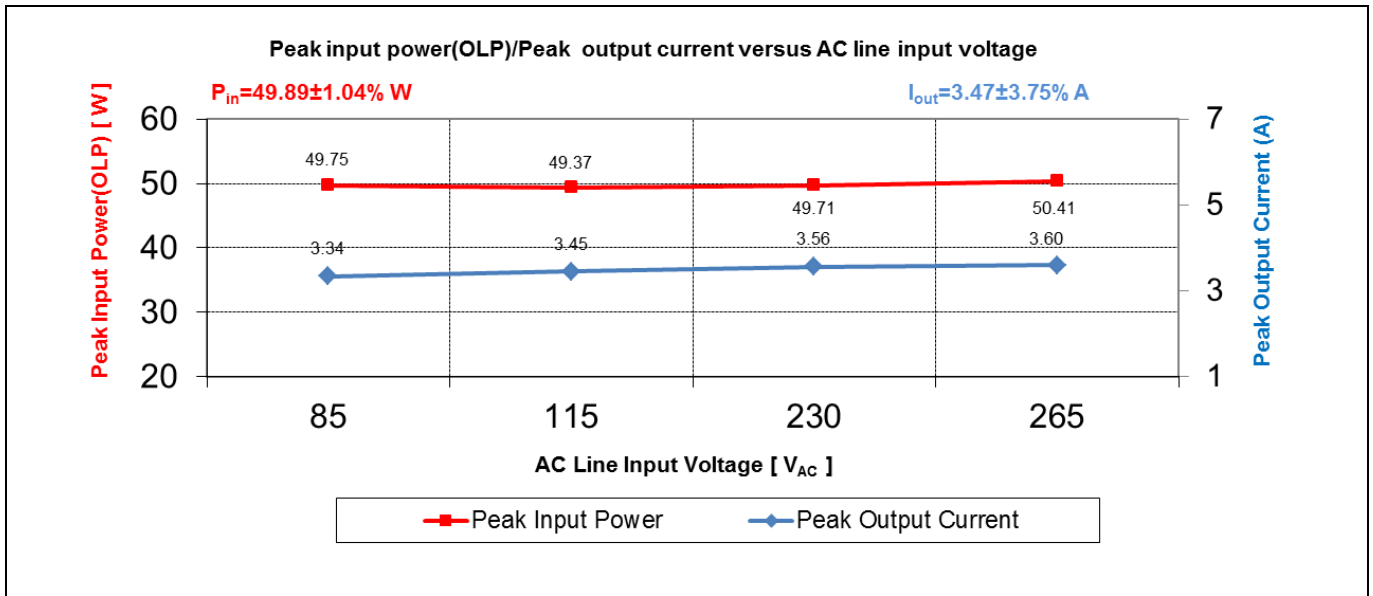


Figure 12 Maximum input power (before over-load protection) vs AC line input voltage

### 9.6 ESD immunity (EN61000-4-2)

Pass EN61000-4-2 Special Level ( $\pm 10$  kV for both contact and air discharge).

### 9.7 Surge immunity (EN61000-4-5)

Pass EN61000-4-5 Installation class 3 ( $\pm 2$  kV for line to line and  $\pm 2$  kV for line to earth).

Test results

9.8 Conducted emissions (EN55022 class B)

The conducted EMI was measured by Schaffner (SMR4503) and followed the test standard of EN55022 (CISPR 22) class B. The demo board was set up at maximum load (30 W) with input voltage of 115 V<sub>AC</sub> and 230 V<sub>AC</sub>.

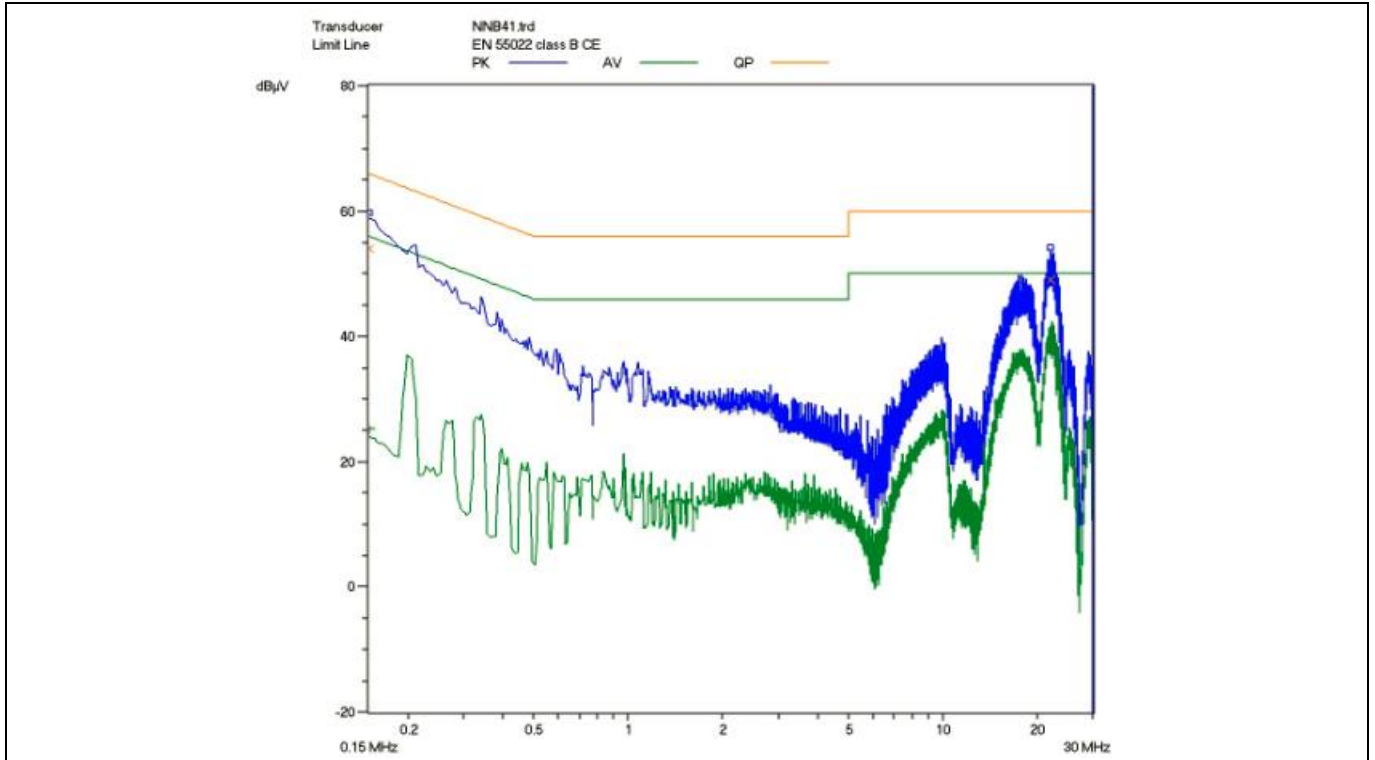


Figure 13 Conducted emissions(Line) at 115 V<sub>AC</sub> and maximum Load

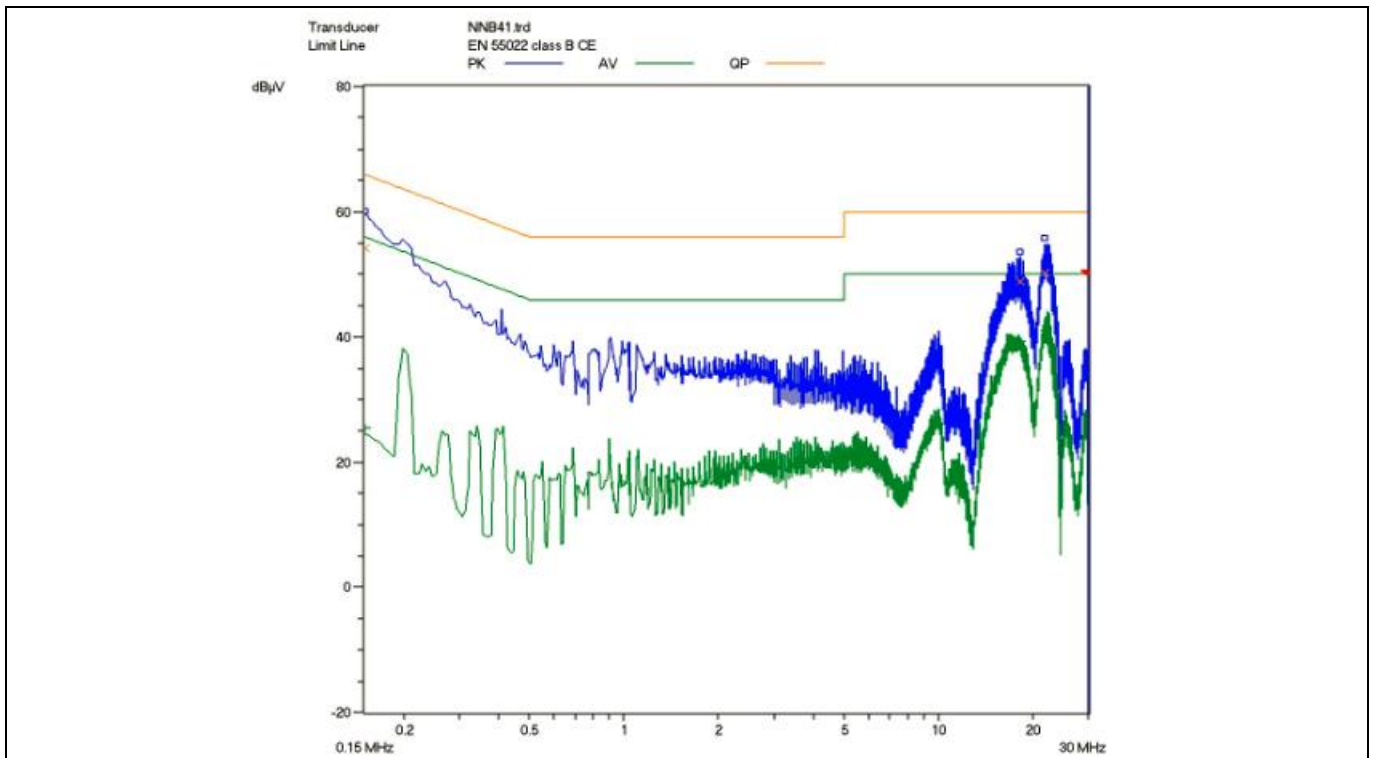


Figure 14 Conducted emissions(Neutral) at 115 V<sub>AC</sub> and maximum Load

Test results

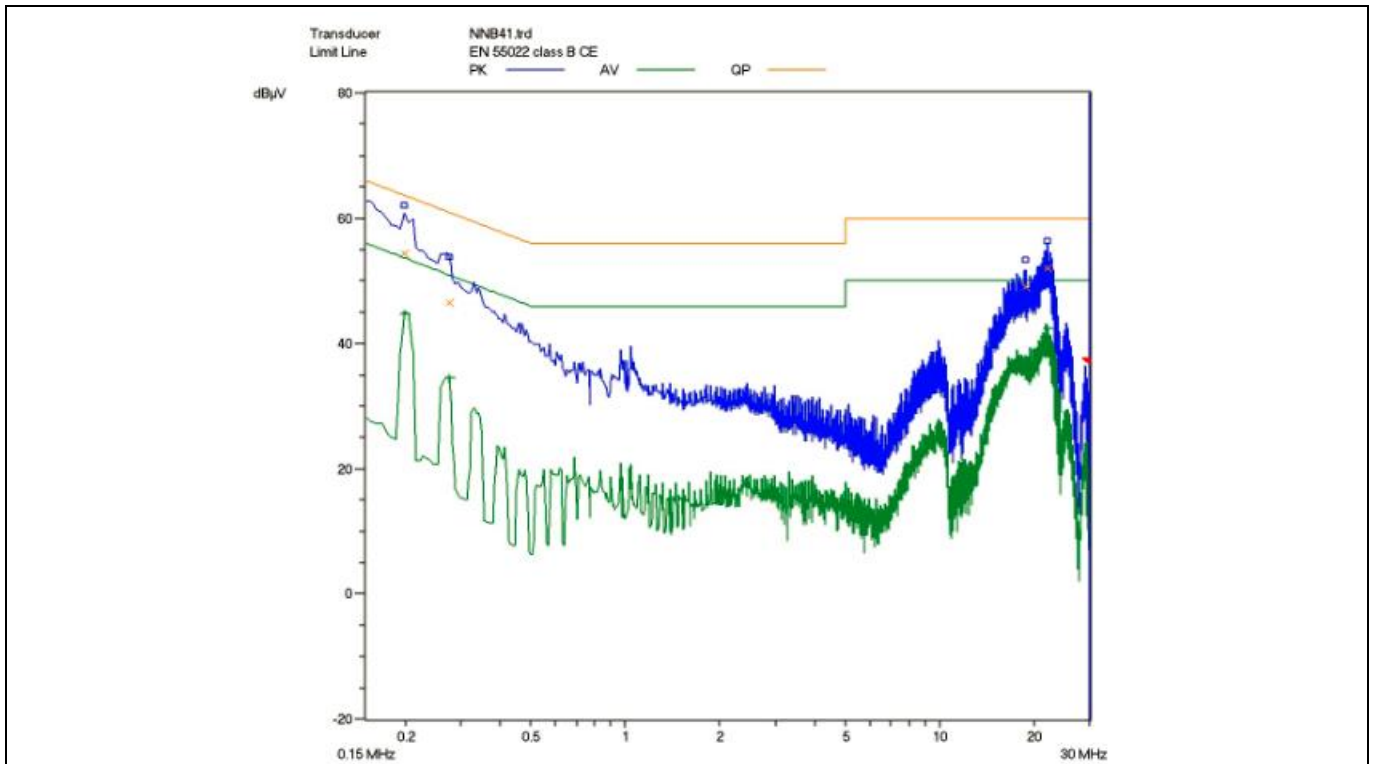


Figure 15 Conducted emissions(line) at 230 V<sub>AC</sub> and maximum Load

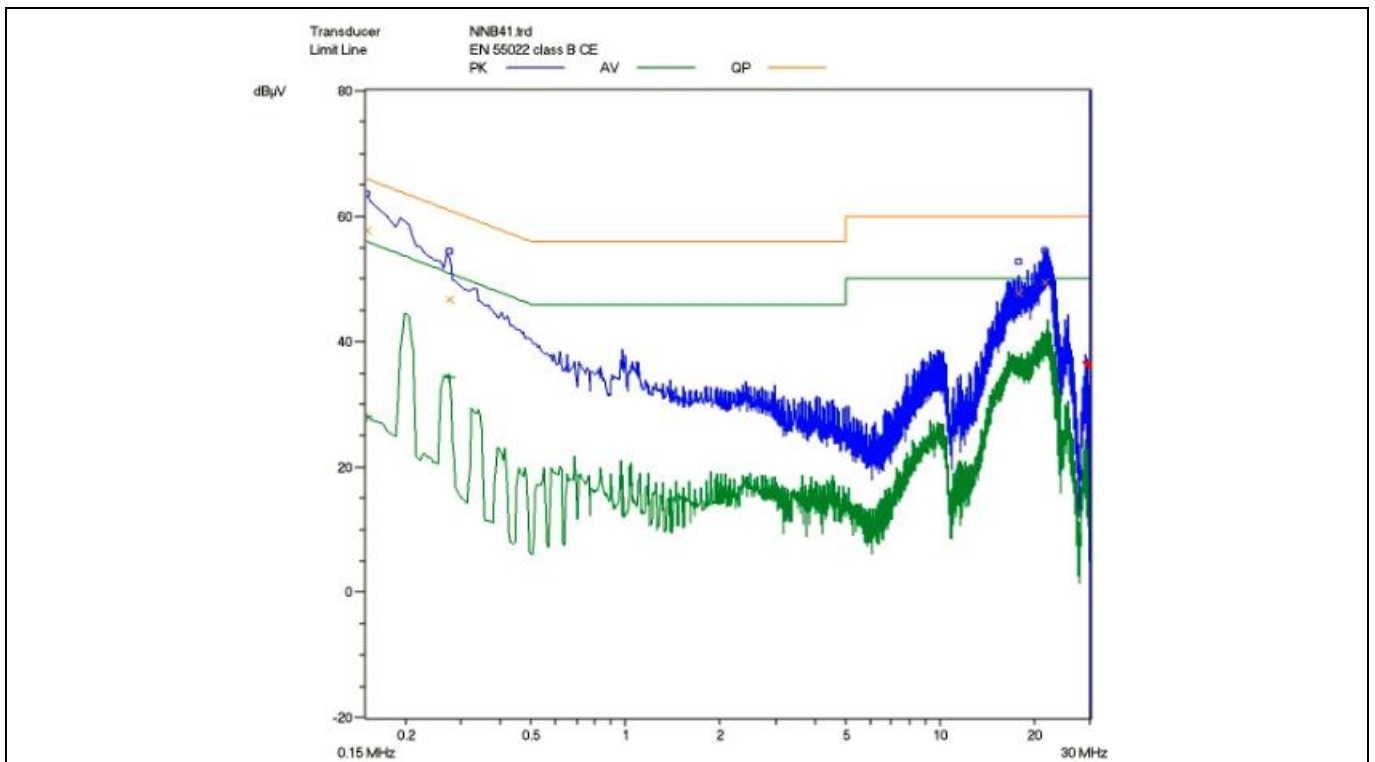


Figure 16 Conducted emissions(Neutral) at 230 V<sub>AC</sub> and maximum Load

Pass conducted emissions EN55022 (CISPR 22) class B with 7 dB margin.


Test results

### 9.9 Thermal measurement

The thermal test of open frame demo board was done using an infrared thermography camera (TVS-500EX) at ambient temperature 25°C. The measurements were taken after two hours running at full load.

**Table 5 Hottest temperature of demo board**

| No. | Major component              | 85 V <sub>AC</sub> (°C) | 265 V <sub>AC</sub> (°C) |
|-----|------------------------------|-------------------------|--------------------------|
| 1   | IC11 (3RBR0665JG)            | 63.2                    | 59.0                     |
| 2   | R14 (current sense resistor) | 53.6                    | 41.8                     |
| 3   | TR1 (transformer)            | 56.4                    | 59.7                     |
| 4   | BR1 (bridge diode)           | 56.1                    | 36.3                     |
| 5   | R11(clamper resistor)        | 34.4                    | 33.4                     |
| 6   | L11 (EMI choke)              | 96.6                    | 38.2                     |
| 7   | D21 (secondary diode)        | 65.6                    | 66.0                     |
| 8   | Ambient                      | 25                      | 25                       |

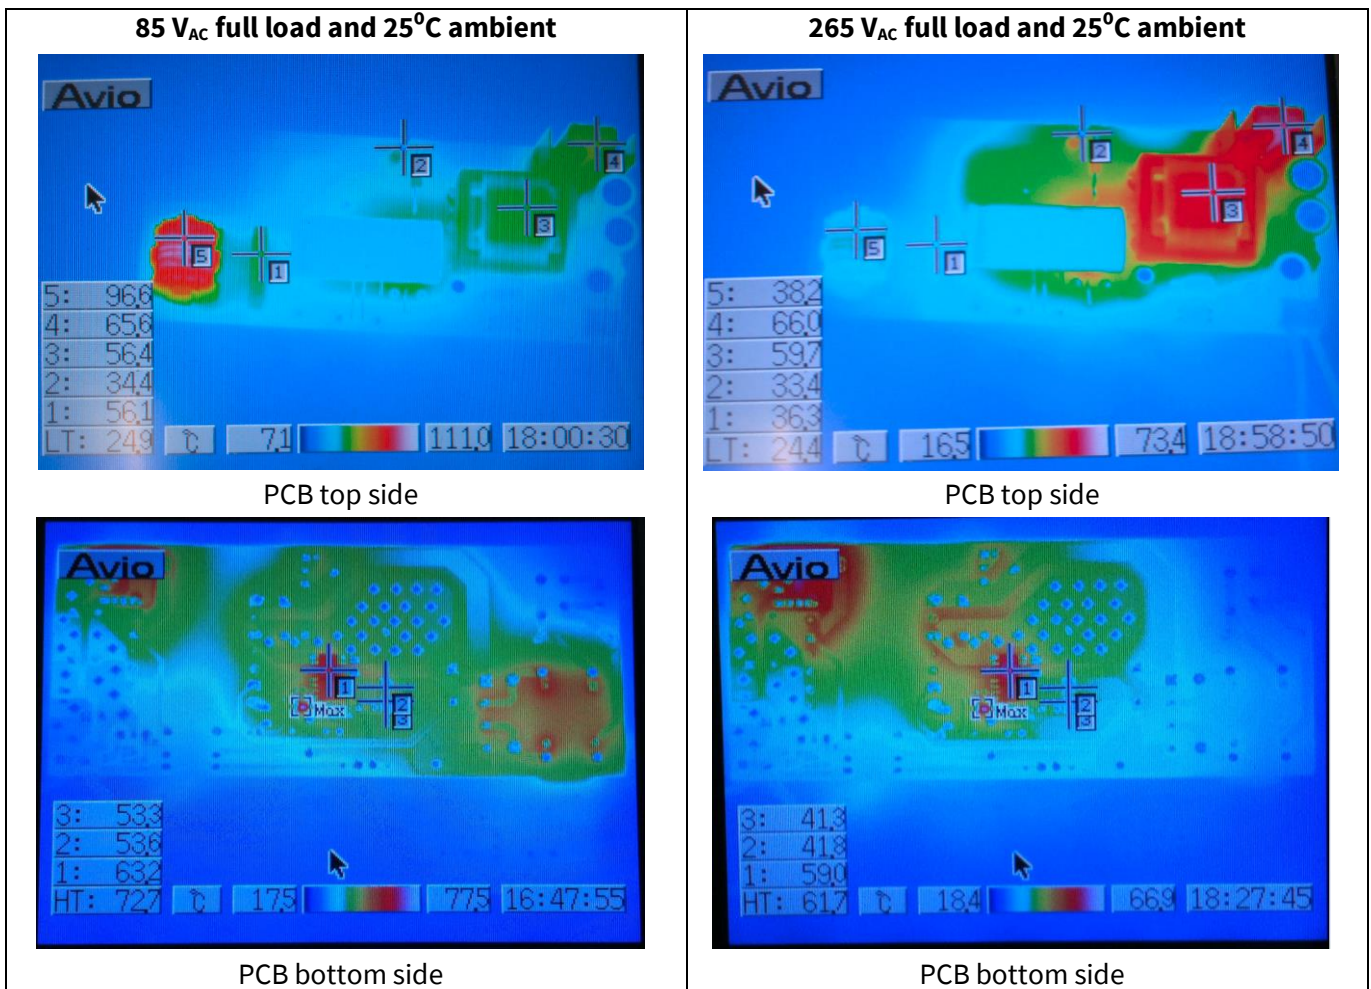

**Figure 17 Infrared thermal image of DEMO-3RBR0665JG**

Waveforms and scope plots

## 10 Waveforms and scope plots

All waveforms and scope plots were recorded with a TELEDYNELECROY 606Zi oscilloscope.

### 10.1 Startup at low/high AC line input voltage with maximum load

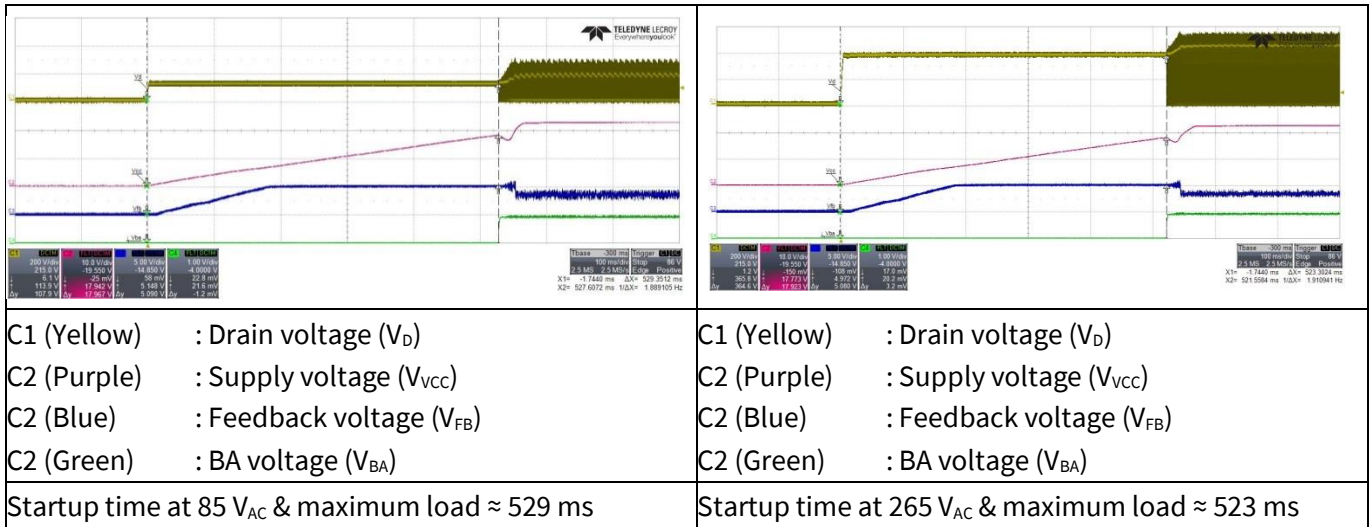


Figure 18 Startup

### 10.2 Soft start


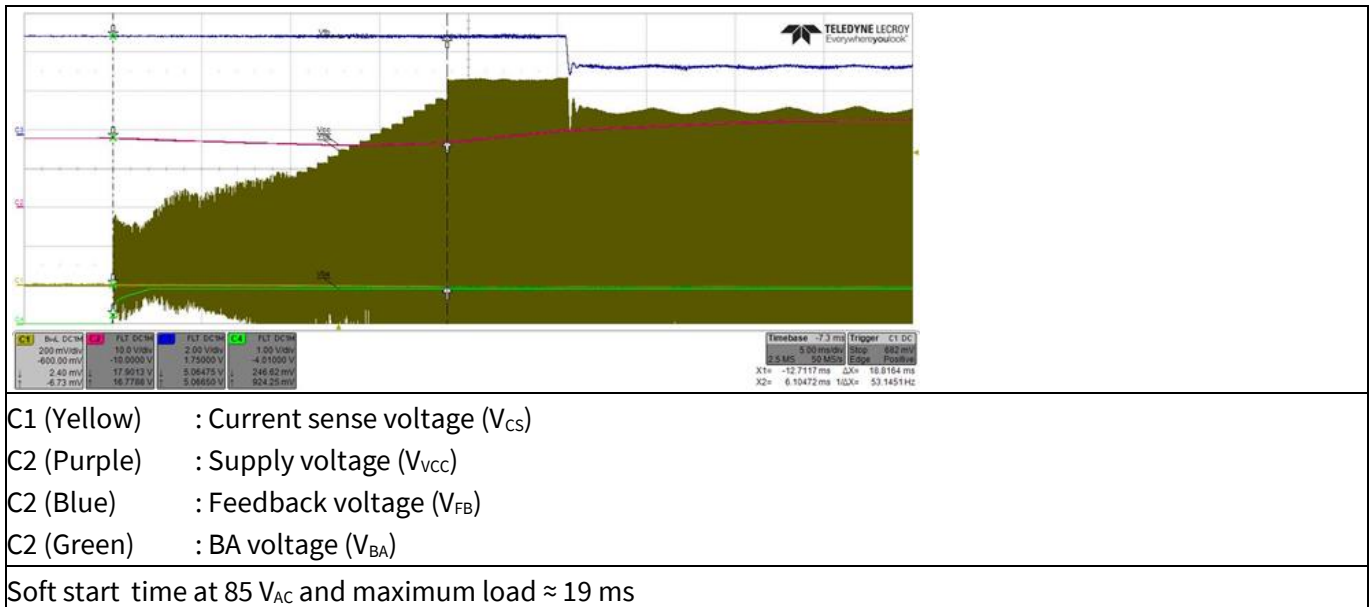


Figure 19 Soft start

Waveforms and scope plots

### 10.3 Frequency jittering

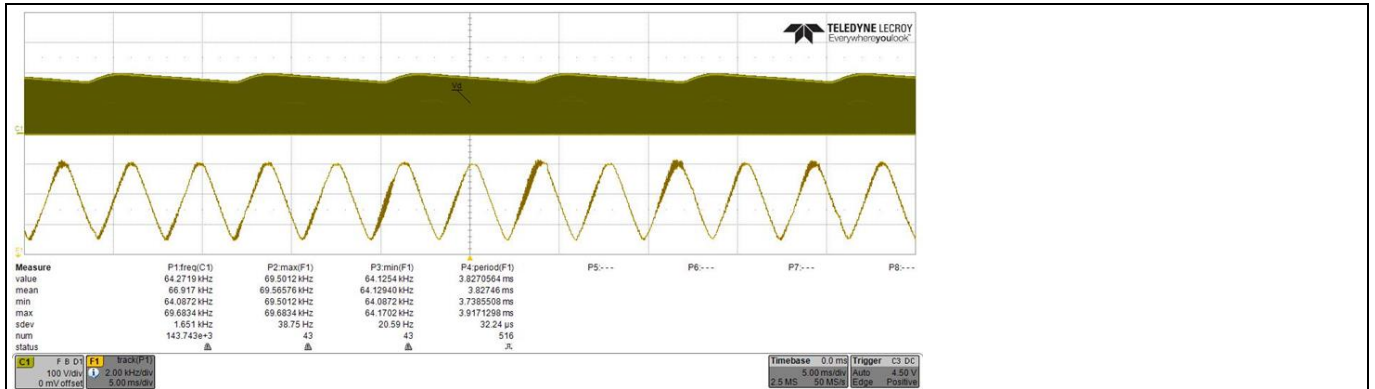


C1 (Yellow) : Drain voltage ( $V_{Drain}$ )  
F1 (Yellow) : Frequency track of C1

Frequency jittering at 85  $V_{AC}$  and maximum load  $\approx$  64 kHz ~ 69 kHz, Jitter period is  $\approx$  3.8 ms

Figure 20 Frequency jittering

### 10.4 Drain and current sense voltage at maximum load

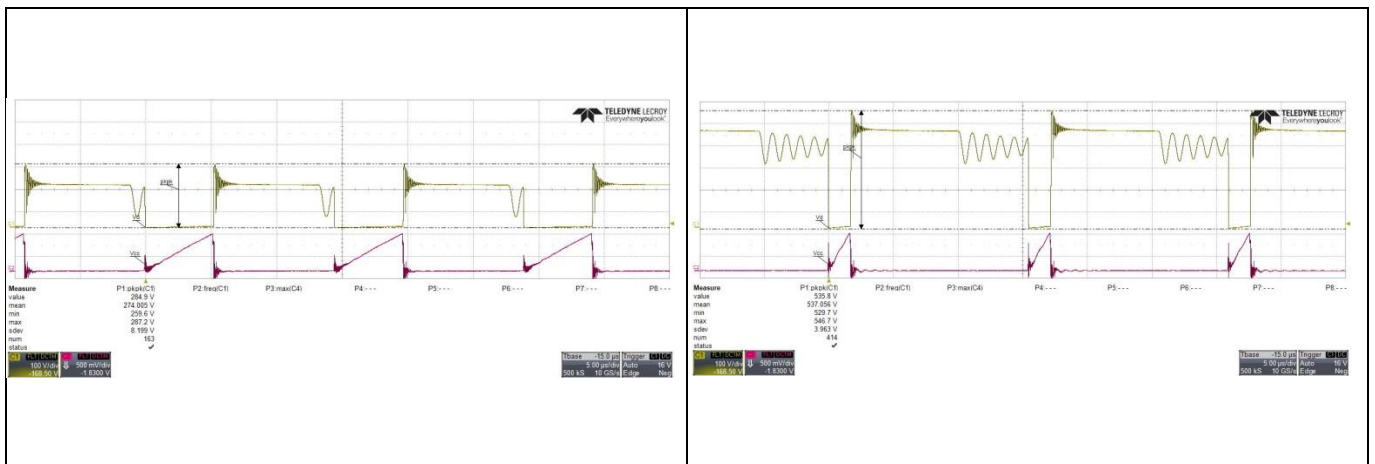

C1 (Yellow) : Drain voltage ( $V_{Drain}$ )

C2 (Purple) : Current sense voltage ( $V_{Cs}$ )

$V_{Drain\_peak}$  at 85  $V_{AC}$   $\approx$  287 V

C1 (Yellow) : Drain voltage ( $V_{Drain}$ )

C2 (Purple) : Current sense voltage ( $V_{Cs}$ )

$V_{Drain\_peak}$  at 265  $V_{AC}$   $\approx$  546 V

Figure 21 Drain and current sense voltage at maximum load

Waveforms and scope plots

10.5 Load transient response (Dynamic load from 10% to 100%)

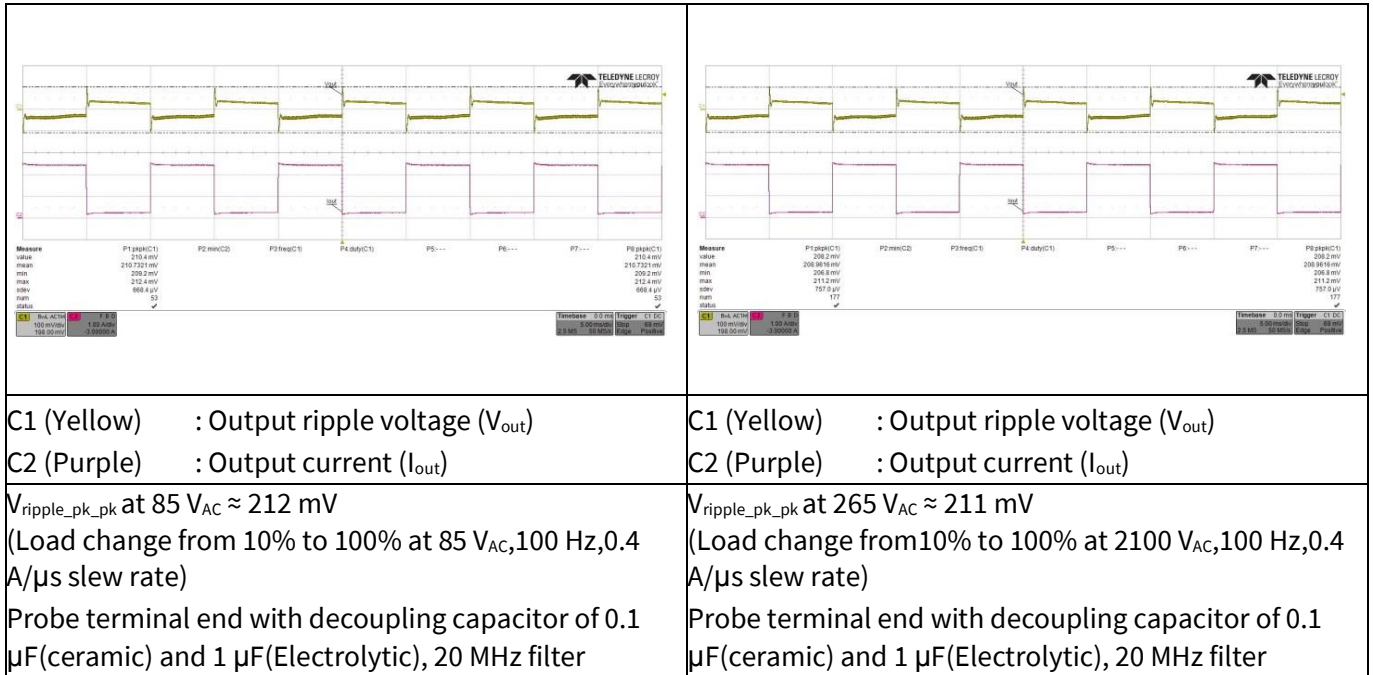


Figure 22 Load transient response

10.6 Output ripple voltage at maximum load

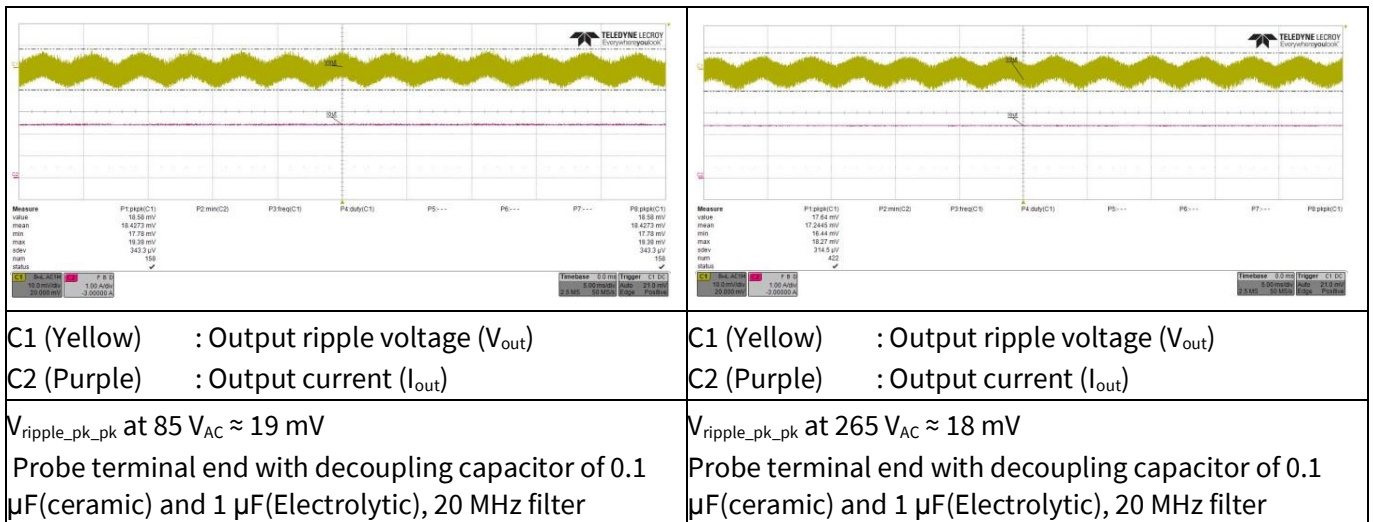


Figure 23 Output ripple voltage at maximum load

Waveforms and scope plots

10.7 Output ripple voltage at burst mode 1 W load

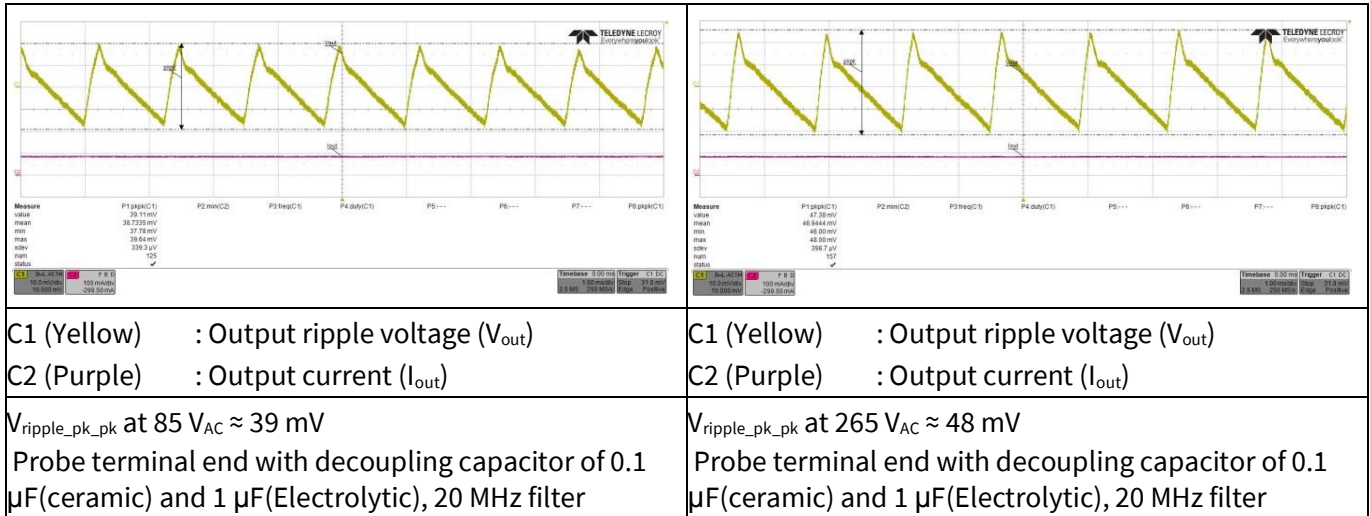


Figure 24 Output ripple voltage at burst mode 1 W load

10.8 Active burst mode


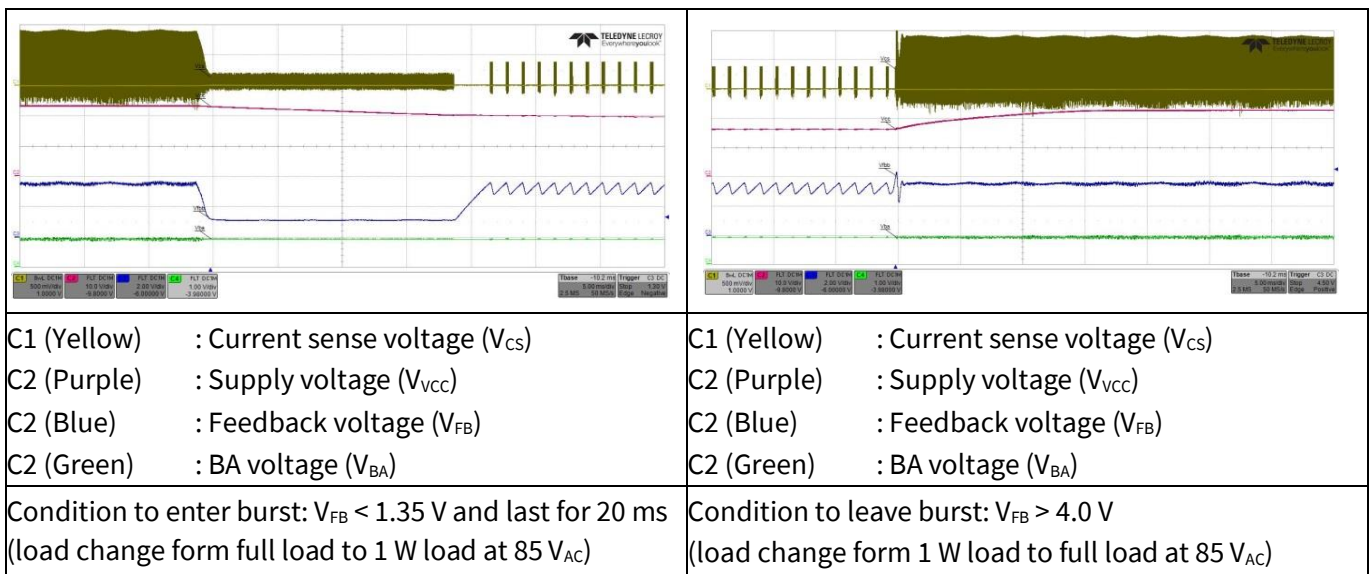


Figure 25 Active burst mode



Waveforms and scope plots

### 10.9 VCC over voltage protection

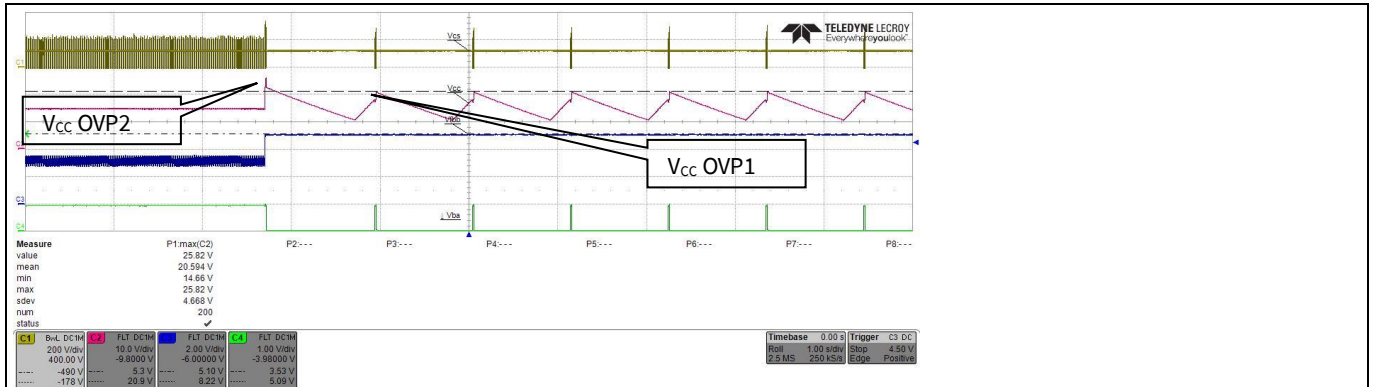


- C1 (Yellow) : Drain voltage ( $V_D$ )
- C2 (Purple) : Supply voltage ( $V_{CC}$ )
- C2 (Blue) : Feedback voltage ( $V_{FB}$ )
- C2 (Green) : BA voltage ( $V_{BA}$ )

Condition to enter VCC over voltage protection:  $V_{CC} > 25.5 V$   
 $V_{CC} > 20.5 V$  and  $V_{FB} > 4.0 V$  and during soft start  
 (Short the diode of optocoupler(Pin 1 and 2 of IC12) during system operating at no load and 85  $V_{AC}$ )

Figure 26 VCC overvoltage protection

### 10.10 Over load protection

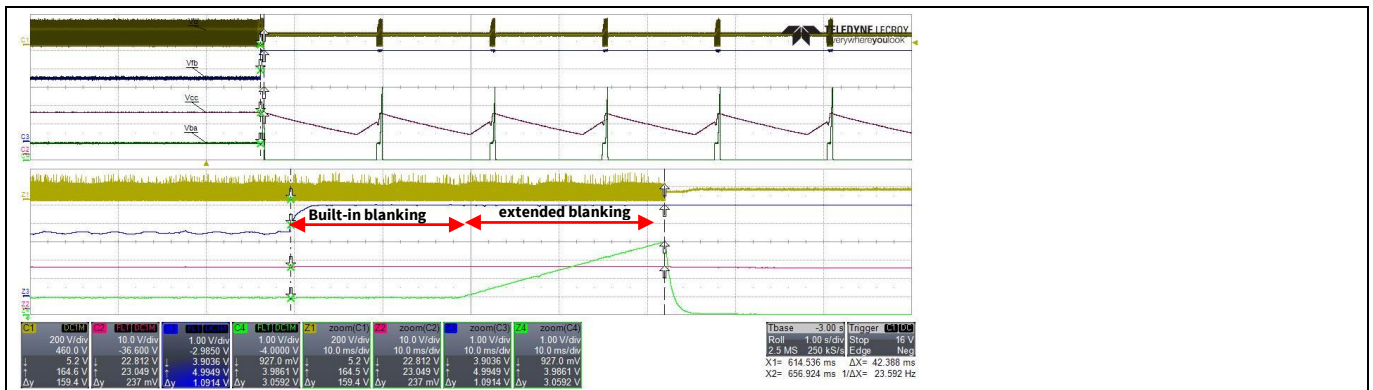


- C1 (Yellow) : Drain voltage ( $V_D$ )
- C2 (Purple) : Supply voltage ( $V_{CC}$ )
- C2 (Blue) : Feedback voltage ( $V_{FB}$ )
- C2 (Green) : BA voltage ( $V_{BA}$ )

Condition to enter over load protection:  $V_{FB} > 4.0 V$ , last for 20 ms and extended blanking time  
 (output load change from 2.5 A to 3.5 A at 85  $V_{AC}$ )

Figure 27 Over load protection

Waveforms and scope plots

10.11 VCC under voltage/Short optocoupler protection

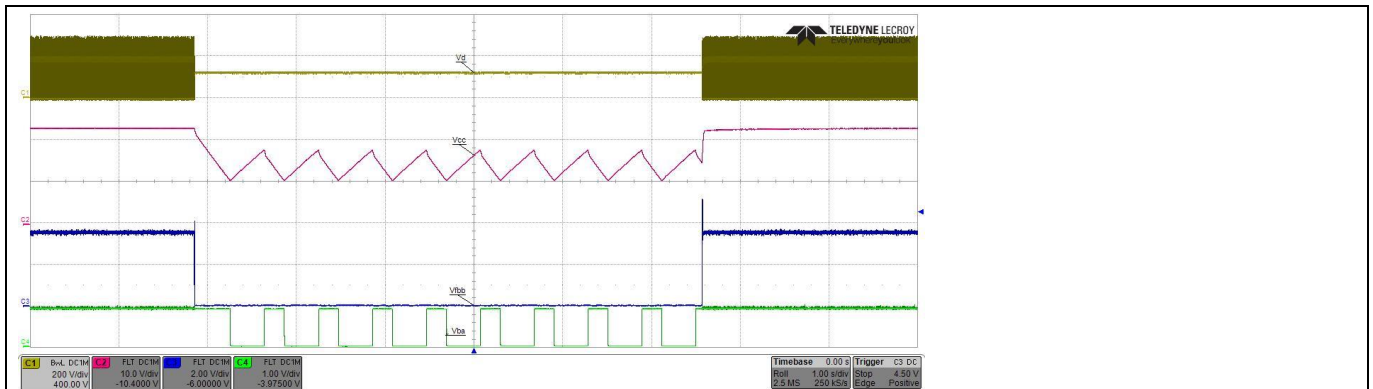


- C1 (Yellow) : Drain voltage ( $V_D$ )
- C2 (Purple) : Supply voltage ( $V_{VCC}$ )
- C2 (Blue) : Feedback voltage ( $V_{FB}$ )
- C2 (Green) : BA voltage ( $V_{BA}$ )

Condition to enter VCC under voltage protection:  $V_{CC} < 10.5\text{ V}$   
(short the transistor of optocoupler(Pin 3 and 4 of IC12) during system operating at full load and release at 85  $V_{AC}$ )

Figure 28 VCC under voltage/short optocoupler protection

10.12 External auto restart enable

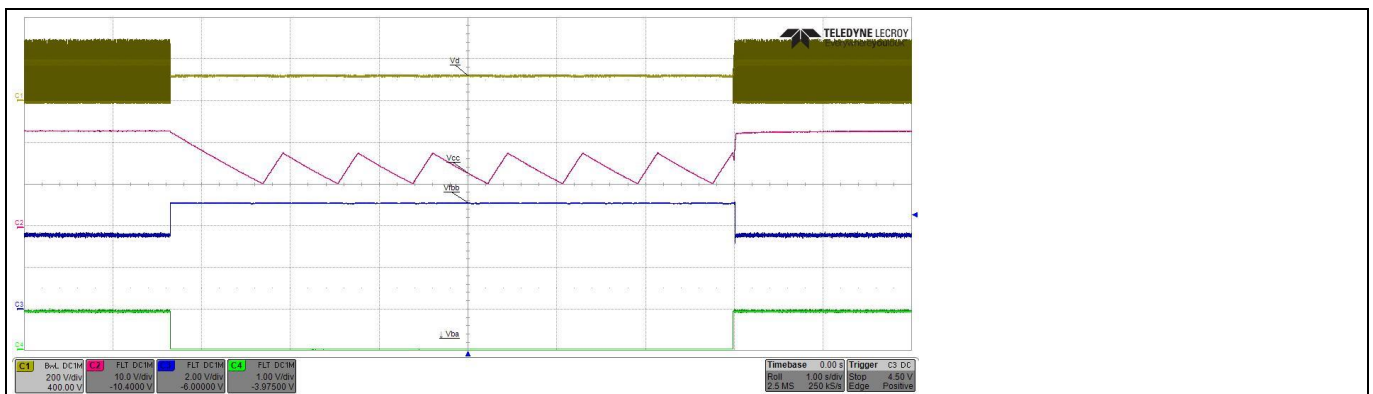

- C1 (Yellow) : Drain voltage ( $V_D$ )
- C2 (Purple) : Supply voltage ( $V_{VCC}$ )
- C2 (Blue) : Feedback voltage ( $V_{FBB}$ )
- C2 (Green) : BA voltage ( $V_{BA}$ )

Condition to enter external protection enable:  $V_{BA} < 0.33\text{ V}$   
(short BA pin to Gnd by 10 $\Omega$  resistor during system operating at full load and 85  $V_{AC}$ )

Figure 29 External auto restart enable

## References

# 11 References

- [1] [ICE3RBR0665JG datasheet, Infineon Technologies AG](#)
- [2] [AN-PS0025-CoolSET F3R DIP-8, DIP-7, DSO-16/12 new jitter version design guide-V2.2](#)

## Revision History

### Major changes since the last revision

| Page or Reference | Description of change |
|-------------------|-----------------------|
| --                | First release.        |
|                   |                       |
|                   |                       |

#### Trademarks of Infineon Technologies AG

AURIX™, C166™, CanPAK™, CIPOS™, CoolGaN™, CoolMOS™, CoolSET™, CoolSiC™, CORECONTROL™, CROSSAVE™, DAVE™, DI-POL™, DrBlade™, EasyPIM™, EconoBRIDGE™, EconoDUAL™, EconoPACK™, EconoPIM™, EiceDRIVER™, eupec™, FCOS™, HITFET™, HybridPACK™, Infineon™, ISOFACE™, IsoPACK™, i-Wafer™, MIPAQ™, ModSTACK™, my-d™, NovalithIC™, OmniTune™, OPTIGA™, OptiMOS™, ORIGA™, POWERCODE™, PRIMARION™, PrimePACK™, PrimeSTACK™, PROFET™, PRO-SiL™, RASIC™, REAL3™, ReverSave™, SatRIC™, SIEGET™, SIPMOS™, SmartLEWIS™, SOLID FLASH™, SPOC™, TEMPFET™, thinQ!™, TRENCHSTOP™, TriCore™.

Trademarks updated August 2015

#### Other Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

**Edition 2016-04-15**

**Published by**

**Infineon Technologies AG**

**81726 Munich, Germany**

**© 2016 Infineon Technologies AG.**

**All Rights Reserved.**

**Do you have a question about this document?**

**Email: [erratum@infineon.com](mailto:erratum@infineon.com)**

**Document reference**

**ANDEMO\_201510\_PL21\_004**

#### IMPORTANT NOTICE

The information contained in this application note is given as a hint for the implementation of the product only and shall in no event be regarded as a description or warranty of a certain functionality, condition or quality of the product. Before implementation of the product, the recipient of this application note must verify any function and other technical information given herein in the real application. Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind (including without limitation warranties of non-infringement of intellectual property rights of any third party) with respect to any and all information given in this application note.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office ([www.infineon.com](http://www.infineon.com)).

#### WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.