




Features:

- Conform to EN 60309-1 and -2 standards
- Body, insert and cover made of insulating, thermoplastic, self-extinguishing material
- PE...PV (IP44) types, RAL 7035 grey colour body, spring cover with operating voltage colour, entry with cable gland
- · Fixing captive screws
- IP44 degree of protection (EN 60529)

Specifications:

- Series Gender Current Rating Connector Mounting Contact Termination Connector Type No. of Outlets
- : PE32_pv : Receptacle
- : 32A
- : Cable
- : Screw
- : Stan
 - : Standard Power Entry

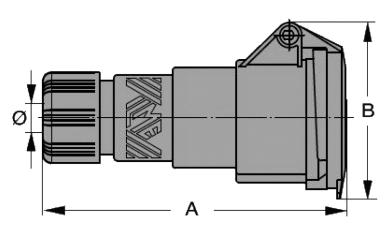

Poles	Frequency Hz	Voltage V
2P+⊕		200 ÷ 250
3P+⊕	50 and 60	380 ÷ 415
3P+N+⊕		200/346 ÷ 240/415

PEPV	Α	В	Ømin	Ømax
32A 2P+⊕		102		
3P+⊕	163	102	8	24
3P+N+⊕		105		

Dimensions: Millimetres

Part Number Table

Description	Part Number	
Coupler, 240V, 2P+E	PE3263PVB	
Coupler, 415V, 3P+E	PE3264PVB	
Coupler, 415V, 3P+E	PE3265PVB	

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-POWER is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com www.farnell.com www.newark.com www.cpc.co.uk

