



BNC Bulkhead Socket

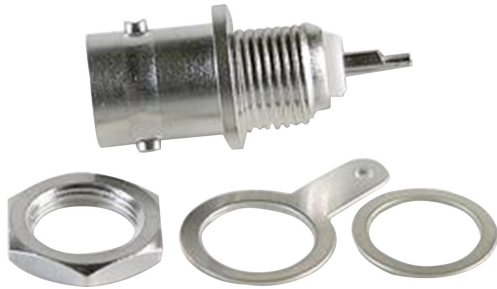

Specifications:

Connector Type	: BNC Coaxial
Body Style	: Straight Bulkhead Jack
Impedance	: 50Ω
Contact Material	: Brass
Contact Plating	: Silver
Frequency Max	: 11GHz
Connector Mounting	: Panel
Contact Resistance	: 1.5mΩ
DC Current Max	: 1A
Insulator Material	: PTFE
Mounting Type	: Bulkhead
Operating Temperature	: -65°C to +165°C
Panel Cutout Diameter	: 9.7mm
Panel Thickness	: 5mm
Proof Voltage	: 2kV
VSWR	: 1.35
Working Voltage	: 500V
Bodies	: Brass per JIS-C3604
Centre Contact	: Beryllium Copper per ASTM B196 UNS C17300
Insulation	: PTFE per ASTM D1457 and ASTM D1710


Connector interface per MIL-STD-348A
Part to be clean and free of burrs

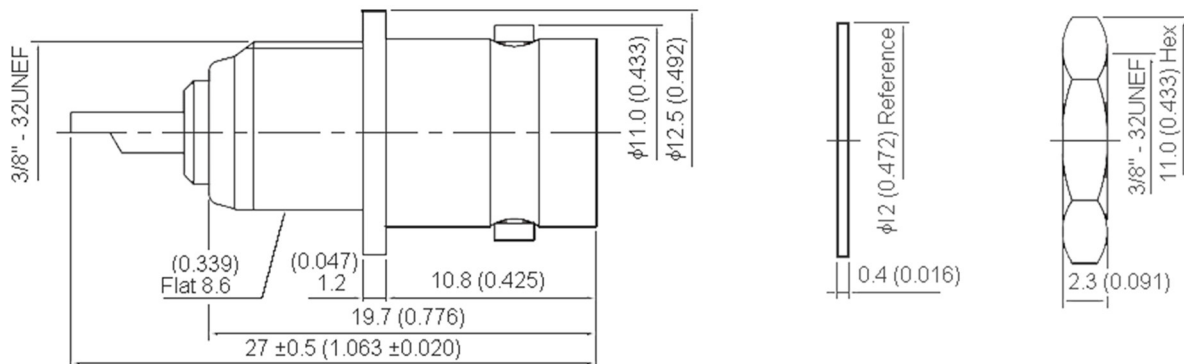

Dimensions : Millimetres (Inches)



BNC Bulkhead Socket

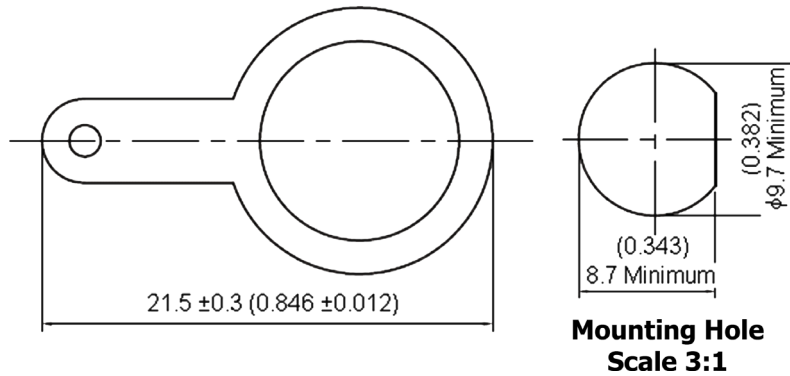

Dimensions : Millimetres (Inches)

Description	Material	Finish
Washer	Brass	Silver 70 μ " Min.
Nut		
Washer		
Insulation	PTFE	None
Centre Contact	Beryllium Copper	Silver 70 μ " Min.
Body	Brass	
Insulation	PTFE	None

Part Number Table

Description	Part Number
Socket, BNC, Bulkhead, 50R	13-25 TSS 50R

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com
www.farnell.com
www.newark.com

