

SKM 22GD123D



SEMITRANS® 6

IGBT modules


SKM 22GD123D

Features

- MOS input (voltage controlled)
- N channel, homogeneous Si
- Low inductance case
- Very low tail current with low temperature dependence
- High short circuit capability, self limiting to $6 \times I_{Cnom}$
- Latch-up free
- Fast & soft inverse CAL diodes
- Isolated copper baseplate using DCB Direct Copper Bonding Technology
- Large clearance (9 mm) and creepage distances (13 mm)

Typical Applications*

- Switched mode power supplies
- Three phase inverters for AC motor speed control
- General power switching applications
- Pulse frequencies also above 15 kHz



GD

| Absolute Maximum Ratings | | $T_c = 25^\circ\text{C}$, unless otherwise specified | | | | |
|--------------------------|--|---|-----|--|------------------|---|
| Symbol | Conditions | Values | | | Units | |
| IGBT | | | | | | |
| V_{CES} | $T_j = 25^\circ\text{C}$ | 1200 | | | V | |
| I_C | $T_j = 150^\circ\text{C}$ | $T_{case} = 25^\circ\text{C}$ | 25 | | A | |
| | | $T_{case} = 80^\circ\text{C}$ | 15 | | A | |
| I_{CRM} | $I_{CRM} = 2 \times I_{Cnom}$ | 50 | | | A | |
| V_{GES} | | ± 20 | | | V | |
| t_{psc} | $V_{CC} = 600\text{ V}; V_{GE} \leq 20\text{ V}; T_j = 125^\circ\text{C}$ $V_{CES} < 1200\text{ V}$ | 10 | | | μs | |
| Inverse Diode | | | | | | |
| I_F | $T_j = 150^\circ\text{C}$ | $T_{case} = 25^\circ\text{C}$ | 25 | | A | |
| | | $T_{case} = 80^\circ\text{C}$ | 15 | | A | |
| I_{FRM} | $I_{FRM} = 2 \times I_{Fnom}$ | 50 | | | A | |
| I_{FSM} | $t_p = 10\text{ ms}; \text{sin.}$ | $T_j = 150^\circ\text{C}$ | 200 | | | A |
| Module | | | | | | |
| $I_{t(RMS)}$ | | 100 | | | A | |
| T_{vj} | | - 40 ... + 175 | | | $^\circ\text{C}$ | |
| T_{stg} | | - 40...+ 125 | | | $^\circ\text{C}$ | |
| V_{isol} | AC, 1 min. | 2500 | | | V | |

| Characteristics | | $T_c = 25^\circ\text{C}$, unless otherwise specified | | | |
|-----------------|--|---|-------|--------|------------------|
| Symbol | Conditions | min. | typ. | max. | Units |
| IGBT | | | | | |
| $V_{GE(th)}$ | $V_{GE} = V_{CE}, I_C = 1\text{ mA}$ | 4,5 | 5,5 | 6,5 | V |
| I_{CES} | $V_{GE} = 0\text{ V}, V_{CE} = V_{CES}$ | | 0,3 | 0,9 | mA |
| V_{CE0} | | $T_j = 25^\circ\text{C}$ | 1,4 | 1,6 | V |
| | | $T_j = 125^\circ\text{C}$ | 1,6 | 1,8 | V |
| r_{CE} | $V_{GE} = 15\text{ V}$ | $T_j = 25^\circ\text{C}$ | 73,33 | 93,33 | $\text{m}\Omega$ |
| | | $T_j = 125^\circ\text{C}$ | 100 | 126,66 | $\text{m}\Omega$ |
| $V_{CE(sat)}$ | $I_{Cnom} = 15\text{ A}, V_{GE} = 15\text{ V}$ | $T_j = ^\circ\text{C}_{chiplev.}$ | 2,5 | 3 | V |
| C_{ies} | $V_{CE} = 25, V_{GE} = 0\text{ V}$ | $f = 1\text{ MHz}$ | 1 | | nF |
| C_{oes} | | | 0,15 | | nF |
| C_{res} | | | 0,07 | | nF |
| $t_{d(on)}$ | $R_{Gon} = 52\ \Omega$ | $V_{CC} = 600\text{ V}$ $I_C = 25\text{ A}$ | 40 | | ns |
| t_r | | | 35 | | ns |
| E_{on} | $R_{Goff} = 52\ \Omega$ | $T_j = 125^\circ\text{C}$ $V_{GE} = -15\text{ V}$ | 2 | | mJ |
| $t_{d(off)}$ | | | 350 | | ns |
| t_f | | | 70 | | ns |
| E_{off} | | | 1,4 | | mJ |
| $R_{th(j-c)}$ | per IGBT | | 0,86 | | K/W |



SEMITRANS® 6

IGBT modules


SKM 22GD123D

Features

- MOS input (voltage controlled)
- N channel, homogeneous Si
- Low inductance case
- Very low tail current with low temperature dependence
- High short circuit capability, self limiting to $6 \times I_{cnom}$
- Latch-up free
- Fast & soft inverse CAL diodes
- Isolated copper baseplate using DCB Direct Copper Bonding Technology
- Large clearance (9 mm) and creepage distances (13 mm)

Typical Applications*

- Switched mode power supplies
- Three phase inverters for AC motor speed control
- General power switching applications
- Pulse frequencies also above 15 kHz

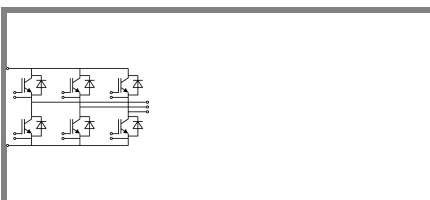

GD

| Characteristics | | min. | typ. | max. | Units |
|----------------------|---|------|------|------|-------|
| Inverse Diode | | | | | |
| $V_F = V_{EC}$ | $I_{Fnom} = 15 \text{ A}; V_{GE} = 0 \text{ V}$ | | 2 | 2,5 | V |
| | | | 1,8 | | V |
| V_{F0} | | | 1,1 | 1,2 | V |
| | | | | | V |
| r_F | | | 60 | 87 | mΩ |
| | | | | | mΩ |
| I_{RRM} | $I_F = 15 \text{ A}$ | | 16 | | A |
| Q_{rr} | | | 2,7 | | μC |
| E_{rr} | $V_{GE} = 0 \text{ V}; V_{CC} = 600 \text{ V}$ | | 0,95 | | mJ |
| $R_{th(j-c)D}$ | per diode | | | 1,5 | K/W |
| Module | | | | | |
| L_{CE} | | | | 60 | nH |
| $R_{th(c-s)}$ | per module | | | 0,05 | K/W |
| M_s | to heat sink M5 | 4 | | 5 | Nm |
| w | | | | 175 | g |

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.

SKM 22GD123D



SEMITRANS® 6

IGBT modules


SKM 22GD123D

Features

- MOS input (voltage controlled)
- N channel, homogeneous Si
- Low inductance case
- Very low tail current with low temperature dependence
- High short circuit capability, self limiting to $6 \times I_{cnom}$
- Latch-up free
- Fast & soft inverse CAL diodes
- Isolated copper baseplate using DCB Direct Copper Bonding Technology
- Large clearance (9 mm) and creepage distances (13 mm)







Typical Applications*







- Switched mode power supplies
- Three phase inverters for AC motor speed control
- General power switching applications
- Pulse frequencies also above 15 kHz



GD

| Z_{th} | | Conditions | Values | Units |
|------------------|---------|------------|--------|-------|
| Symbol | | | | |
| $Z_{th(j-c)I}$ | | | | |
| $R_{\theta j-c}$ | $i = 1$ | | 560 | mk/W |
| $R_{\theta j-c}$ | $i = 2$ | | 220 | mk/W |
| $R_{\theta j-c}$ | $i = 3$ | | 67 | mk/W |
| $R_{\theta j-c}$ | $i = 4$ | | 13 | mk/W |
| $\tau_{th(j-c)}$ | $i = 1$ | | 0,056 | s |
| $\tau_{th(j-c)}$ | $i = 2$ | | 0,0078 | s |
| $\tau_{th(j-c)}$ | $i = 3$ | | 0,017 | s |
| $\tau_{th(j-c)}$ | $i = 4$ | | 0,0001 | s |
| $Z_{th(j-c)D}$ | | | | |
| $R_{\theta j-c}$ | $i = 1$ | | 800 | mk/W |
| $R_{\theta j-c}$ | $i = 2$ | | 400 | mk/W |
| $R_{\theta j-c}$ | $i = 3$ | | 270 | mk/W |
| $R_{\theta j-c}$ | $i = 4$ | | 30 | mk/W |
| $\tau_{th(j-c)}$ | $i = 1$ | | 0,0761 | s |
| $\tau_{th(j-c)}$ | $i = 2$ | | 0,0013 | s |
| $\tau_{th(j-c)}$ | $i = 3$ | | 0,011 | s |
| $\tau_{th(j-c)}$ | $i = 4$ | | 0,002 | s |

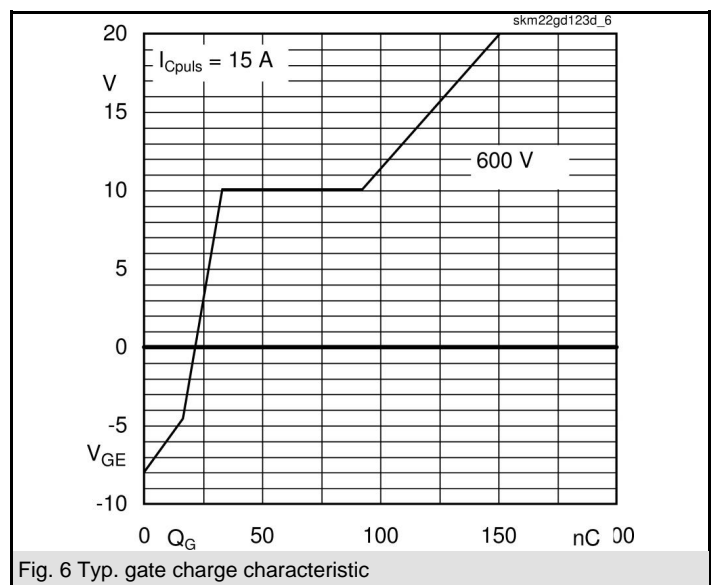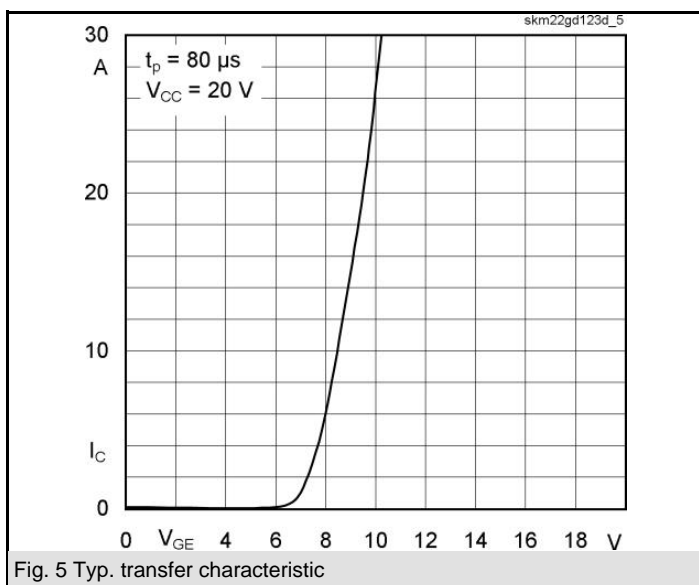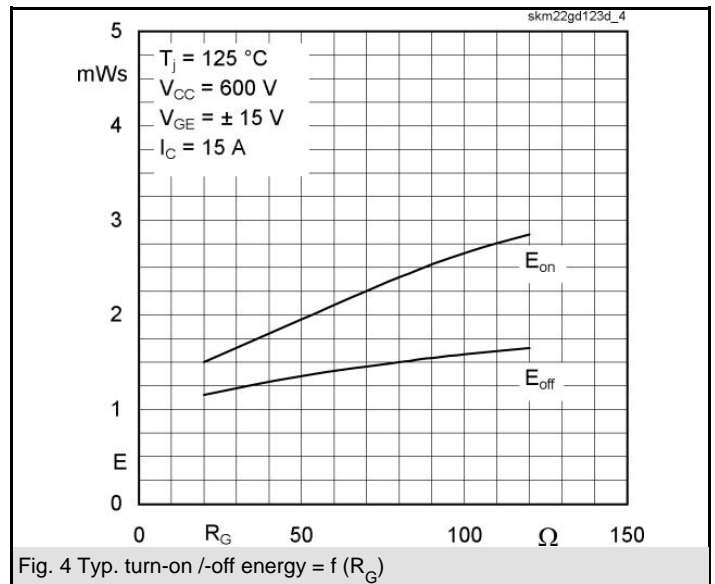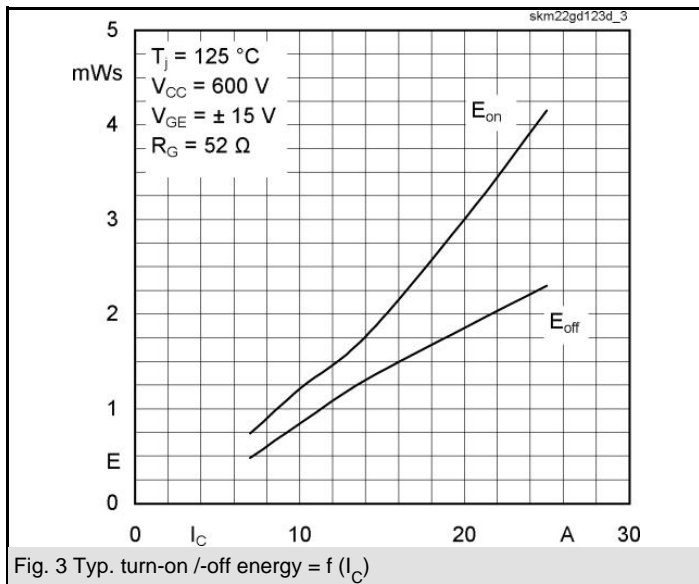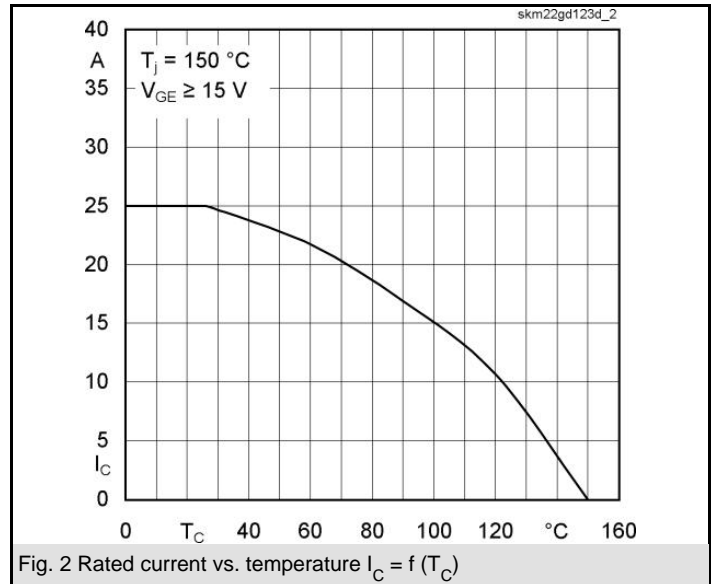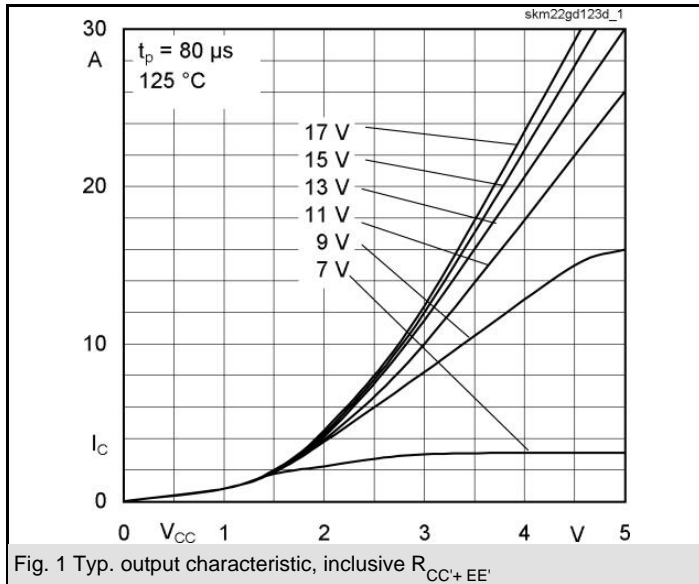

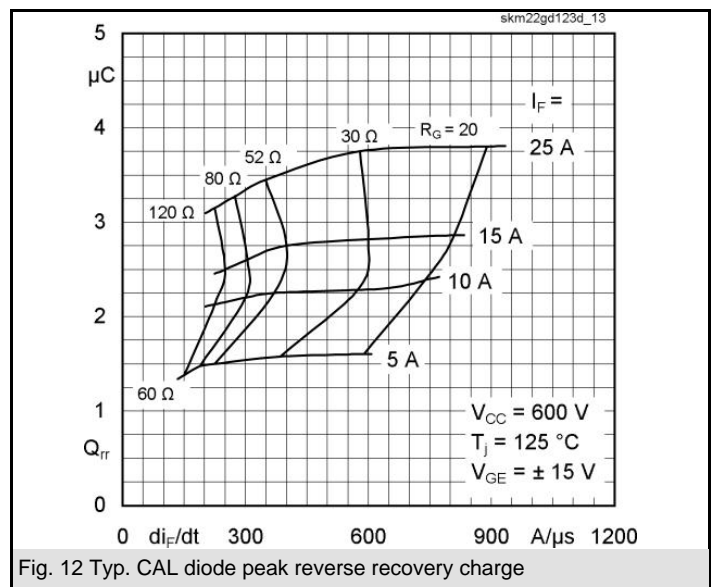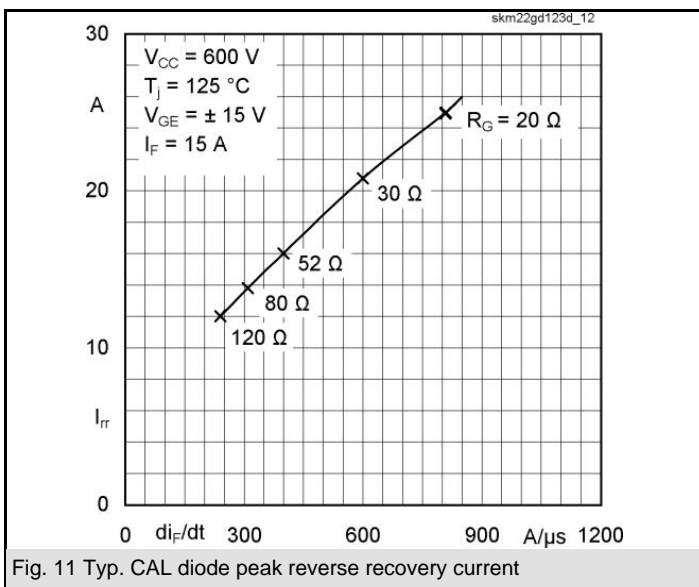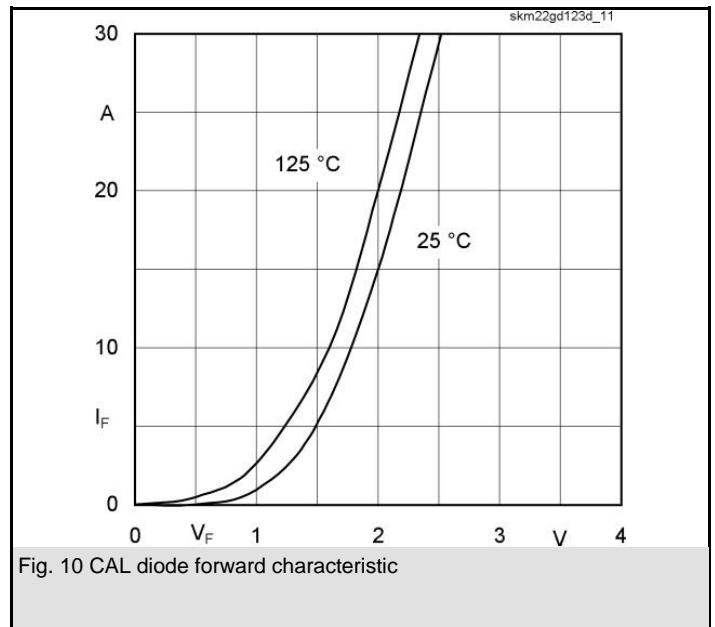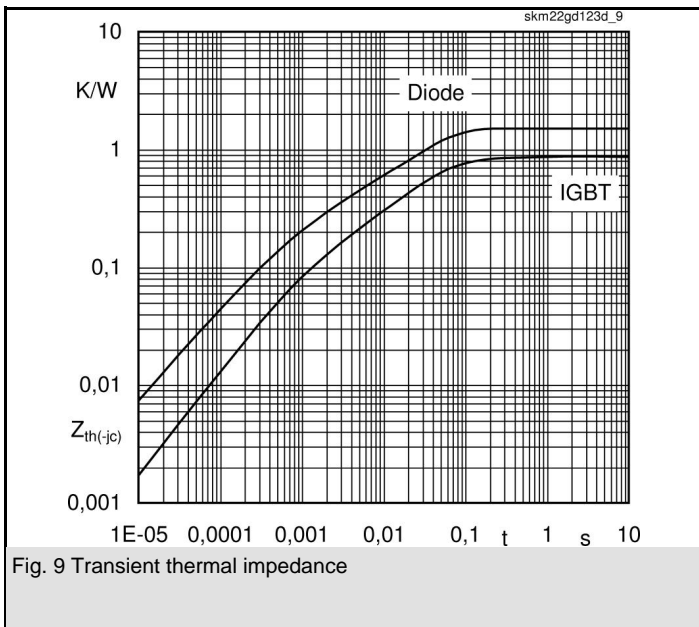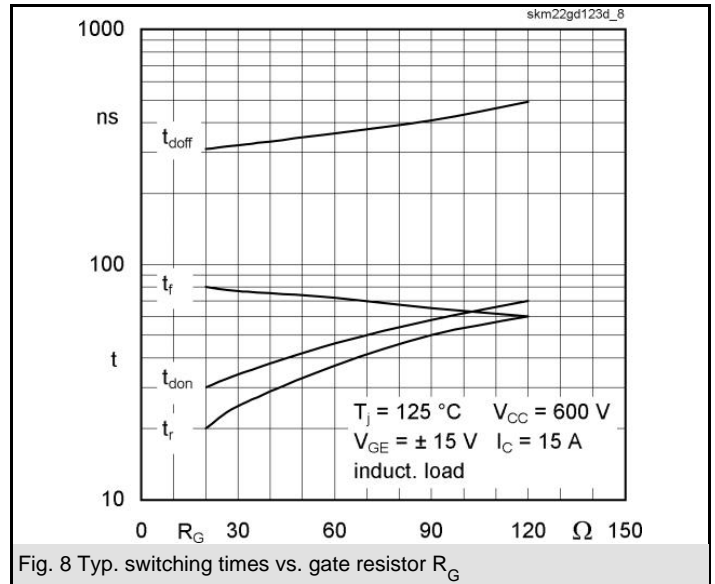
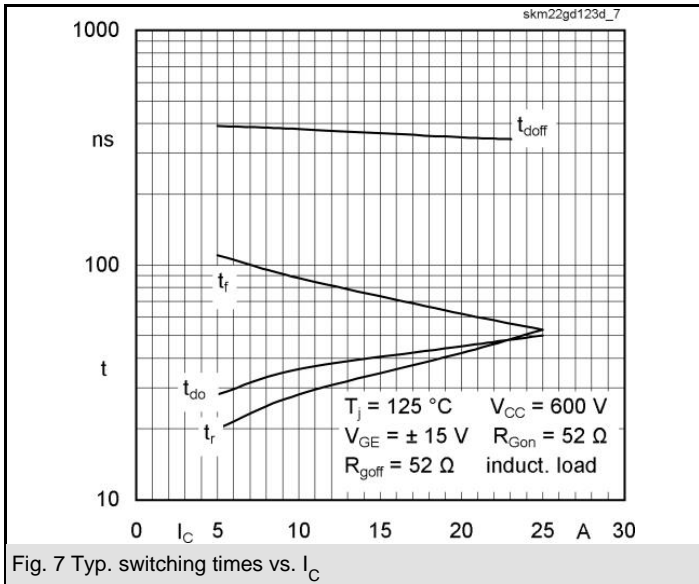


SKM 22GD123D


UL Recognized

CASED67

File 63 532

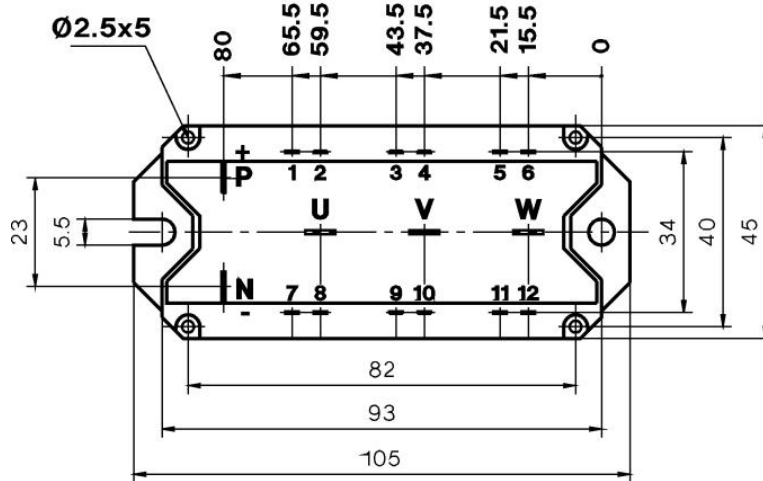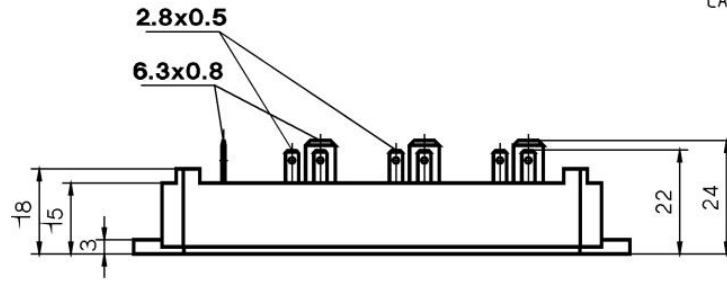

Case D 67

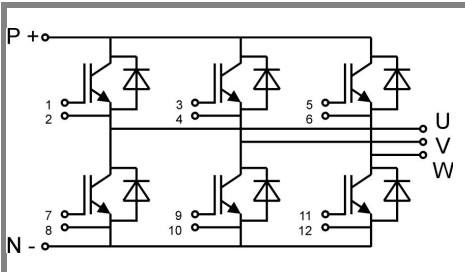

GD

Case D 67