

LED.PowerSpot 4W LED

4W GU10 PAR16 Lamp



Product Overview

A range of LED reflector lamps that provide maximum energy savings and which are replacements for common halogen lamps for accent and general lighting applications in hospitality, commercial and domestic settings.

Features

- Save energy up to 85% compared with halogen lamp.
- Direct replacement of GU10 halogen lamp.
- High lumen output.
- Long life of 30,000h.
- Instant start.
- Negligible UV output.
- Mercury free.

Safety and Maintenance

- Switch off supply before installing or removing lamp. Allow to cool before handling.
- Do not use in totally enclosed fittings as this will reduce lamp life.
- Do not dispose of in household waste.
- Dispose of in appropriate section of local civic amenity site or recycling centre.

Specifications

Product Code	KLED04PWR/GU10-S30	KLED04PWR/GU10-S40	KLED04PWR/GU10-S65
Lamp Cap	GU10	GU10	GU10
Lamp Shape	PAR16	PAR16	PAR16
Nominal Power (W)	4	4	4
Voltage	220-240Vac 50-60Hz	220-240Vac 50-60Hz	220-240Vac 50-60Hz
Current (mA)	33	33	33
Nominal Useful Luminous Flux (lm)	170	180	190
Total Luminous Flux (lm)	220	230	240
CCT (K)	3000K Warm White	4000K Cool White	6500K Day Light
Nominal Lifetime (h)	30000	30000	30000
Beam Angle (°)	36	36	36
Dimmable	No	No	No
Switching Cycles	50000	50000	50000
Warm-up time to 60% (S)	Instant full light	Instant full light	Instant full light
Suitable for Accent Lighting	Yes	Yes	Yes
Length (mm)	52.5	52.5	52.5
Diameter (mm)	50	50	50
Mercury (mg)	0	0	0
Clean-up instructions	N/A	N/A	N/A
Retrofit	Yes	Yes	Yes
Equivalent Wattage (W)	28	30	31
Rated Power (W)	4.0	4.0	4.0
Rated Useful Luminous Flux (lm)	170	180	190
Rated Lifetime (h)	30000	30000	30000
Power Factor	0.53	0.53	0.53
Rated Peak Candelas (cd)	270	280	320
Lumen Maintenance Factor at Nominal Lifetime	0.75	0.75	0.75
SDCM of CCT	<6	<6	<6
CRI	82	82	82
Start Time (s)	0.41	0.41	0.41
Ambient Temperature Range (°C)	-20 to 40	-20 to 40	-20 to 40

Notes: The Useful Luminous Flux quoted is for the output within a 90° cone as per the EU implementing directive on ecodesign requirements for directional lamps.


Energy Label

Manufacturer	Kosnic	Kosnic	Kosnic
Product Code	KLED04PWR/GU10-S30	KLED04PWR/GU10-S40	KLED04PWR/GU10-S65
Energy Class	A	A	A
Energy Consumption (kWh/1000h)	4.0	4.0	4.0


Product Markings

Manufacturer	Kosnic	Kosnic	Kosnic
Product Code	KLED04PWR/GU10-S30	KLED04PWR/GU10-S40	KLED04PWR/GU10-S65
Volts (V)	220-240Vac 50-60Hz	220-240Vac 50-60Hz	220-240Vac 50-60Hz
Nominal Watts (W)	4	4	4
Current (mA)	33	33	33
Nominal Useful Luminous Flux (lm)	170	180	190
CCT (K)	3000	4000	6500
Beam Angle (°)	36	36	36
CE Mark	Yes	Yes	Yes
WEEE Mark	Yes	Yes	Yes
Batch Code	Yes	Yes	Yes


Dimensions

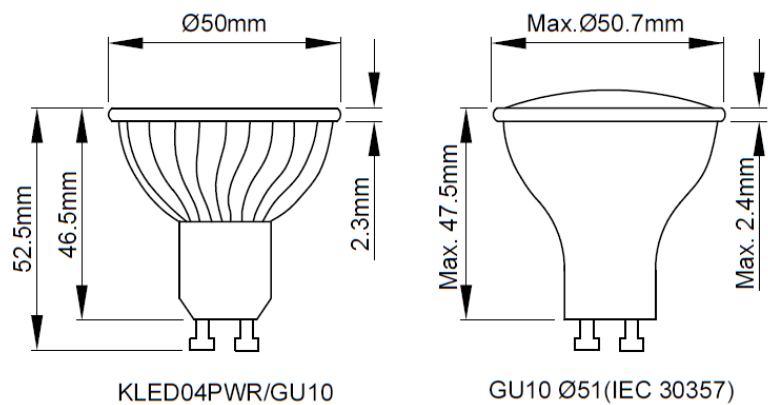

3000K

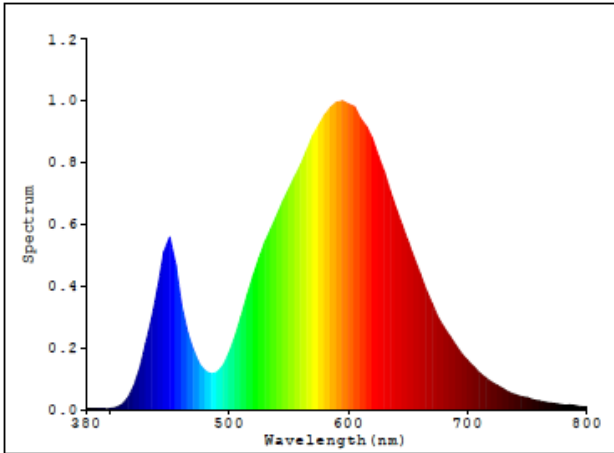

4000K

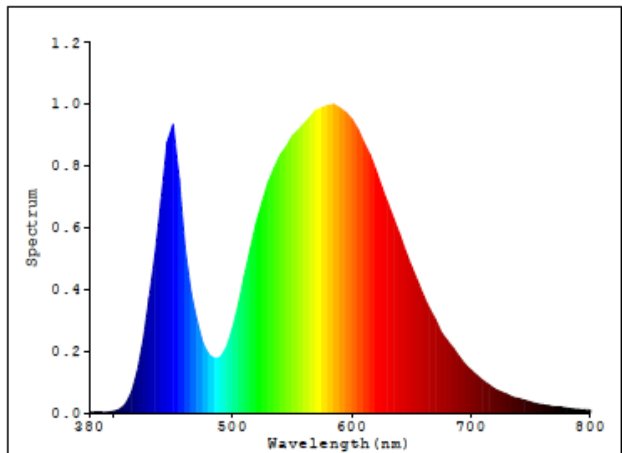

6500K

