

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1053131206](#)
Status: **Active**
Overview: [Nano-Fit™ Power Connectors](#)
Description: Nano-Fit™ Right Angle Header, Through Hole, 2.50mm Pitch, Single Row, 6 Circuits, 0.38µm Gold (Au) Plating, Black

Documents:

[3D Model](#) [Packaging Specification PK-105309-400 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980
 UL E29179

General

Product Family PCB Headers
 Series [105313](#)
 Application Power, Wire-to-Board
 Overview [Nano-Fit™ Power Connectors](#)
 Product Name Nano-Fit™
 UPC 887191929019

Physical

Breakaway No
 Circuits (Loaded) 6
 Circuits (maximum) 6
 Color - Resin Black
 Durability (mating cycles max) 50
 Flammability 94V-0
 Glow-Wire Compliant No
 Guide to Mating Part No
 Keying to Mating Part Yes
 Lock to Mating Part Yes
 Material - Metal Brass
 Material - Plating Mating Gold over Nickel
 Material - Plating Termination Tin over Nickel
 Material - Resin Liquid Crystal Polymer
 Net Weight 0.730/g
 Number of Rows 1
 Orientation Right Angle
 PC Tail Length 3.20mm
 PCB Locator Yes
 PCB Retention Yes
 PCB Thickness - Recommended 1.60mm, 2.40mm
 Packaging Type Tray
 Pitch - Mating Interface 2.50mm
 Pitch - Termination Interface 2.50mm
 Plating min - Mating 0.381µm
 Plating min - Termination 1.524µm
 Polarized to Mating Part Yes
 Polarized to PCB Yes
 Shrouded Yes
 Stackable No
 Surface Mount Compatible (SMC) No
 Temperature Range - Operating -40°C to +115°C
 Termination Interface: Style Through Hole

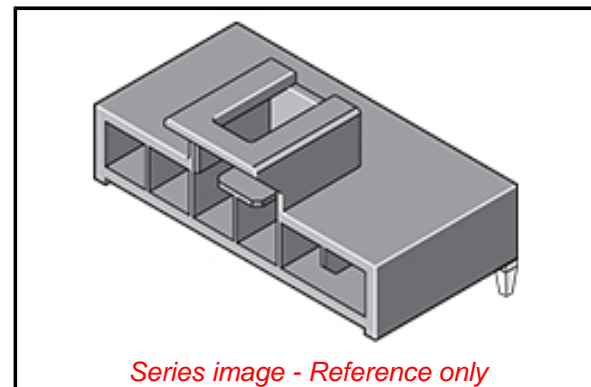

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per
 -ED/79/2015 (17
 December 2015)

Halogen-Free

Status

Low-Halogen

**Need more information on product
 environmental compliance?**

Email productcompliance@molex.com
 Please visit the [Contact Us](#) section for any
 non-product compliance questions.

China ROHS

ELV

Green Image

Not Relevant

Search Parts in this Series

[105313](#) Series

Mates With

Nano-Fit™ Receptacle Housing [105307](#)

Electrical

Current - Maximum per Contact

6.5A

Voltage - Maximum

300V

Material Info**Reference - Drawing Numbers**

Packaging Specification

PK-105309-400

Sales Drawing

SD-105313-100

This document was generated on 05/31/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION