LED Housing



RoHS Compliant



Specifications:


Dielectric Strength	: 13 kV/mm
Volume Resistivity (10 ^x Ω-cm)	: 14
High Volt, Low Current Arc Resis. (D495)	: 6
Chassis Thickness	: 6.5mm
Colour	: Black

Material:

101(r9)(f1), 101F(r9)(f1), 101L(r9)(f1), E101(r9)(f1), E101L(r9)(f1) Polyamide 66 (PA66), "Zytel", furnished as pellets

Colour	Min. Thk. (mm)	Flame Class	нш	HAI	RTI Elec.	RTI Imp.	RTI Str.
All	0.71	V-2	4	0	130	75	85
	1.5	V-2	3	0	130	75	85
	3	V-2	2	0	130	75	85
	6	V-2	2	0	130	75	85

Diagram:

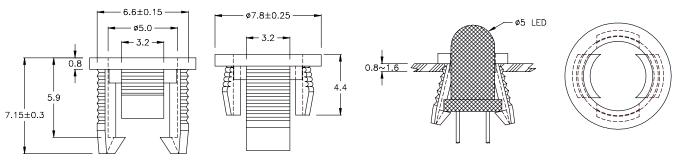

Dimensions : Millimetres

Note:

Suitable for outdoor use with respect to exposure to ultraviolet light, water Exposure and Immersion in accordance with UL746C.

Part Number Table

Description	Part Number
LED Housing	CLED-1

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage raising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com www.farnell.com www.newark.com

