

HOLDER FOR 3 MODULES, PLASTIC, 1NC, LED MODULE, RED, 6-24V AC/DC, SCREW TERMINAL

Figure similar

| | |
|--|------------------------------------|
| product brand name | SIRIUS ACT |
| Product designation | Commanding and signaling devices |
| Design of the product | Holder |
| Manufacturer article number | |
| <ul style="list-style-type: none"> • of supplied contact module | 3SU1400-1AA10-1CA0 |
| <ul style="list-style-type: none"> • of supplied LED module | 3SU1401-1BG20-1AA0 |
| <ul style="list-style-type: none"> • of the supplied holder | 3SU1500-0AA10-0AA0 |
| Actuator: | |
| Design of the operating mechanism | 3-way with module |
| Number of contact modules | 1 |
| Holder: | |
| Material of the holder | Plastic |
| Display: | |
| Number of LED modules | 1 |
| General technical data: | |
| Product function | |
| <ul style="list-style-type: none"> • positive opening | Yes |
| Product component | |
| <ul style="list-style-type: none"> • diode | Yes |
| <ul style="list-style-type: none"> • lamp transformer | No |
| <ul style="list-style-type: none"> • Light source | Yes |
| <ul style="list-style-type: none"> • series resistor | No |
| Insulation voltage | |
| <ul style="list-style-type: none"> • Rated value | 320 V |

| | |
|---|---|
| Degree of pollution | 3 |
| Shock resistance • acc. to IEC 60068-2-27 | Sinusoidal half-wave 50 g / 11 ms |
| Vibration resistance • acc. to IEC 60068-2-6 | 10 ... 500 Hz: 5g |
| Surge voltage resistance Rated value | 4 kV |
| Operating frequency maximum | 3 600 1/h |
| Mechanical service life (switching cycles) • typical | 10 |
| Thermal current | 10 A |
| Protection class IP • of the terminal | IP20 |
| Equipment marking • acc. to DIN EN 61346-2 • acc. to DIN EN 81346-2 | U U |
| Design of the fuse link for short-circuit protection of the auxiliary switch with type of assignment 1 required | gG / Dz 10 A, quick-acting / Dz 10 A |
| Continuous current of the C characteristic MCB | 10 A |
| Operating voltage • with AC — at 50 Hz Rated value — at 60 Hz Rated value • for DC Rated value — maximum — minimum | 6 ... 24 V 6 ... 24 V 24 V 6 V |

Power Electronics:

| | |
|----------------------------|--|
| Contact reliability | One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) |
|----------------------------|--|

Auxiliary circuit:

| | |
|---|--------------|
| Number of NC contacts • for auxiliary contacts | 1 |
| Number of NO contacts • for auxiliary contacts | 0 |
| Number of CO contacts • for auxiliary contacts | 0 |
| Design of the contact of the auxiliary contacts | Silver alloy |
| Operating current at AC-15 • at 230 V Rated value | 6 A |

Connections/ Terminals:

| | |
|--|---------------------|
| Type of electrical connection • of modules and accessories | Screw-type terminal |
|--|---------------------|

| | |
|--|--|
| Type of connectable conductor cross-section | |
| <ul style="list-style-type: none"> • solid with core end processing • solid without core end processing • finely stranded with core end processing • finely stranded without core end processing • for AWG conductors | <p>2x (0.5 ... 0.75 mm²)</p> <p>2x (1.0 ... 1.5 mm²)</p> <p>2x (0.5 ... 1.5 mm²)</p> <p>2x (1,0 ... 1,5 mm²)</p> <p>2x (18 ... 14)</p> |
| Tightening torque | |
| <ul style="list-style-type: none"> • with screw-type terminals | 0.8 ... 0.9 N·m |

| | |
|----------------------------------|-----|
| Lamp: | |
| Type of light source | LED |
| Color of the light source | red |

| | |
|--|---|
| Ambient conditions: | |
| Ambient temperature | |
| <ul style="list-style-type: none"> • during operation • during storage | <p>-25 ... +70 °C</p> <p>-40 ... +80 °C</p> |

| | |
|--|----------------------|
| Installation/ mounting/ dimensions: | |
| Mounting type | |
| <ul style="list-style-type: none"> • of modules and accessories | Front plate mounting |
| Height | 40 mm |
| Width | 30 mm |
| Shape of the installation opening | round |

Certificates/ approvals:

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU15011AG201CA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3SU15011AG201CA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU15011AG201CA0&lang=en

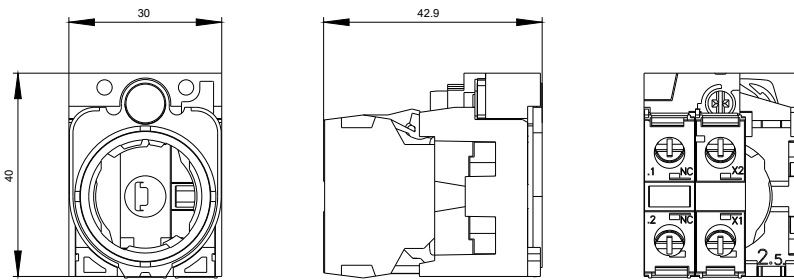

-P
6-24 V AC/DC

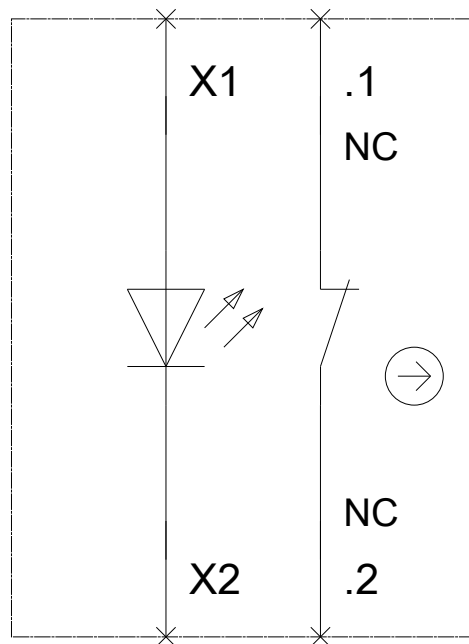

last modified:

27.04.2015