



## Description

This is an industrial 2 channel relay with SCR output, widely used in industry applications. The relay can be used for resistive, inductive or capacitive load. The load voltage is 24-530V AC, output current is rated at 25A. The load voltage is 240 Volts.

## Features

- Zero crossing switch
- Load current: 40A @24-530V AC
- SCR output
- DC input
- Opto-isolation:  $\geq 4000VACrms$
- Screw terminal (IP20)

## Applications

Suitable for high-low temperature chamber, plastics machinery, incubation machine, oiling machine, HVAC, elevator lighting, fountain controller.

## Technical Specification

### Input Circuit

Control Voltage Range	: 4V DC to 15V DC
Min. Turn-On Voltage	: 4V DC
Min. Turn-Off Voltage	: 1V DC
Max. Input Current	: 50mA

### Output Circuit

Load Voltage Range	: 24 ~ 280V AC
Max. Turn-On Time	
Zero Crossing	: 10ms
Max. Turn-off Time	: 10ms
Max. Surge Current (@10 ms) (25A)	: 300A
Max. I <sup>2</sup> t For Fusing (@10ms) (60A)	: 450A <sup>2</sup> S
Transient Over Voltage	: 600Vpk
Max. Off-State Leakage Current [@ Rated Voltage]	: 5mA
Max. On-State Voltage Drop [@ Rated Current]	: 1.5Vrms
Min. Off-State dv/dt[@Maximum Rated Voltage]	: 500V/ $\mu$ s


# Solid State Relay



## General Information


Dielectric Strength (50/60Hz)  
 Input/Output :  $\cong 4000V_{rms}$   
 Input, Output/Base :  $\cong 2500V_{rms}$   
 Ambient Operating Temperature Range :  $-30^{\circ}C$  to  $+80^{\circ}C$   
 Ambient Storage Temperature Range :  $-30^{\circ}C$  to  $+100^{\circ}C$   
 Weight (Typical) (Quick Connection Terminal) : 100g

## Diagram

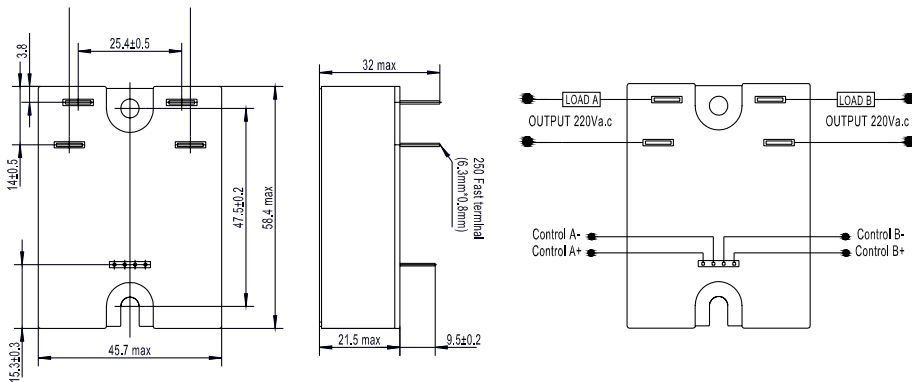

Dimensions : Millimetres

## Thermal Curve

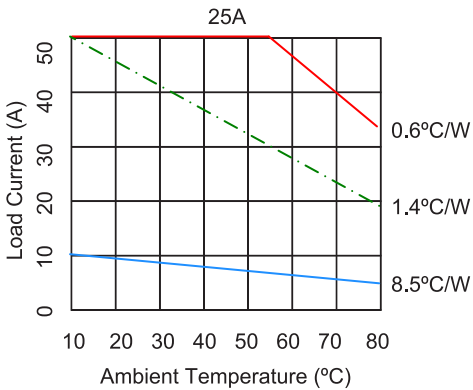

## Part Number Table

Description	Part Number
SSR, DUAL, 25A, 240V AC	MCKSID240LD25P

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell Limited 2016.

www.element14.com  
 www.farnell.com  
 www.newark.com

