

## Base strip - MSTBV 2,5/ 5-GF-5,08 - 1777109

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 5, pitch: 5.08 mm, Color: green, contact surface: Tin, mounting: Wave soldering



The figure shows a 10-position version of the product

### Why buy this product

- ✓ Maximum flexibility when it comes to device design – one header for connectors with different connection technologies
- ✓ Well-known mounting principle allows worldwide use
- ✓ Vertical connection enables multi-row arrangement on the PCB
- ✓ Screwable flange for superior mechanical stability

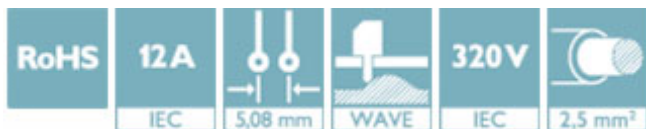

### Key Commercial Data

|                                      |               |
|--------------------------------------|---------------|
| Packing unit                         | 250 STK       |
| GTIN                                 |               |
| GTIN                                 | 4017918039271 |
| Weight per Piece (excluding packing) | 3.600 g       |
| Custom tariff number                 | 85366930      |
| Country of origin                    | Germany       |

### Technical data

#### Dimensions

|                          |          |
|--------------------------|----------|
| Length [ l ]             | 8.6 mm   |
| Pitch                    | 5.08 mm  |
| Dimension a              | 20.32 mm |
| Width [ w ]              | 35.56 mm |
| Constructional height    | 12 mm    |
| Height [ h ]             | 15.9 mm  |
| Length of the solder pin | 3.9 mm   |
| Pin dimensions           | 1 x 1 mm |

# Base strip - MSTBV 2,5/ 5-GF-5,08 - 1777109

## Technical data

### Dimensions

|               |        |
|---------------|--------|
| Hole diameter | 1.4 mm |
|---------------|--------|

### General

|  |                  |
|--|------------------|
| Range of articles                      | MSTBV 2,5/...-GF |
| Insulating material group              | IIIa             |
| Rated surge voltage (III/3)            | 4 kV             |
| Rated surge voltage (III/2)            | 4 kV             |
| Rated surge voltage (II/2)             | 4 kV             |
| Rated voltage (III/3)                  | 250 V            |
| Rated voltage (III/2)                  | 320 V            |
| Rated voltage (II/2)                   | 400 V            |
| Connection in acc. with standard       | EN-VDE           |
| Nominal current $I_N$                  | 12 A             |
| Maximum load current                   | 12 A             |
| Insulating material                    | PBT              |
| Flammability rating according to UL 94 | V0               |
| Color                                  | green            |
| Number of positions                    | 5                |

### Standards and Regulations


|  |        |
|--|--------|
| Connection in acc. with standard       | EN-VDE |
|  | CSA    |
| Flammability rating according to UL 94 | V0     |

### Environmental Product Compliance


|            |   |
|------------|---|
| China RoHS | Environmentally Friendly Use Period = 50  |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

## Drawings

Diagram

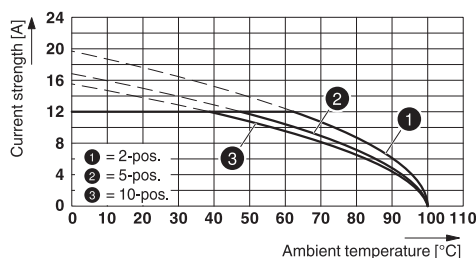


Drilling diagram

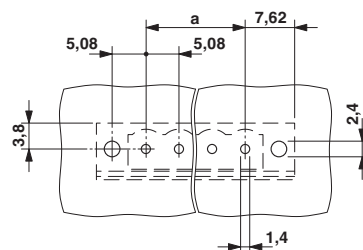


Type: TVMSTB 2,5/...-STF-5,08 with MSTBV 2,5/...-GF-5,08

# Base strip - MSTBV 2,5/ 5-GF-5,08 - 1777109

Diagram

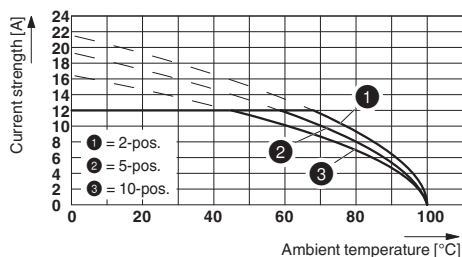

Dimensional drawing

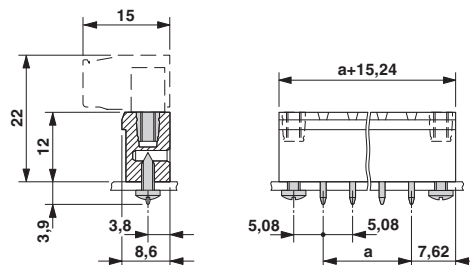

Type: TFKC 2,5/...-STF-5,08 with MSTBV 2,5/...-GF-5,08

## Classifications

eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260704 |
| eCl@ss 7.0 | 27440402 |
| eCl@ss 8.0 | 27440402 |
| eCl@ss 9.0 | 27440402 |

ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002637 |
| ETIM 5.0 | EC002637 |
| ETIM 6.0 | EC002637 |

UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11     | 39121409 |
| UNSPSC 12.01  | 39121409 |
| UNSPSC 13.2   | 39121409 |

## Approvals

Approvals

Approvals


CSA / VDE Gutachten mit Fertigungsüberwachung / RS / IECCEB Scheme / cULus Recognized / EAC / DNV GL


Ex Approvals

# Base strip - MSTBV 2,5/ 5-GF-5,08 - 1777109


## Approvals


### Approval details


|                                |   |       |       |
|--------------------------------|---|-------|-------|
| CSA                            |  |       | 13631 |
|                                |   | B     | D     |
| Nominal current I <sub>N</sub> |   | 12 A  | 10 A  |
| Nominal voltage U <sub>N</sub> |   | 300 V | 300 V |

|  |   |  |          |
|--|---|--|----------|
| VDE Gutachten mit<br>Fertigungsüberwachung |  | <a href="http://www.vde.com/en/Institute/OnlineService/VDE-approved-products/Pages/Online-Search.aspx">http://www.vde.com/en/Institute/OnlineService/<br/>VDE-approved-products/Pages/Online-Search.aspx</a> | 40004701 |
|  |   |  |          |
| Nominal current I <sub>N</sub>             |   | 12 A   |          |
| Nominal voltage U <sub>N</sub>             |   | 250 V  |          |

|    |   |   |              |
|----|---|---|--------------|
| RS |  | <a href="http://www.rs-head.spb.ru/en/index.php">http://www.rs-head.spb.ru/en/index.php</a> | 10.04059.250 |
|----|---|---|--------------|

|                                |   |   |                |
|--------------------------------|---|---|----------------|
| IECEE CB Scheme                |  | <a href="http://www.iecee.org/">http://www.iecee.org/</a> | DE1-58978-B1B2 |
|                                |   |   |                |
| Nominal current I <sub>N</sub> |   | 12 A  |                |
| Nominal voltage U <sub>N</sub> |   | 250 V   |                |

|                                |   |   |                 |
|--------------------------------|---|---|-----------------|
| cULus Recognized               |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | E60425-19931011 |
|                                |   | B   | D               |
| Nominal current I <sub>N</sub> |   | 12 A  | 10 A            |
| Nominal voltage U <sub>N</sub> |   | 300 V   | 300 V           |

|     |   |  |         |
|-----|---|--|---------|
| EAC |  |  | B.01742 |
|-----|---|--|---------|

|        |   |            |
|--------|---|------------|
| DNV GL | <a href="http://exchange.dnv.com/tari/">http://exchange.dnv.com/tari/</a> | TAE00001EY |
|--------|---|------------|

## Base strip - MSTBV 2,5/ 5-GF-5,08 - 1777109

### Accessories

Accessories

Coding element

Coding star - CR-MSTB - 1734401



Coding section, inserted into the recess in the header or the inverted plug, red insulating material

---

### Filler plug

Accessories - MSTB-BL - 1755477



Keying cap, for forming sections, plugs onto header pin, green insulating material

---

### Labeled terminal marker

Marker card - SK 5,08/3,8:FORTL.ZAHLEN - 0804293



Marker card, Card, white, labeled, Horizontal: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - (99)100, Mounting type: adhesive, for terminal block width: 5.08 mm, Lettering field: 5.08 x 3.8 mm

---

### Marker pen

Marker pen - B-STIFT - 1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

---

### Terminal marking

## Base strip - MSTBV 2,5/ 5-GF-5,08 - 1777109

### Accessories

Marker card - SK 5,08/3,8:UNBEDRUCKT - 0805412



Marker card, Card, white, unlabeled, can be labeled with: Marker pen, Mounting type: adhesive, for terminal block width: 5.08 mm, Lettering field: 5.08 x 3.8 mm

---

### Additional products

Printed-circuit board connector - TVMSTB 2,5/ 5-STF-5,08 - 1719121



Plug component, nominal current: 12 A, rated voltage (III/2): 400 V, number of positions: 5, pitch: 5.08 mm, connection method: Screw connection with tension sleeve, Color: green, contact surface: Tin

---

Printed-circuit board connector - FKCN 2,5/ 5-STF-5,08 - 1754827



Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 5, pitch: 5.08 mm, connection method: Push-in spring connection, Color: green, contact surface: Tin

---

Printed-circuit board connector - FRONT-MSTB 2,5/ 5-STF-5,08 - 1777837



Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 5, pitch: 5.08 mm, connection method: Front screw connection, Color: green, contact surface: Tin

---

Printed-circuit board connector - MSTB 2,5/ 5-STF-5,08 - 1778014



Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 5, pitch: 5.08 mm, connection method: Screw connection with tension sleeve, Color: green, contact surface: Tin

## Base strip - MSTBV 2,5/ 5-GF-5,08 - 1777109

### Accessories

#### Printed-circuit board connector - MSTBT 2,5/ 5-STF-5,08 - 1805330

Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 5, pitch: 5.08 mm, connection method: Screw connection with tension sleeve, Color: green, contact surface: Tin



#### Printed-circuit board connector - MSTBC 2,5/ 5-STZF-5,08 - 1809763

Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 5, pitch: 5.08 mm, connection method: Crimp connection, Color: green, Corresponding female crimp contacts with current [A] and conductor cross section range [mm<sup>2</sup>] data: 10A/MSTBC-MT 0,5-1,0 (3190564); 10A/MSTBC-MT 0,5-1,0 BA (3190645); 12A/MSTBC-MT 1,5-2,5 (3190551); 12A/MSTBC-MT 1,5-2,5 BA (3190658). BA = Bandkontakte



#### Printed-circuit board connector - MVSTBW 2,5/ 5-STF-5,08 - 1834932

Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 5, pitch: 5.08 mm, connection method: Screw connection with tension sleeve, Color: green, contact surface: Tin



#### Printed-circuit board connector - MVSTBR 2,5/ 5-STF-5,08 - 1835122

Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 5, pitch: 5.08 mm, connection method: Screw connection with tension sleeve, Color: green, contact surface: Tin



#### Printed-circuit board connector - TMSTBP 2,5/ 5-STF-5,08 - 1853133

Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 5, pitch: 5.08 mm, connection method: Screw connection with tension sleeve, Color: green, contact surface: Tin, The plug allows conductors to be looped through from module to module.



## Base strip - MSTBV 2,5/ 5-GF-5,08 - 1777109

### Accessories

Printed-circuit board connector - FKC 2,5/ 5-STF-5,08 - 1873236

Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 5, pitch: 5.08 mm, connection method: Push-in spring connection, Color: green, contact surface: Tin



Printed-circuit board connector - FKCVW 2,5/ 5-STF-5,08 - 1873838

Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 5, pitch: 5.08 mm, connection method: Push-in spring connection, Color: green, contact surface: Tin




Printed-circuit board connector - FKCVR 2,5/ 5-STF-5,08 - 1874138

Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 5, pitch: 5.08 mm, connection method: Push-in spring connection, Color: green, contact surface: Tin



Printed-circuit board connector - QC 1/ 5-STF-5,08 - 1883381

Plug component, nominal current: 10 A, rated voltage (III/2): 630 V, number of positions: 5, pitch: 5.08 mm, connection method: Displacement connection, Color: green, contact surface: Tin



Printed-circuit board connector - FKCT 2,5/ 5-STF-5,08 - 1902330

Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 5, pitch: 5.08 mm, connection method: Push-in spring connection, Color: green, contact surface: Tin





## Base strip - MSTBV 2,5/ 5-GF-5,08 - 1777109

### Accessories

Printed-circuit board connector - TFKC 2,5/ 5-STF-5,08 - 1962723



Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 5, pitch: 5.08 mm, connection method: Push-in spring connection, Color: green, contact surface: Tin

---

Printed-circuit board connector - SMSTB 2,5/ 5-STF-5,08 - 1971099



Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 5, pitch: 5.08 mm, connection method: Screw connection with tension sleeve, Color: green, contact surface: Tin

---

Printed-circuit board connector - FKCS 2,5/ 5-STF-5,08 - 1975299



Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 5, pitch: 5.08 mm, connection method: Push-in spring connection, Color: green, contact surface: Tin

---

---