

SL, SDL SERIES

(2.54 mm) .100"

LOW-PROFILE MACHINED SOCKET STRIPS

FEATURES

- Achieve low-profile without sacrificing insertion depth!
- Choice of four precision screw machined lead styles.
- Exceptionally low-profile, down to (2.11 mm) .083" off of board.
- Mates with BBL or BDL for board stacking spaces down to (3.89 mm) .153"

SPECIFICATIONS

For complete specifications see www.samtec.com?SL or www.samtec.com?SDL

Insulator Material: Black Glass Filled Polyester
Contact/Shell Materials: BeCu/Brass

Plating:

Au or Sn over
 50 μ" (1.27 μm) Ni
Operating Temp Range:
 -55 °C to +125 °C with Gold
 -55 °C to +105 °C with Tin
RoHS Compliant: Yes
Lead-Free Solderable:
 Wave only


RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality




Note: Some lengths, styles and options are non-standard, non-returnable.

Mates with:
 TS, TD, HTS, BBS, BBD,
 BBL, BDL, BHS

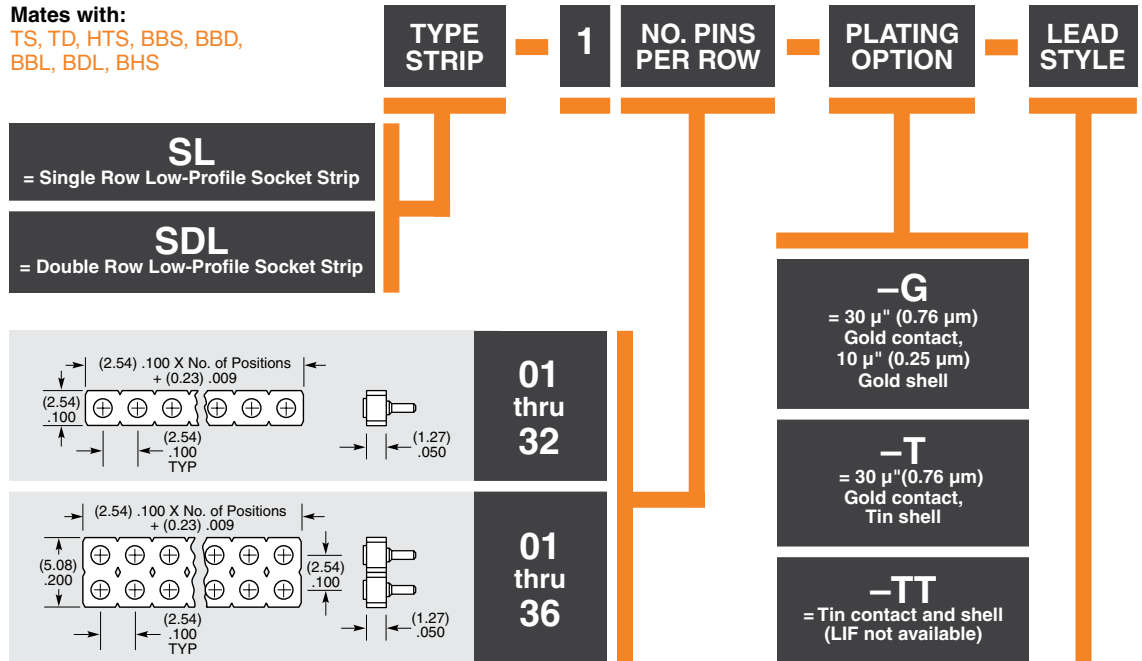

Low Insertion Force (LIF) Available

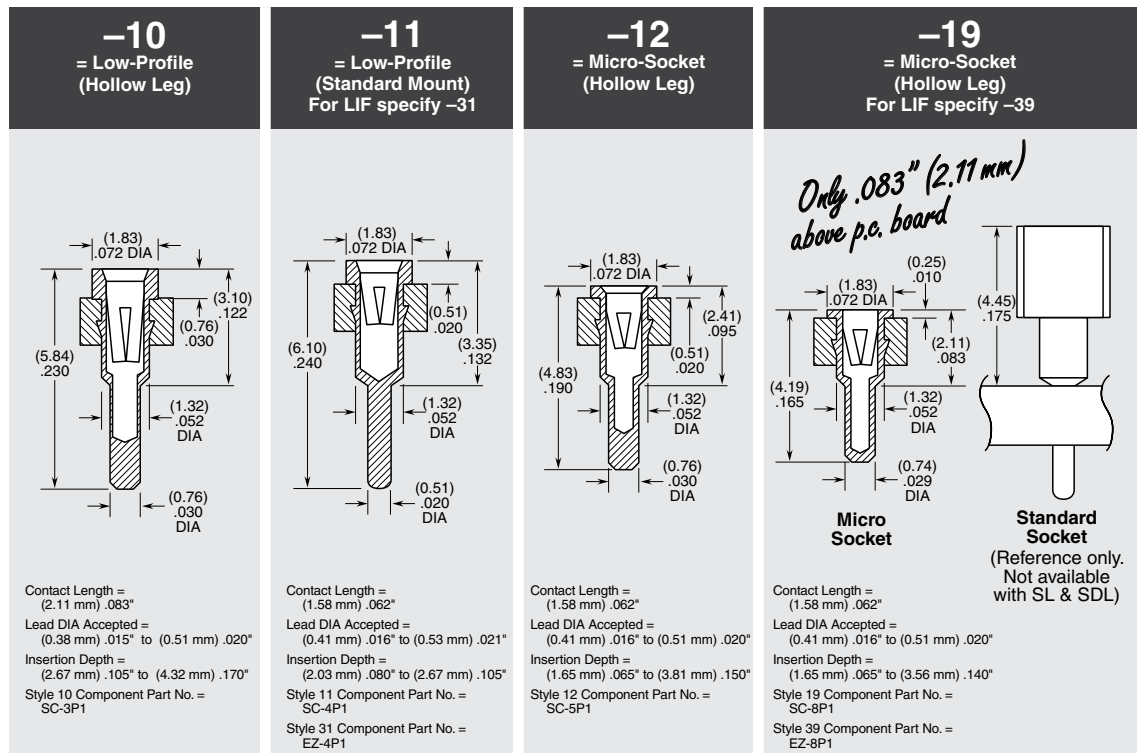

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications. Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.