



Power Inductors

MODEL HA72L-0530 series


Features

- Operating Temperature Range -55°C to +155°C
- Ambient Temperature, Maximum +115°C
- Temperature Rise, 40°C
- RoHS Compliant
- AEC-Q200 Certified

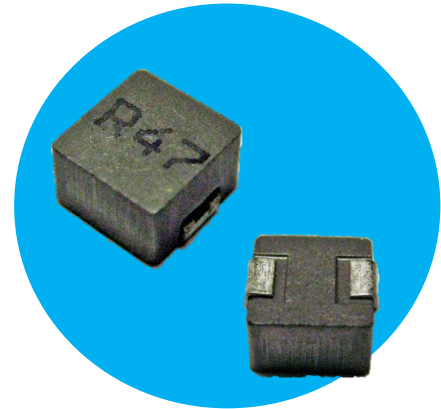

 All parts are Pb-free and comply with EU Directive 2011/65/EU (RoHS2)

Schematic

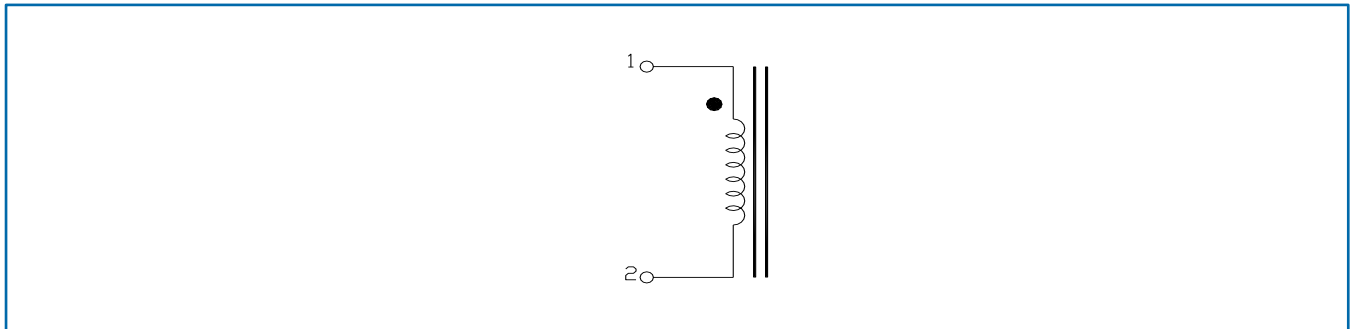

Specifications @ 25°C

Part Number	Inductance ($\mu\text{H} \pm 20\%$ @0A)	DCR (m Ω) Typ	DCR (m Ω) Max	I _{rms} (A)	I _{sat} (A)	Part Number	Inductance ($\mu\text{H} \pm 20\%$ @0A)	DCR (m Ω) Typ.	DCR (m Ω) Max	I _{rms} (A)	I _{sat} (A)
HA72L-0530R20LFTR	0.20	3.5	3.9	18.0	14.5	HA72L-05302R2LFTR	2.20	25.0	29.0	5.5	7.5
HA72L-0530R47LFTR	0.47	7.4	8.5	13.5	12.0	HA72L-05303R3LFTR	3.30	32.0	38.0	5.0	6.0
HA72L-0530R68LFTR	0.68	11.0	12.0	8.5	14.0	HA72L-05304R7LFTR	4.70	50.0	60.0	3.5	5.0
HA72L-05301R0LFTR	1.00	13.0	14.0	7.0	11.0	HA72L-05306R8LFTR	6.80	75.0	90.0	3.0	4.0
HA72L-05301R2LFTR	1.20	15.0	16.0	6.5	11.0	HA72L-0530100LFTR	10.0	110	125	2.5	3.5
HA72L-05301R5LFTR	1.50	20.0	25.0	6.0	8.5						

- Notes: (1) I_{sat} is the saturation current at which inductance rolls off approximately 30% from its initial (zero DC)
 (2) I_{rms} is the approximate current at which $\Delta T = 40^\circ\text{C}$
 (3) Operating Temperature Range -55°C to +155°C









General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
 All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

BI Technologies
 A-1445, Jalan Tanjung Api
 25050 Kuantan Pahang Darul Makmur
 Malaysia
 Ph: +60 9 565 8888 Fax: +60 9 514 3555

MODEL HA72L-0530 series

Electrical Characteristics @ 25°C

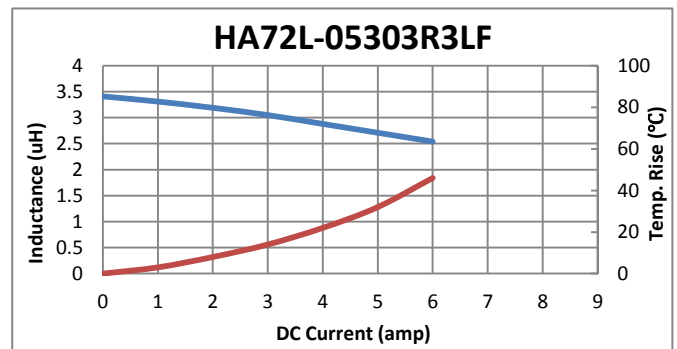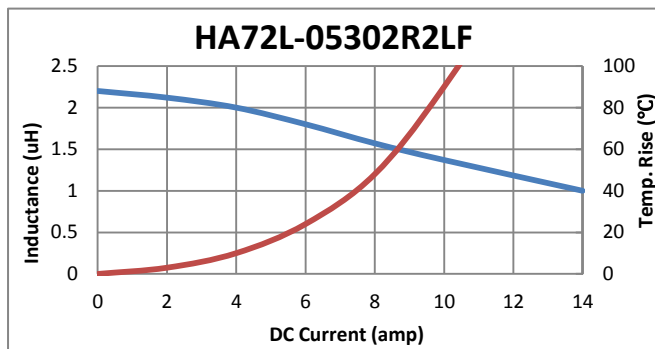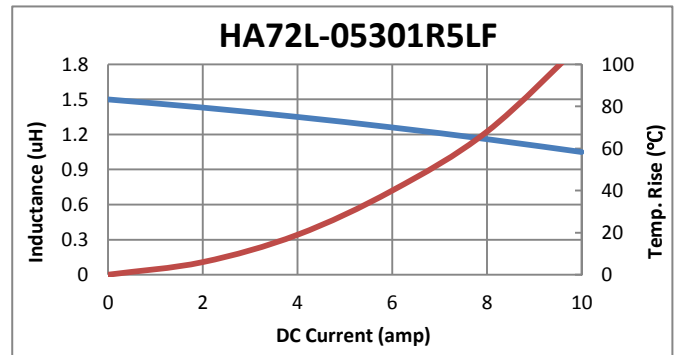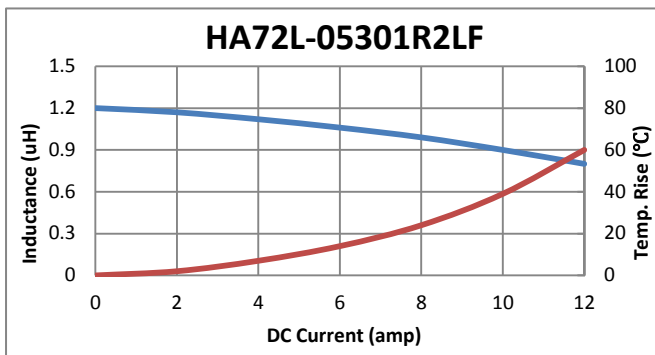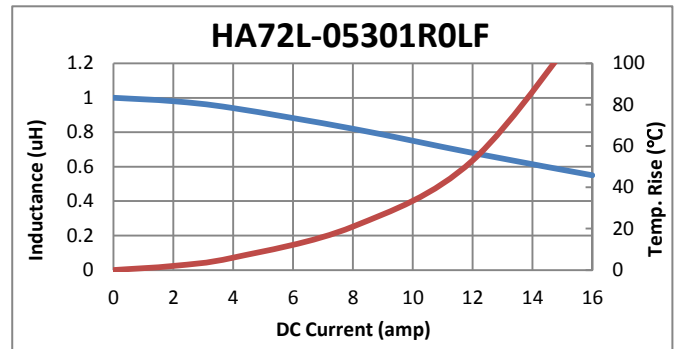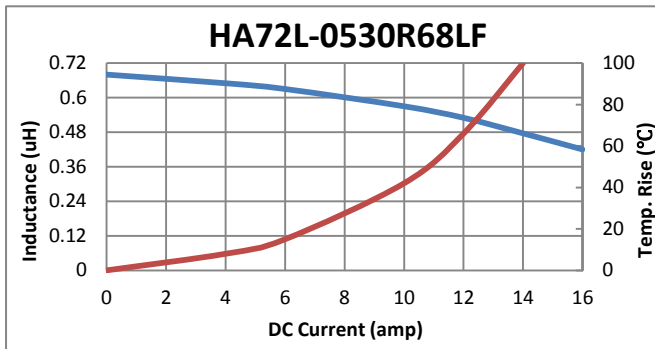
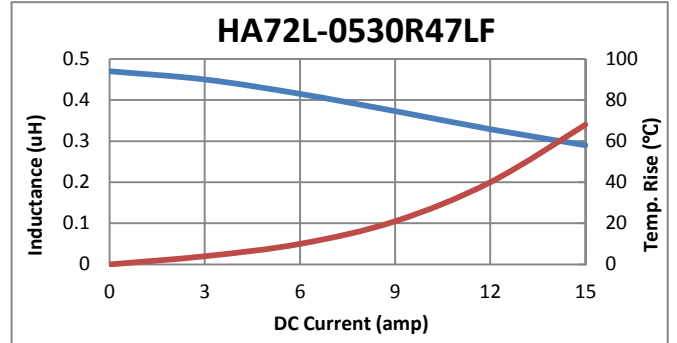
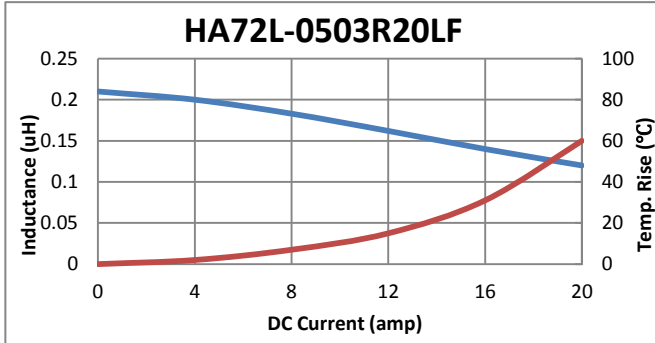


General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

MODEL HA72L-0530 series

Electrical Characteristics @ 25°C

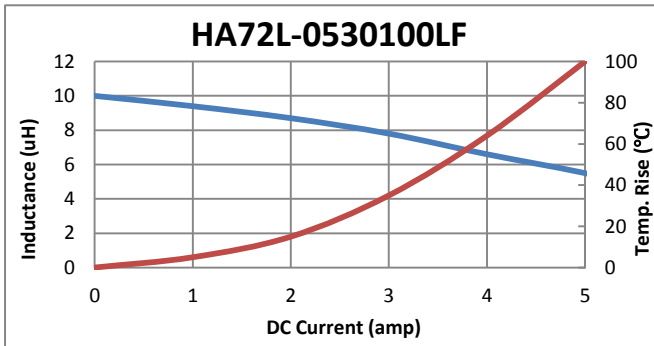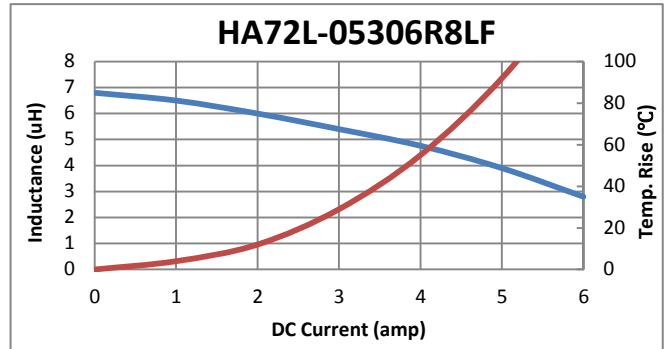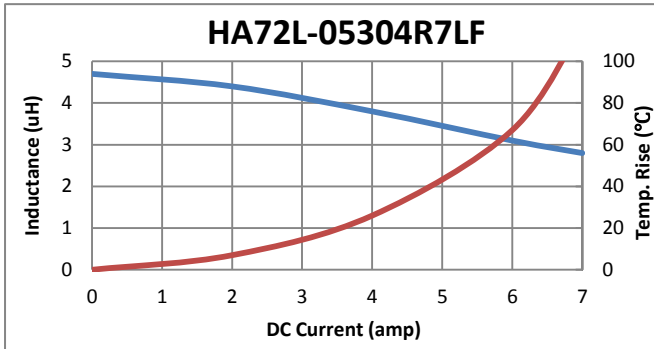

Outline dimensions (mm)

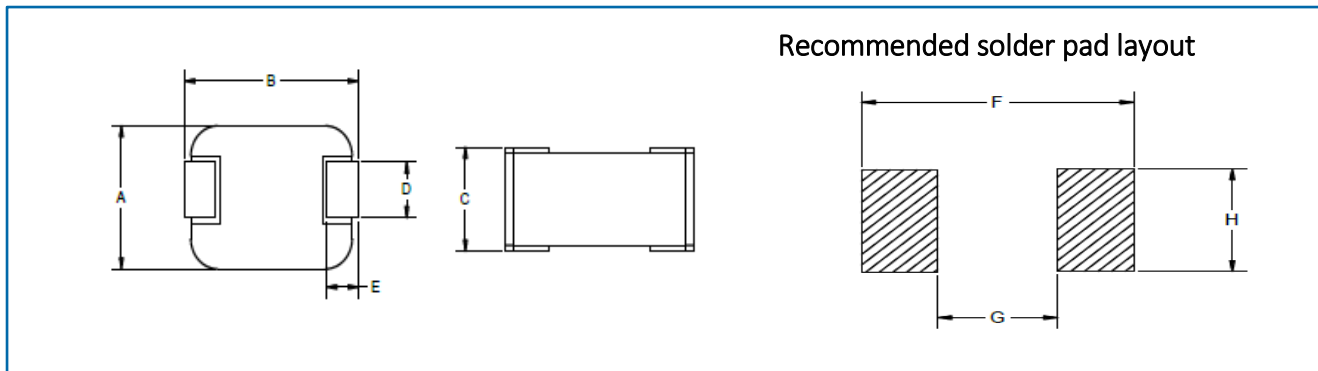

CASE SIZE	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)	H(mm)
0530 series	5.20 ± 0.3	5.40 ± 0.3	3	2.2 ± 0.3	1.2 ± 0.2	5.99	2.20	2.50

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


BI Technologies
 A-1445, Jalan Tanjung Api
 25050 Kuantan Pahang Darul Makmur
 Malaysia
 Ph: +60 9 565 8888 Fax: +60 9 514 3555

MODEL HA72L-0530 series

Packaging

Standard:	Embossed Tape and Reel			
	Reel:	Diameter	All case size	= 13" (330mm)
		Capacity	Case size 0530	= 2,000 units

Ordering information

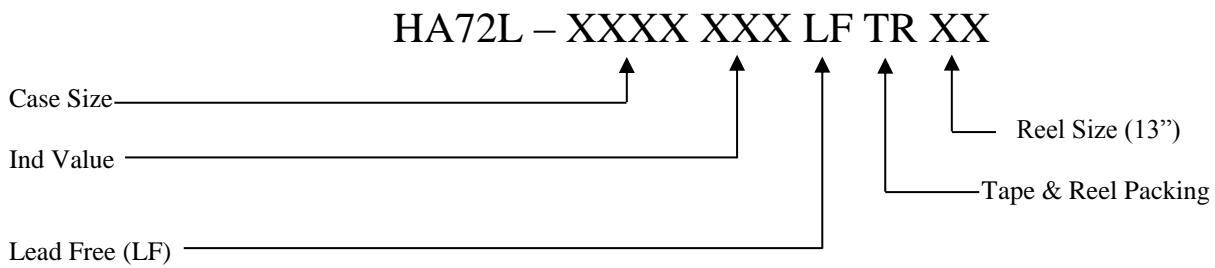

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
 All information is subject to TT Electronics' own data and is considered accurate at time of going to print.