


Screened Multicore Cable to Defence Standard 61-12 Part 4 7-2-*C

pro-POWER

RoHS
Compliant

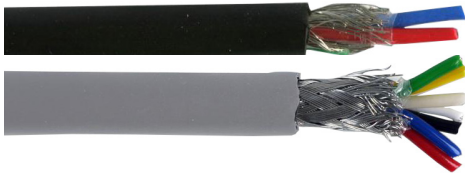

Description

This screened multicore cable is manufactured to Defence Standard 61-12 Part 4 and is designed for high density wiring between components and within instruments and electronic equipment. It is not to be used for the direct connection to Mains Power Supplies.

Reference Standard

Multicore Cable to DEF. STAN. 61-12 part 4. 0.22mm² (7/0.2mm) Conductors, Braid Screened with Black and Grey PVC Jacket

Cable Construction

Conductor

Electrolytic Annealed Tinned Copper Conductor 7/0.2mm

Nominal Core Resistance @ 20°C : 92Ω/km

Current Rating (per core) : 1 Amp

Insulation and Conductors

Core insulation of PVC to BS676 type Nom. Radial Thickness 0.3mm

Insulation Resistance : Min. 100MΩ×km

Nominal Overall Ø of Conductor : 1.2mm

Conductors Colour Coded as per DEF. STAN. 61-12 Part 4

Cores wrapped with Plastic Tape

Test Voltage (1 minute, core to core) : 1000V

Braid Screen

0.1mm Ø TACW Braid : Fill factor 70% (nom)

Outer Sheath

Black and Grey (RAL 7001) PVC jacket to BS6746 Type 6

Temperature Range : 0°C to +70°C

Nominal Voltage : 440V AC rms @ 1600Hz

Minimum Bending Radius : 6 × cable Ø

Insulation Colours table

Core Number	Colour
1	Red
2	Blue
3	Green
4	Yellow
5	White
6	Black

Core Number	Colour
7	Brown
8	Violet
9	Orange
10	Pink
11	Turquoise
12	Grey

Core Number	Colour
13	Red/Blue
14	Green/Red
15	Yellow/Red
16	White/Red
17	Red/Black
18	Red/Brown

Core Number	Colour
19	Yellow/Blue
20	White/Blue
21	Blue/Black
22	Orange/Blue
23	Green/Blue
24	Grey/Blue

Screened Multicore Cable to Defence Standard 61-12 Part 4 7-2-*C



Core Number	Colour
25	Yellow/Green
26	White/Green
27	Green/Black
28	Orange/Green

Core Number	Colour
29	Grey/Green
30	Yellow/Brown
31	White/Brown
32	Brown/Black

Core Number	Colour
33	Grey/Brown
34	Yellow/Violet
35	Violet/Black
36	White/Violet

Part Number Table

Description	No. of Cores	Jacket Colour	Diameter over Cores (mm)	Diameter over Screen (mm)	Jacket Radial Thickness (mm)	Jacket Diameter (mm)	Reel Length (m)	Part Number	
Cable, Screen, DEF 7-2-2C	2	Black	2.4	2.9	0.45	3.9	25	PP000307	
							100	PP000308	
Cable, Screen, DEF 7-2-3C	3		2.6	3.1		4.1	25	PP000309	
							100	PP000310	
Cable, Screen, DEF 7-2-4C	4		Grey	2.9		3.4	4.4	25	PP000311
								100	PP000312
								500	PP000313
								25	PP000244
Cable, Screen, DEF 7-2-6C	6		Black	3.6		4.4	5.6	100	PP000245
								25	PP000314
Cable, Screen, DEF 7-2-8C	8		Black	4.1		4.8	5.9	25	PP000315
								100	PP000316
		25			PP000317				
		100			PP000318				
Cable, Screen, DEF 7-2-10C	10	Grey	4.8	5.5	6.4	25	PP000246		
						100	PP000247		
Cable, Screen, DEF 7-2-12C	12	Black	5	5.8	0.55	6.9	25	PP000319	
							100	PP000320	
							25	PP000321	
							100	PP000248	
Cable, Screen, DEF 7-2-15C	15	Grey	5.5	6.3	0.65	7.6	25	PP000249	
							100	PP000322	
Cable, Screen, DEF 7-2-18C	18	Black	6	6.8	8.2	25	PP000323		
						100	PP000324		
Cable, Screen, DEF 7-2-20C	20	Black	6.4	7.2	8.5	25	PP000325		
						100	PP000326		
							25	PP000327	

Screened Multicore Cable to Defence Standard 61-12 Part 4 7-2-*C



Description	No. of Cores	Jacket Colour	Diameter over Cores (mm)	Diameter over Screen (mm)	Jacket Radial Thickness (mm)	Jacket Diameter (mm)	Reel Length (m)	Part Number
Cable, Screen, DEF 7-2-20C	20	Grey	6.4	7.2	0.65	8.5	25	PP000250
							100	PP000251
Cable, Screen, DEF 7-2-25C	25	Black	7.2	8		9.5	25	PP000328
							100	PP000329
Cable, Screen, DEF 7-2-36C	36		8.4	9.2		10.8	25	PP000330
							100	PP000331
			Grey	25	PP000252			
				100	PP000253			

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-POWER is the registered trademark of the Group. © Premier Farnell Limited 2016.