

VW3A46174

passive filter - 369 A - 460 V - 60 Hz - for variable speed drive



Main

Product or component type	Passive filter
Product specific application	Reduction of current harmonics

Complementary

Range compatibility	Altivar 61 Altivar 71
[Us] rated supply voltage	480 V (+/- 10 %)
Supply frequency	60 Hz (tolerance: +/- 2 %)
Quantity per drive	3 filters per drive for variable speed drive ATV61H motor: 560 kW / 800 hp 3 filters per drive for variable speed drive ATV61Q motor: 560 kW / 800 hp 2 filters per drive for variable speed drive ATV71H motor: 250 kW / 400 hp 1 filter per drive for variable speed drive ATV61H motor: 220 kW / 350 hp 1 filter per drive for variable speed drive ATV71H motor: 200 kW / 300 hp 1 filter per drive for variable speed drive ATV61Q motor: 200 kW / 300 hp 1 filter per drive for variable speed drive ATV61Q motor: 220 kW / 350 hp 1 filter per drive for variable speed drive ATV71Q motor: 200 kW / 300 hp 1 filter per drive for variable speed drive ATV71Q motor: 220 kW / 350 hp
[In] rated current	355 A for input 369 A for output
Network number of phases	3 phases
THDI	5 % for variable speed drive ATV61H motor: 560 kW / 800 hp 5 % for variable speed drive ATV61Q motor: 560 kW / 800 hp 5 % for variable speed drive ATV71H motor: 250 kW / 400 hp 5 % for variable speed drive ATV61H motor: 220 kW / 350 hp 5 % for variable speed drive ATV71H motor: 200 kW / 300 hp 5 % for variable speed drive ATV61Q motor: 200 kW / 300 hp 5 % for variable speed drive ATV61Q motor: 220 kW / 350 hp 5 % for variable speed drive ATV71Q motor: 200 kW / 300 hp 5 % for variable speed drive ATV71Q motor: 220 kW / 350 hp
Max current	1.5 x nominal current (duration = 60 s)
Efficiency	<= 98 %
Thermal losses	1406 W
Cos phi	1 at 150 % of line current 0.85 at 75 % of line current 0.99 at 100 % of line current
Electrical connection	A, B terminal, connection capacity: 2.5 mm ² X1-1...X2-3 terminal, connection capacity: 25...300 mm ²
Electrical insulation class	Class F
Product weight	229 kg

Environment

IP degree of protection	IP20 IP55 (enclosure mounting)
vibration resistance	2 mm peak to peak (f = 5...13.2 Hz) conforming to EN 60068-2-6 0.7 gn (f = 13.2...150 Hz) conforming to EN 60068-2-6
relative humidity	5...85 % without condensation
ambient air temperature for operation	> 45...60 °C with current derating 3 % per °C 5...45 °C without current derating


The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

ambient air temperature for storage	> -25...55 °C storage in original packaging > -25...65 °C during transport
operating altitude	<= 1000 m without current derating > 1000...4000 m with current derating 5 % per 1000 m
standards	EN/IEC 61000-3-2 EN/IEC 61000-3-12 EN/IEC 61000-3-4 EN/IEC 61000-2-2 EN/IEC 61000-2-4 G5/4 engineering recommendation

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 1329 - Schneider Electric declaration of conformity

Dimensions

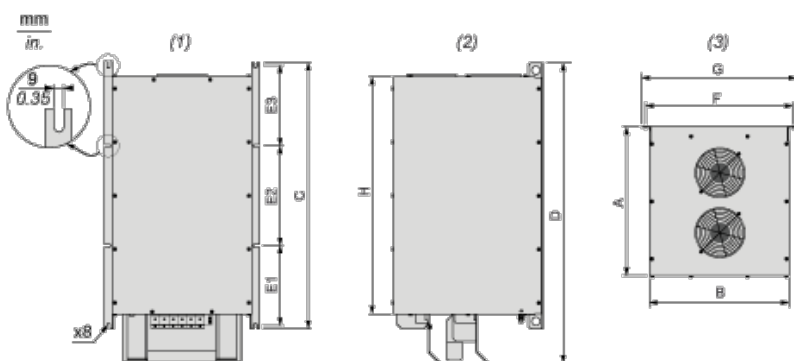

- (1) Front view
- (2) Right side view
- (3) Top view

Dimensions in mm

A	B	C	D	E1	E2	E3	F	G	H
510	420	800	900.06	240	300	240	443	468	713

Dimensions in in.

A	B	C	D	E1	E2	E3	F	G	H
20.00	16.54	31.50	35.43	9.45	11.81	9.45	17.44	18.43	28.07

Mounting Recommendations

Vertical Mounting Only

